

Inductive proximity sensors OsiSense XS

Catalogue



Inductive proximity sensors

OsiSense XS

Selection guidepage 2

- Generalpage 12
- Flush mountability using teach mode:
Simplicity through innovationpage 22

OsiSense XS, general purpose

- Cylindrical type
 - Standard range, flush mountablepage 24
 - Increased range, flush mountablepage 34
 - Increased range, non flush mountablepage 42
- Block type
 - Standard range, flush mountablepage 46
 - Increased range, flush or non flush mountable using teach modepage 80
- Cubic type
 - Standard range, non flush mountablepage 50
 - Increased range, flush or non flush mountablepage 50
- Multivoltage sensors with short-circuit protectionpage 60
- Sensors with 2 complementary outputs
 - Solid-state PNP or NPN, NO + NC outputspage 62
 - Solid-state PNP + NPN, NO or NC programmable outputspage 64
- Plastic case sensorspage 66
(for chemical processing, marine applications)
- Basic sensors, flush and non flush mountable pages 34 and 35,
68 and 70
- Quasi flush mountable sensors, increased rangepage 74
- Miniature sensorspage 76

OsiSense XS Application

- Adjustable range sensorspage 78
- Sensors for rotation monitoringpage 83
- Sensors with analogue outputpage 87
- Sensors for food/beverage and pharmaceutical applications
 - Cubic, plasticpage 94
 - Cylindrical, stainless steelpages 96 to 101
 - Cylindrical, plasticpages 102 to 105
 - Cylindrical, stainless steel, for harsh industrial
environmentspages 106
- Sensors for assembly, packaging, conveying or light handling applications
 - 12 x 26 x 40 mm formatpage 108
 - 80 x 80 x 40 mm formatpage 112
- Sensors for welding machine applicationspages 114 to 119
- Fixed sensing distance detection for ferrous and
non ferrous materialspages 120 to 125
- Selective detection of ferrous and non ferrous materialspage 126

OsiSense XS

- Accessories *page 128*
- Detection curves *page 132*
- Substitution table *page 136*

Technical information

- Protective treatment of equipment according
to climatic environment *page 142*
- Product standards and certifications *page 144*
- Degrees of protection provided by enclosures *page 146*
- **Product reference index** *page 148*

Inductive proximity sensors
OsiSense XS
General purpose

Cylindrical type

Standard range



Sensing distance Sn (mm)	
Diameter	
Short case	Supply
	3-wire $\overline{\text{---}}$ (PNP/NPN)
	2-wire $\overline{\text{---}}$
Long case	Supply
	3-wire $\overline{\text{---}}$ (PNP/NPN)
	2-wire $\overline{\text{---}}$
	2-wire $\overline{\text{---}}$
Function	NO
	NC
Connection	Pre-cabled (L = 2 m) (1)
	M8 connector, 3-pin (3-wire $\overline{\text{---}}$)
	M12 connector
	1/2"-20UNF connector
	Remote connector
Degree of protection	
Special temperatures	- 40 °C, + 70 °C
	- 25 °C, + 85 °C
Type reference	
Pages	

1.5	2	5	10	
Ø 6.5 plain and M8	M12	M18	M30	
Page 24				
Page 28				
Page 25				
Page 29				
–	Page 32			
•	•	•	•	
•	•	•	•	
•	•	•	•	
•	–	–	–	
•	•	•	•	
–	•	•	•	
Remote connectors available: M8, M12, M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre				
IP 65 and IP 67, IP 68 for pre-cabled version, IP 69K for diameters 12 to 30				
Add the suffix TF to the end of the reference (2)				
Add the suffix TT to the end of the reference (2)				
XS506	XS508	XS512	XS518	XS530
24 to 33				

(1) Also available in lengths of 5 and 10 m, depending on model
(2) Product availability depending on model: please consult our Customer Care Centre.

Increased range



2.5	4	8	15	7	12	22
Ø 6.5 plain and M8	M12	M18	M30	M12	M18	M30
Pages 34 and 35				–		
Page 38				–		
Page 36				Page 42		
Page 38				–		
–	Page 40			–	Page 44	
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	–	–	–	–	–	–
•	•	•	•	•	•	•
–	•	•	•	–	•	•
Remote connectors available: M8, M12, M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre						
IP 65 and IP 67, IP 68 for pre-cabled version, IP 69K for diameters 12 to 30				IP 65 and IP 67, IP 68 for pre-cabled version, IP 69K for diameters 12 to 30		
Add the suffix TF to the end of the reference (2)						
Add the suffix TT to the end of the reference (2)						
XS106 XS606	XS108 XS608	XS112, XS612	XS118, XS618	XS130, XS630	XS612	XS618 XS630
34 to 41				42 to 45		

Inductive proximity sensors
OsiSense XS
General purpose

Block type		Standard range				
		Flush mountable				
						
Sensing distance Sn (mm)		2.5	5	10	15	40
Dimensions (W x H x D)		8 x 22 x 8	15 x 32 x 8	26 x 26 x 13	40 x 40 x 15	80 x 80 x 26
Supply	3-wire --- (PNP/NPN)	Page 46	Page 46	Page 48	Page 48	Page 48
	2-wire ---	Page 46	Page 46	Page 48	Page 48	Page 48
	~	–	–	–	–	–
	~	–	–	–	–	–
Function	NO	•	•	•	•	•
	NC	•	•	•	•	•
	NO + NC	–	–	–	–	–
	NO/NC	–	–	–	–	–
Connection	Pre-cabled (L = 2 m) (1)	•	•	•	•	•
	M8 connector, 3-pin (3-wire ---)	–	–	•	•	–
	M12 connector	–	–	–	–	•
	1/2"-20UNF connector	–	–	–	–	–
	Screw terminals	–	–	–	–	–
	Remote connector	•	•	–	–	–
	M8	–	–	•	•	–
	M12	–	–	–	–	–
Degree of protection	Other remote connectors available	–	–	–	–	–
		M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre				
Special temperatures		IP 67				
		IP 67, double insulation ☐ or IP 68, double insulation ☐, depending on model				
Type reference		Add the suffix TF to the end of the reference (2)				
		Add the suffix TT to the end of the reference (2)				
Pages		XS7J	XS7F	XS7E	XS7C	XS7D
		46		48		

(1) Also available in lengths of 5 and 10 m, depending on model.
(2) Product availability depending on model: please consult our Customer Care Centre.

Standard and increased ranges		
Flush mountable		Non flush mountable
		
15	20	40
40 x 40 x 70 and 40 x 40 x 117		
Pages 50, 52 and 54		
Pages 50, 52 and 54		
Page 56		
Pages 50, 52 and 56		
•	•	•
•	•	•
–	•	•
•	•	•
–	–	–
–	–	–
•	•	•
•	•	•
•	•	•
–	–	–
–	–	–
–	–	–
–	–	–
IP 65, IP 67 and IP 69K		
Add the suffix TF to the end of the reference (2)		
Add the suffix TT to the end of the reference (2)		
XS7C2, XS7C4, XS8C2, XS8C4, XS7C40, XS8C40, XS7T4 and XS8T4		
50, 52, 54 and 58		


Inductive proximity sensors
OsiSense XS
General purpose

Sensor type: flush and non flush mountable		Multivoltage sensors	Sensors with 2 complementary outputs	
		With short-circuit protection	Solid-state PNP or NPN NO + NC outputs	Solid-state PNP + NPN, NO or NC programmable outputs
			 	
Sensing distance Sn (mm)	Flush mountable Non flush mountable	2 ... 10 4 ... 15	1.5 ... 10 2.5 ... 15	2 ... 10 4 ... 15
Diameter		Threaded: M12, M18, M30	Plain: Ø 6.5 Threaded: M8, M12, M18, M30	Threaded: M12, M18, M30
Case material		Nickel plated brass	Nickel plated brass or stainless steel or plastic	Nickel plated brass or plastic
Supply	— ~ ~	— — •	• — —	• — —
Function	NO NC NO + NC NO/NC	• • — —	— — • —	— — — • programmable
Connection	Pre-cabled (L = 2 m) (1) M8 connector, 3-pin (3-wire ---) M12 connector 1/2"-20UNF connector Remote connector	• — — •	• — • —	• — • —
		Remote connectors available: M8, M12, M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre		
Degree of protection		IP 67 or IP 68 depending on model		
Special temperatures		Add the suffix TF to the end of the reference (2) Add the suffix TT to the end of the reference (2)		
Type reference		XS1M XS2M	XS1●●●C410 XS2●●●C410	XS1M●●KP340 XS2M●●KP340 XS4P●●KP340
Pages		60	62	64

(1) Also available in lengths of 5 and 10 m, depending on model.
(2) Product availability depending on model: please consult our Customer Care Centre.
(3) Packed and sold in lots of 20

Plastic case sensors	Basic sensors		Almost flush mountable sensors	Miniature sensors
For chemical processing, marine applications	For repetitive machines			For robotic, transfer machine, assembly line applications
				
— 2.5 ... 15	1.5 ... 10 2.5 ... 15	2.5 ... 15 —	— 2.5 ... 20	1 —
Threaded: M8, M12, M18, M30	Plain: Ø 6.5 Threaded: M8, M12, M18, M30	Plain: Ø 6.5 Threaded: M8, M12, M18, M30		Plain: Ø 4 Threaded: M5
Plastic	Nickel plated brass or plastic	Nickel plated brass		Nickel plated brass or stainless steel
• — •	• — —	• — —	• — —	• — —
— • — —	• • — —	• • — —	• • — —	• • — —
• — — •	• • • —	• • • —	• • • —	• • • —
Remote connectors available: M8, M12, M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre				
IP 67 or IP 68 depending on model	IP 67		IP 67 or IP 68	IP 67
Add the suffix TF to the end of the reference (2) Add the suffix TT to the end of the reference (2)				
XS4P	XS1●●BL● XS2●●AL● XS2●●BL●	XS1●●B3●●●TQ (3)	XS1N●●349	XS1L XS2L XS1N
66	68 and 70	34 and 35	74	76

Applications



Conveying

Sensor type: flush and non flush mountable


Adjustable range sensors

Developed in accordance with the needs expressed by our customers, these sensors provide a complete solution for specific application functions: rotation monitoring, selective detection, analogue control, etc.




Sensing dist.	Flush mountable	3...11 (1)	15	25	60
Sn (mm)	Non flush mountable	5...18 (1)	–	–	–
Form	Cylindrical	M12 x 54 M18 x 67 M30 x 71	–	–	–
	Block (W x H x D) dimensions in mm	–	26 x 26 x 13	40 x 40 x15	80 x 80 x 26
Case material		Nickel plated brass	PBT	PBT	PBT
Supply		●	●	●	●
		–	–	–	–
		–	●	●	●
Function	NO	●	●	●	●
	NC	●	●	●	●
	NO + NC	–	–	–	–
	NO/NC	–	–	–	–
Connection	Pre-cabled (L = 2 m) (2)	–	●	●	●
	M8 connector, 3-pin (--- 3-wire)	–	●	●	–
	M12 connector	–	–	–	●
	1/2"-20UNF connector	–	–	–	●
	Remote connector	●	●	●	●
	Screw terminals	–	–	–	–
Degree of protection		IP 67, double insulation 	IP 67, double insulation  or IP 68, double insulation  , depending on model.		
Special temperatures	– 40 °C, + 70 °C	Add the suffix TF to the end of the reference (3)			
	– 25 °C, + 85 °C	Add the suffix TT to the end of the reference (3)			
Type reference		XS612B2 XS618 B2 XS630 B2	XS8E	XS8C	XS8D
Pages		78	80		


(1) Depending on model.
(2) Also available in lengths of 5 and 10 m, depending on model.
(3) Product availability depending on model: please consult our Customer Care Centre.



Detection of underspeed, shaft overload



Position, displacement and deformation control/monitoring



Machine with stainless steel housing

Sensors for rotation monitoring


Sensors with analogue output
0 ... 10 V or 4 ... 20 mA

Sensors for food/beverage and pharmaceutical applications
Cylindrical, stainless steel 316 L
Cylindrical, plastic



10	10...15 (1)	0.2...10 (1)	5...40 (1)	–	–	6,10 or 20 (1)	–	–
10	10...15 (1)	0.4...60 (1)	5...40 (1)	2...25	2...25	10, 20 or 40 (1)	7...22 (1)	7...22 (1)
M30 x 81	–	Threaded: M12, M18, M30	–	–	–	Threaded: M12, M18, M30	Plain: Ø 18 Threaded: M12, M18, M30	Threaded: M12, M18, M30
–	26 x 26 x 13 40 x 40 x 15	–	32 x 15 x 8 26 x 26 x 13 40 x 40 x 15 80 x 80 x 26	40 x 40 x 70	40 x 40 x 117	–	–	–
Metal	PBT	Metal or plastic	PBT	PBT	PBT	Stainless steel, 316 L	Stainless steel, 316 L	Plastic, PPS
●	●	●	●	●	●	●	●	●
–	–	–	–	–	–	–	–	–
●	●	–	–	–	–	–	●	●
–	–	–	–	–	–	●	●	●
●	●	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–
●	–	●	●	–	–	–	●	●
–	–	–	–	–	–	–	–	–
–	–	–	●	●	–	●	●	●
–	–	–	–	–	–	–	●	●
–	●	–	●	–	–	–	–	–
–	–	–	–	–	●	–	–	–
IP 67	IP 67, double insulation ☐	IP 67	IP 67 or IP 68 (pre-cabled version)	IP 65, IP 67 IP 69K	IP 65, IP 67 IP 69K	IP 68, IP 69K	IP 68 (pre-cabled version), double insulation ☐ IP 69K conforming to DIN 40050	
Add the suffix TF to the end of the reference (3)								
Add the suffix TT to the end of the reference (3)								
XSAV	XS9●11R	XS1M●●●AB1 XS4P●●AB1	XS9●●●A	XS9C2	XS9C4	XS9●●S●	XS2●●SA	XS2●●AA
83	85	87	91 and 93	94	94	96	98 and 100	102 and 104

Applications

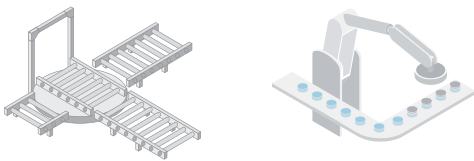

Conveying

Sensor type: flush and non flush mountable


Developed in accordance with the needs expressed by our customers, these sensors provide a complete solution for specific application functions: rotation monitoring, selective detection, analogue control, etc.

Sensors for conveying and material handling applications		
Cylindrical, stainless steel 303	12 x 40 x 26 format	80 x 80 x 40 format, increased range




Sensing dist. Sn (mm)	Flush mountable
	Non flush mountable
Form	Cylindrical
	Block (W x H x D) dimensions in mm
Case material	
Supply	11
	2
	2
Function	NO
	NC
	NO + NC
	NO/NC
Connection	Pre-cabled (L = 2 m) (2)
	M8 connector, 3-pin (--- 3-wire)
	M12 connector
	1/2"-20UNF connector
	Remote connector
	Screw terminals
Degree of protection	
Special temperatures	- 40 °C, + 70 °C
	- 25 °C, + 85 °C
Type reference	
Pages	

(1) Depending on model.
(2) Also available in lengths of 5 and 10 m, depending on model.
(3) Product availability depending on model: please consult our Customer Care Centre.



Robotics

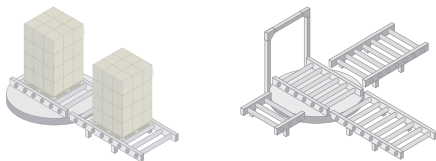

Assembly machines, conveyor systems, material handling


Sensors for welding machine applications	Factor 1 (Fe/Nfe) sensors for ferrous and non ferrous materials			Selective detection sensors for ferrous materials only or non ferrous materials only
Cylindrical, stainless steel 303	Cylindrical	Cubic	Rectangular	Cylindrical




6 or 10 (1)	5, 10 or 15 (1)	20	20	5, 6 or 10 (1)
–	–	–	–	–
Threaded: M12, M18	Threaded: M18, M30	–	–	Threaded: M18
–	–	40 x 40 x 70	40 x 40 x 117	–
Stainless steel 303	Metal	PBT	PBT	Metal
●	●	●	●	●
–	–	–	–	–
–	–	–	–	–
●	–	–	–	●
–	–	–	–	–
–	–	●	●	–
–	●	–	–	–
–	●	–	–	●
–	–	–	–	–
●	●	●	–	–
–	–	–	–	–
–	●	–	–	–
–	–	–	●	–
IP 68 and IP 69K	IP 68	IP 65, IP 67 and IP 69K		IP 68
Add the suffix TF to the end of the reference (3)				
Add the suffix TT to the end of the reference (3)				
XS9●●RW, XS●M, XSLC	XS1M●●●KP	XS9C2	XS9C4	XS1M18PA
114, 116 and 118	120	122	122	126

Standards and certifications

Parameters related to the environment

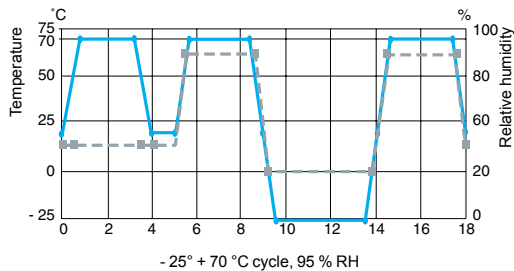

— Temperature °C
- - - Humidity as %

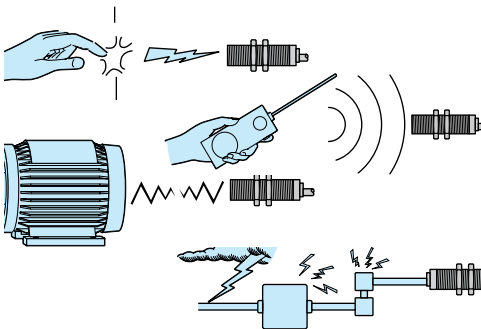

Recommendations

The sensors detailed in this catalogue are designed for use in standard industrial applications relating to presence detection. These sensors do not incorporate the required redundant electrical circuit enabling their usage in safety applications. For safety applications, please refer to our "Safety solutions using Preventa" catalogue.

Quality control

Our inductive proximity sensors are subject to special precautions in order to guarantee their reliability in the most arduous industrial environments.

■ Qualification

- The product characteristics stated in this catalogue are subject to a **qualification procedure** carried out in our laboratories.
- In particular, the products are subjected to **climatic cycle** tests for 3000 hours whilst powered-up to verify their ability to maintain their characteristics over time.

■ Production

- The electrical characteristics and sensing distances at both ambient temperature and extreme temperatures are 100% checked.
- Products are randomly selected during the course of production and subjected to **monitoring tests** relating to all their qualified characteristics.

■ Customer returns

If, in spite of all these precautions, defective products are returned to us, they are subject to **systematic analysis** and **corrective actions** are implemented to eliminate the risks of the fault recurring.

Conformity to standards

All Telemecanique Sensors brand inductive proximity sensors conform to and are tested in accordance with the recommendations of standard IEC 60947-5-2.

Mechanical shock resistance

The sensors are tested in accordance with standard IEC 60068-2-27, 50 gn, duration 11 ms.

Vibration resistance

The sensors are tested in accordance with standard IEC 60068-2-6, amplitude ± 2 mm, $f = 10 \dots 55$ Hz, 25 gn at 55 Hz.

Resistance to the environment

- Please refer to the characteristics pages for the various sensors.
- **IP 67**: protection against the effects of immersion.
Test conforming to IEC 60529: sensor immersed for 30 minutes in 1 m of water. No deterioration in either operating or insulation characteristics is permitted.
- **IP 68**: protection against prolonged immersion.
Sensor immersed for 336 hours in 40 metres of water at 50 °C. No deterioration in either operating or insulation characteristics is permitted. Telemecanique Sensors with an IP 68 degree of protection are ideal for use in the most arduous conditions, such as machine tools, automatic car washers.
- **IP 69K**: protection against the effects of high pressure cleaning. Adherence to standard DIN 40050 which stipulates that the product must withstand a water jet at a pressure of 90 bar and temperature of +80 °C for 3 minutes. No deterioration in either operating or insulation characteristics is permitted.

Resistance to electromagnetic interference

- Electrostatic discharges
~ and ~ versions: level 4 immunity (15 kV).
IEC 61000-4-2
- Radiated electromagnetic fields (electromagnetic waves)
~, ~ and ~ versions: level 2 (3 V/m) or level 3 (10 V/m) immunity. **IEC 61000-4-3**
- Fast transients (motor start/stop interference)
~ version: level 3 immunity (1 kV).
~ and ~ versions: level 4 immunity (2 kV) except Ø 8 mm model (level 2). **IEC 61000-4-4**
- Impulse voltage
~, ~ and ~ versions: level 3 immunity (2.5 kV) except Ø 8 mm and smaller models (level 1 kV).
IEC 60947-5-2

Resistance to chemicals in the environment

- Owing to the very wide range of chemicals encountered in industry, it is very difficult to give general guidelines common to all sensors.
- To ensure lasting efficient operation, it is essential that any chemicals coming into contact with the sensors will not affect their casing and, in doing so, prevent their reliable operation.
- Cylindrical and flat plastic case sensors offer excellent overall resistance to:
 - chemical products such as salts, aliphatic and aromatic oils, petroleum, acids and diluted bases. For alcohols, ketones and phenols, preliminary tests should be made relating to the nature and concentration of the liquid.
 - food and beverage industry products such as animal or vegetable based products (vegetable oils, animal fat, fruit juice, dairy proteins, etc.).


In all cases, the materials selected (see product characteristics) provide satisfactory compatibility in most industrial environments (for further information, please consult our Customer Information Centre).

Insulation


Class 2 devices

Electrical insulation conforming to standards IEC 61140 and NF C 20-030 relating to means of protection against electric shock.

Principle of inductive detection

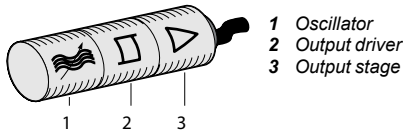

Composition of an inductive proximity sensor

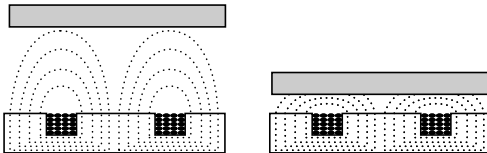

Detection of a metal object

Operating principle

■ An inductive proximity sensor is solely for the detection of metal objects. It basically comprises an oscillator whose windings constitute the sensing face. An alternating magnetic field is generated in front of these windings.

- When a metal object is placed within the magnetic field generated by the sensor, the resulting currents induced form an additional load and the oscillations cease. This causes the output driver to operate and, depending on the sensor type, a normally open (NO) or normally closed (NC) output signal is produced.

Inductive proximity detection

- Inductive proximity sensors enable the detection, without physical contact, of metal objects.
- Their range of applications is very extensive and includes:
 - monitoring the position of machine parts (cams, end stops, etc.),
 - counting the presence of metal objects, etc.

Advantages of inductive detection

- No physical contact with the object to be detected, thus avoiding wear and enabling detection of fragile objects, freshly painted objects, etc.
- High operating rates. Fast response.
- Excellent resistance to industrial environments (robust products, fully encapsulated in resin).
- Solid-state technology: no moving parts, therefore service life of sensor not related to number of operating cycles.


Flush mountable using teach mode sensors

- The flush mountable sensors using teach mode are suitable for all metal environments (flush mountable or non flush mountable) since they ensure a maximum sensing distance, even if there is a metal background. Precise detection of the position of the object can be obtained using the teach mode. For further information, see page 22.

LED indicator

	Sortie NO	Sortie NC
No object present	LED 	LED 
Output state		
Object present	LED 	LED 
Output state		

Mounting sensors on a metal support

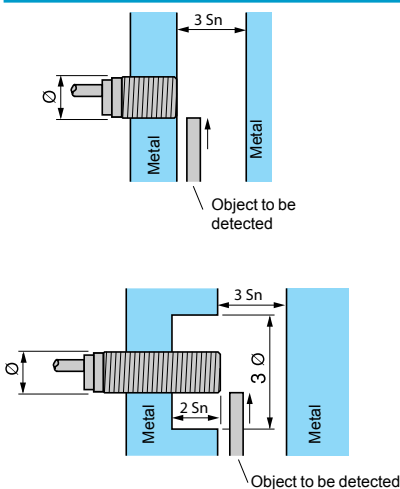

Output LED

All Telemecanique Sensors inductive proximity sensors incorporate an output state LED indicator.

The flush mountable sensors using teach mode are fitted with a green LED that indicates "Power on" and also assists the user during setting-up (teach mode).


Flush mountable in metal

- No side clearance required.
- All flush mountable sensors using teach mode also enable detection of an object against a metal background. For further information, see pages 22 and 23.


Sensors not suitable for flush mounting in metal

- Side clearance required. Sensing distance greater than that for a standard flush mountable model.
- Flush mountable sensors using teach mode eliminate the need for side clearance. For further information, see pages 22 and 23.


Mounting sensors on a metal support

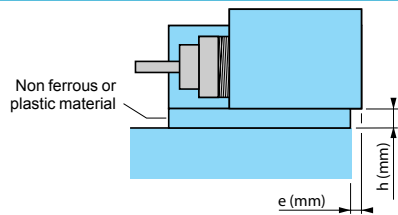

Mounting distance between sensors

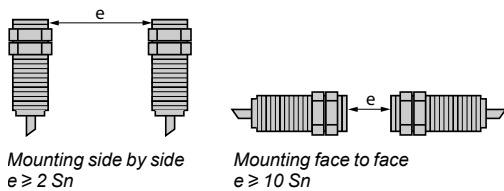

Tightening torque for cylindrical type sensors

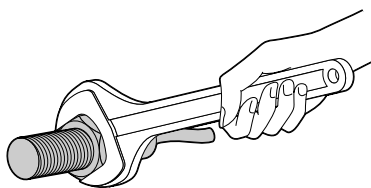

Mounting using fixing clamp

- Standard flush mountable models: $e = 0$, $h = 0$
- Standard non flush mountable models
 - $\varnothing 6.5 / 8 / 12$ mm: $e = 0$, $h = 0$
 - $\varnothing 18$ mm: if $h = 0$, $e \geq 5$; $e = 0$, $h \geq 3$.
 - $\varnothing 30$ mm: if $h = 0$, $e \geq 8$; $e = 0$, $h \geq 4$.
- Flush mountable sensors using teach mode: $e = 0$, $h = 0$

Standard sensors


If 2 standard sensors are mounted too close to each other they are likely to lock in the "detection state" due to interference between their respective oscillating frequencies. To avoid this condition, the minimum mounting distances stated for the sensors should be adhered to or, alternatively, sensors with staggered oscillating frequencies should be used.

Staggered frequency sensors


For applications where the minimum recommended mounting distances for standard sensors cannot be achieved, it is possible to overcome this restraint by using staggered frequency sensors. Please consult our Customer Care Centre. In this case, a staggered frequency sensor is mounted adjacent to or opposite each standard sensor.

Diameter of sensor (mm)	Maximum tightening torque for the various sensor case materials			
	Brass	Brass	Stainless steel	Plastic
	Short case model	Long case model form A	Long case model form A	All models
	XS5●●B1 XS6●●B3	XS6●●B1 XS6●●B2 XS6●●B4 XSAV●	XS1●● XS2●●	XS4P●●
Ø 5	1.6 N.m	1.6 N.m	2 N.m	–
Ø 8	5 N.m	5 N.m	9 N.m	1 N.m
Ø 12	6 N.m	6 N.m	30 N.m	2 N.m
Ø 18	15 N.m	15 N.m	50 N.m	5 N.m
Ø 30	40 N.m	40 N.m	100 N.m	20 N.m



Sensing distance

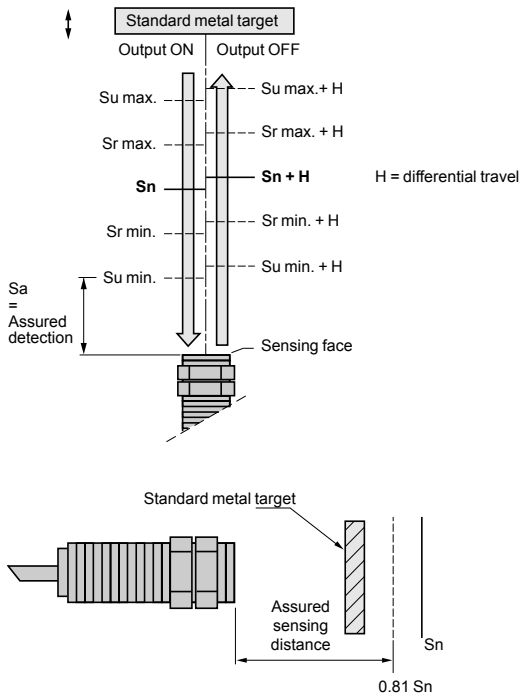

Terminology

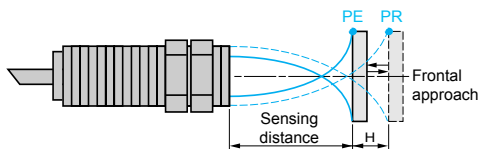

PE = pick-up point, the object is detected
PR = drop-out point, the object is no longer detected

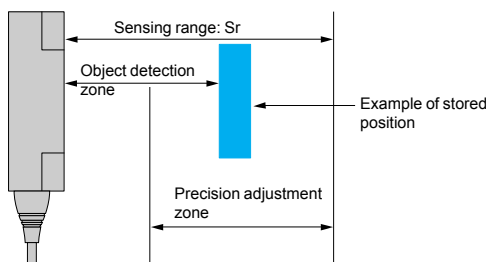

1 Detection threshold curves
2 "Object detected" LED

Definitions

In order to ensure that customers can make reliable product comparisons and selection, the standard IEC 60947-5-2 defines various sensing distances, such as:

■ Nominal sensing distance (Sn)

The rated operating distance for which the sensor is designed. It does not take into account any variations (manufacturing tolerances, temperature, voltage).

■ Effective sensing distance (Sr)

The effective sensing distance is measured at the rated voltage (U_n) and the rated ambient temperature (T_n).

It must be between 90% and 110% of the nominal sensing distance (S_n):

$$0.9 S_n \leq S_r \leq 1.1 S_n$$

■ Usable sensing distance (Su)

The usable sensing distance is measured at the limits of the permissible variations in the ambient temperature (T_a) and the supply voltage (U_b). It must be between 90% and 110% of the effective sensing distance: $0.9 S_r \leq S_u \leq 1.1 S_r$.

■ Assured operating distance (Sa)

This is the operating zone of the sensor. The assured sensing distance is between 0 and 81% of the nominal sensing distance (S_n): $0 \leq S_a \leq 0.9 \times 0.9 \times S_n$.

Standard metal target

The standard IEC 60947-5-2 defines the standard metal target as a square mild steel (Fe 360) plate, 1 mm thick.

The side dimension of the plate is either equal to the diameter of the circle engraved on the sensing face of the sensor or 3 times the nominal sensing distance (S_n).

Differential travel

The differential travel (H), or hysteresis, is the distance between the operating point, as the standard metal target moves towards the sensor, and the release point, as it moves away. This hysteresis is essential for the stable operation of the sensor.

Repeat accuracy

The repeat accuracy (R) is the repeatability of the sensing distance between successive operations. Readings are taken over a period of time whilst the sensor is subjected to voltage and temperature variations: 8 hours, 10 to 30 °C, $U_n \pm 5\%$.

It is expressed as a percentage of the effective sensing distance S_r .

For all OsiSense XS sensors, the repeat accuracy is 3 %.

Detection zone and precision adjustment zone

■ Flush mountable sensors using teach mode, due to adjustment of sensitivity whilst teaching, enable the position of an object to be detected as it approaches from the front or side.

The teach mode can be used when the object is located in the zone known as the "precision adjustment zone". When the object approaches from the front, the detection zone of the object ranges from the stored position down to zero.




Operating zone

■ The operating zone relates to the area in front of the sensing face in which the detection of a metal object is certain.


The values stated in the characteristics relating to the various types of sensor are for steel objects of a size equal to the sensing face of the sensor.

For objects of a different nature (smaller than the sensing face of the sensor, other metals, etc.), it is necessary to apply a correction coefficient.

Correction coefficients to apply to the assured operating distance

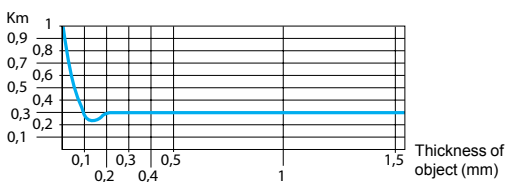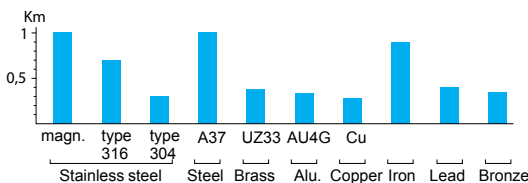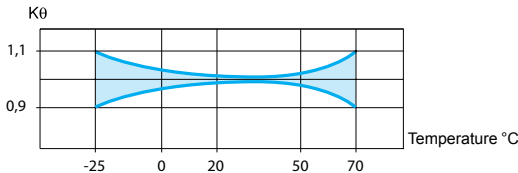

Typical curve for a **copper** object used with a Ø 18 mm cylindrical sensor

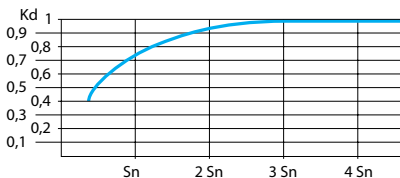

Typical curve for a **steel** object used with a cylindrical sensor

Assured operating distance of a sensor

In practice, most objects to be detected are generally made of steel and are of a size equal to, or greater, than the sensing face of the sensor.

For the calculation of the assured operating distance for different operating conditions, one must take into account the correction coefficients that influence it.

The curves indicated are purely representative of typical curves. They are only given as a guide to the approximate usable sensing distance of a proximity sensor for a given application.

Influence of ambient temperature

Apply a correction coefficient K_θ , determined from the curve shown opposite.

Material of object to be detected

Apply a correction coefficient K_m , determined from the diagram shown opposite.

The fixed sensing distance models for ferrous/non ferrous (Fe/NFe) materials enable the detection of different objects at a fixed distance, irrespective of the type of material.

Special case of a very thin object made of a non ferrous material.

Size of object to be detected

Apply a correction coefficient K_d , determined from the curve shown opposite. When calculating the sensing distance for the selection of a sensor, make the assumption that $K_d = 1$.

Variation of supply voltage

In all cases, apply the correction coefficient $K_t = 0.9$.

Calculation examples

Correction of the sensing distance of a sensor

Sensor with nominal sensing distance $S_n = 15$ mm.

Ambient temperature variation 0 to + 20 °C.

Object material and size: steel, 30 x 30 x 1 mm thick.

The assured sensing distance S_a is determined using the formula:

$$S_a = S_n \times K_\theta \times K_m \times K_d \times K_t = 15 \times 0.98 \times 1 \times 0.95 \times 0.9$$

i.e. $S_a = 12.5$ mm.

Selecting a sensor for a given application



Application characteristics:

- object material and size: iron ($K_m = 0.9$), 30 x 30 mm,
- temperature: 0 to 20 °C ($K_\theta = 0.98$),
- object detection distance: 3 mm $\pm$ 1.5 mm, i.e. S_a max. = 4.5 mm,
- assume $K_d = 1$.

$$A \text{ sensor must be selected for which } S_n \geq \frac{S_a}{K_\theta \times K_m \times K_d \times K_t} = \frac{4.5}{0.98 \times 0.9 \times 1 \times 0.9}$$

$$\text{i.e. } S_n \geq 5.7 \text{ mm}$$

Specific aspects of electronic sensors

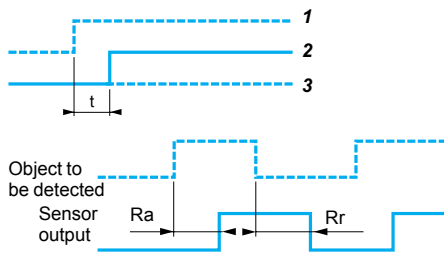

Supply

Terminology

- Residual current (I_r)
 - The residual current (I_r) corresponds to the current flowing through the sensor when in the "open" state.
 - Characteristic of 2-wire type proximity sensors.
 - Voltage drop (U_d)
 - The voltage drop (U_d) corresponds to the voltage drop at the sensor's terminals when in the "closed" state (value measured at nominal current rating of sensor).
 - First-up delay
 - The first-up delay corresponds to the time (t) between the connection of the power supply to the sensor and its fully operational state.
- 1 Supply voltage U on
 2 Sensor operational at state 1
 3 Sensor at state 0
- Response time
 - Response time (R_a): the time delay between the object to be detected entering the sensor's operating zone and the subsequent change of output state. This parameter limits the speed and size of the object.
 - Recovery time (R_r): the time delay between an object to be detected leaving the sensor's operating zone and the subsequent change of output state. This parameter limits the interval between successive objects.

Sensors for AC circuits ($\sim$ and $\sphericalangle$ models)

Check that the voltage limits of the sensor are compatible with the nominal voltage of the AC supply used.

Sensors for DC circuits

- DC source: check that the voltage limits of the sensor and the acceptable level of ripple are compatible with the supply used.
- AC source (comprising transformer, rectifier, smoothing capacitor): the supply voltage must be within the operating limits specified for the sensor.

Where the voltage is derived from a single-phase AC supply, the voltage must be rectified and smoothed to ensure that:

- the peak voltage of the DC supply is lower than the maximum voltage rating of the sensor.

Peak voltage = nominal voltage $\times \sqrt{2}$

- the minimum voltage of the supply is greater than the minimum voltage rating of the sensor, given that:

$$\Delta V = (I \times t) / C$$

$$\Delta V = \text{max. ripple: } 10\% (V),$$

$$I = \text{anticipated load current (mA),}$$

$$t = \text{period of 1 cycle (10 ms full-wave rectified for a 50 Hz supply frequency),}$$

$$C = \text{capacitance (}\mu\text{F).}$$


As a general rule, use a transformer with a lower secondary voltage (U_e) than the required DC voltage (U).

Example:

$\sim 18\text{ V}$ to obtain $\text{---} 24\text{ V}$,

$\sim 36\text{ V}$ to obtain $\text{---} 48\text{ V}$.


Outputs



Output signal (contact logic)

- Normally open (NO)
Corresponds to a sensor whose output changes to the closed state when an object is present in the operating zone.
- Normally closed (NC)
Corresponds to a sensor whose output changes to the open state when an object is present in the operating zone.
- Complementary outputs (NO + NC)
Corresponds to a sensor with a normally closed output and a normally open output.

Outputs (continued)



2-wire type, non polarised NO or NC output

■ Specific aspects

These sensors are wired in series with the load to be switched.

As a consequence, they are subject to:


- a residual current in the open state (current flowing through the sensor in the "open" state),
- A voltage drop in the closed state (voltage drop across the sensor's terminals in the "closed" state).

■ Advantages

- Only 2 leads to be wired: these sensors can be wired in series in the same way as mechanical limit switches,
- They can be connected to either positive (PNP) or negative (NPN) logic PLC inputs,
- No risk of incorrect connections.

■ Operating precautions

- Check the possible effects of residual current and voltage drop on the actuator or input connected,
- For sensors that do not have overload and short-circuit protection (AC or AC/DC symbol), it is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

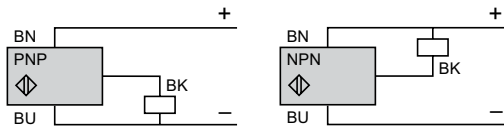


3-wire type, NO or NC output, PNP or NPN

■ Specific aspects

- These sensors comprise 2 wires for the DC supply and a 3rd wire for the output signal,
- PNP type: switching the positive side to the load,
- NPN type: switching the negative side to the load.

■ Advantages


- Protection against supply reverse polarity,
- Protection against overload and short-circuit,
- No residual current, low voltage drop.

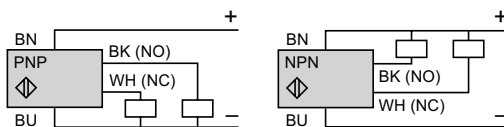

4-wire type, complementary NO and NC outputs, PNP or NPN

■ Advantages


- Protection against supply reverse polarity (+/-).
- Protection against overload and short-circuit.

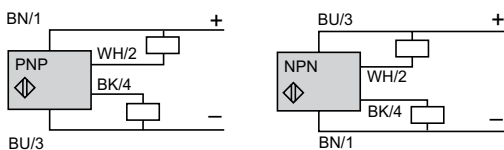

4-wire type, multifunction, programmable NO or NC output, PNP or NPN

■ Advantages

- Protection against supply reverse polarity (+/-).
- Protection against overload and short-circuit.

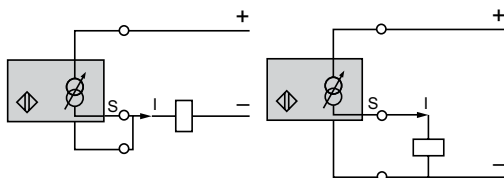

2-wire connection

3-wire connection


Specific output signals, analogue type

- These sensors convert the approach of a metal object towards the sensing face into an output current variation which is proportional to the distance between the object and the sensing face.

■ Two models available:

- 0...10 V (0...10 mA) output for 3-wire connection,
- 4-20 mA output for 2-wire connection.

Features of the various models

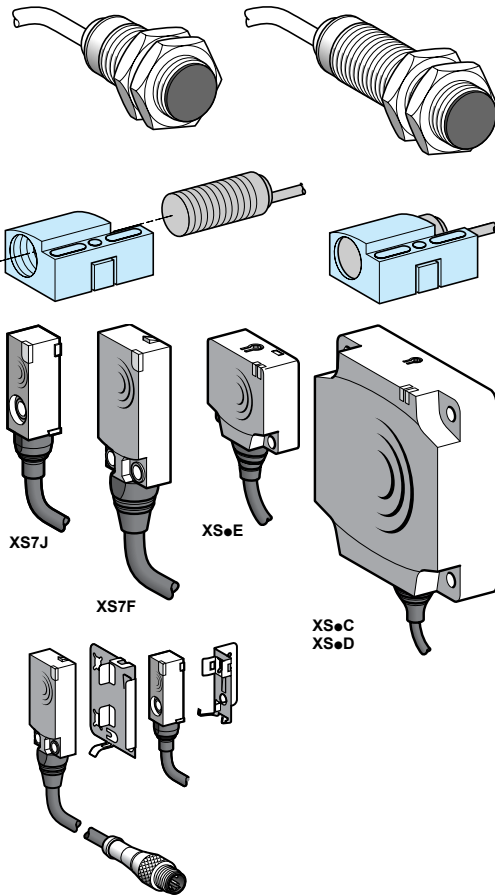

Types of case


■ Cylindrical case

- Fast installation and setting-up.
- Short case and long case, 2-wire and 3-wire versions available.
- Pre-cabled (moulded cable) and various integral connector (M8, M12, 7/8", M18) and remote connector (on flying lead) versions available.
- Small size facilitates mounting in locations with restricted access.
- **Interchangeability**, provided by indexed **fixing clamp**: when assembled, becomes similar to a block type sensor.

■ Flat case

- Reduced size (sensor volume divided by 8).
- Fast installation by mounting on clip-on brackets.
- Precision detection with the flush mountable sensors using teach mode (see page 22).

Electrical connection

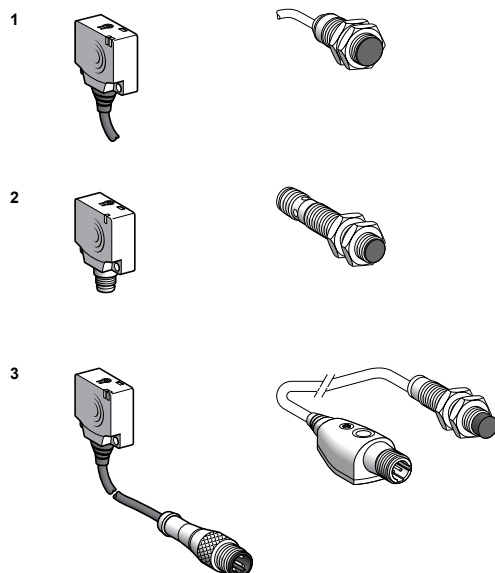

Connection methods

- 1 Pre-cabled:** factory fitted moulded cable, good protection against splashing liquids (IP 68). Example: machine tool.
- 2 Connector:** easy installation and maintenance (IP 67).
- 3 Remote connector:** easy installation and maintenance (IP 68 at sensor level and IP 67 at remote connector level).

Wiring advice

■ Length of cable











- No limitation up to 200 m or up to a line capacitance of < 100 nF (characteristics of sensor remain unaffected).
- In this case, it is important to take into account the voltage drop on the line.

■ Separation of control and power circuit wiring

- The sensors are immune to electrical interference encountered in normal industrial conditions.
- Where extreme conditions of electrical "noise" could occur (large motors, spot welders, etc.), it is advisable to protect against transients in the normal way:
 - suppress interference at source,
 - separate power and control wiring from each other,
 - smooth the supply,
 - limit the length of cable.

■ Connect the sensor with supply switched off.

Setting-up precautions



Connection in series

2-wire type sensors

- The following points should be taken into account:
 - Series wiring is only possible using sensors with wide voltage limits.
- Based on the assumption that each sensor has the same residual current value, each sensor, in the open state, will share the supply voltage, i.e.

$$U_{\text{sensor}} = \frac{U_{\text{supply}}}{n_{\text{sensors}}}$$

U_{sensor} and U_{supply} must remain within the sensor's voltage limits.

- If only one sensor in the circuit is in the open state, it will be supplied at a voltage almost equal to the supply voltage.
- When in the closed state, a small voltage drop is present across each sensor. The resultant loss of voltage at the load will be the sum of the individual voltage drops and therefore, the load voltage should be selected accordingly.

3-wire type sensors

This connection method is not recommended.

- Correct operation of the sensors cannot be assured and, if this method is used, tests should be made before installation.
- The following points should be taken into account:
 - Sensor 1 carries the load current in addition to the no-load current consumption values of the other sensors connected in series. For certain models, this connection method is not possible unless a current limiting resistor is used.
 - When in the closed state, a small voltage drop is present across each sensor. The load should therefore be selected accordingly.
 - As sensor 1 closes, sensor 2 does not operate until a certain time (t) has elapsed (corresponding to the first-up delay) and likewise for the following sensors in the sequence.
 - The use of "flywheel" diodes is recommended when an inductive load is being switched.

Sensors and devices in series with an external mechanical contact

2 and 3-wire type sensors

- The following points should be taken into account:
 - When the mechanical contact is open, the sensor is not supplied.
 - When the contact closes, the sensor does not operate until a certain time (t) has elapsed (corresponding to the first-up delay).

Connection in parallel

2-wire type sensors

This connection method is not recommended.

- Should one of the sensors be in the closed state, the sensor in parallel will be "shorted-out" and no longer supplied.
- As the first sensor passes into the open state, the second sensor will become energised and will be subject to its first-up delay.
- This configuration is only permissible where the sensors will be working alternately.
- This method of connection can lead to irreversible damage of the units.

3-wire type sensors

- No specific restrictions. The use of "flywheel" diodes is recommended when an inductive load (relay) is being switched.

AC supply

■ **2-wire type sensors cannot be connected directly to an AC supply.**

- This would result in immediate destruction of the sensor and considerable danger to the user.
- An appropriate load (refer to the instruction sheet supplied with the sensor) must always be connected in series with the sensor.

Capacitive load ($C > 0.1 \mu\text{F}$)

- On power-up, it is necessary to limit (by resistor) the charging current of the capacitive load C.
- The voltage drop in the sensor can also be taken into account by subtracting it from the supply voltage for the calculation of R.

$$R = \frac{U_{\text{supply}}}{I_{\text{max. (sensor)}}$$

Load comprising an incandescent lamp

- If the load comprises an incandescent lamp, the cold state resistance can be 10 times lower than the hot state resistance. This can cause very high current levels on switching. Fit a pre-heat resistor in parallel with the sensor.

$$R = \frac{U^2}{P} \times 10, U = \text{supply voltage and } P = \text{lamp power}$$


Fast trouble shooting guide

Problem	Possible causes	Remedy
The sensor's output will not change state when a metal object enters the detection zone	On a flush mountable sensor using teach mode: setting-up or programming error.	■ After a RESET, follow the environment teach mode procedure. Refer to instruction sheet supplied with sensor.
	Output stage faulty or complete failure of the sensor or the short-circuit protection has tripped.	■ Check that the sensor is compatible with the supply being used. ■ Check the load current characteristics: □ if load current $I \geq$ maximum switching capacity, an auxiliary relay, of the CAD N type for example, should be interposed between the sensor and the load, □ if $I \leq$ maximum switching capacity, check for wiring faults (short-circuit). ■ In all cases, a 0.4 A "quick-blow" fuse should be fitted in series with the sensor.
	Wiring error	■ Check that the wiring conforms to the wiring shown on the sensor label or instruction sheet.
	Supply fault	■ Check that the sensor is compatible with the supply ($\sim$ or ---). ■ Check that the supply voltage is within the voltage limits of the sensor. Remember that with a rectified, smoothed supply, $U_{\text{peak}} = U_{\text{nominal}} \times \sqrt{2}$ with a ripple voltage $\leq 10\%$.
False or erratic operation, with or without the presence of a metal object in the detection zone	On flush mountable sensor using teach mode: setting-up or programming error.	■ After a RESET, follow the environment teach mode procedure. Refer to instruction sheet supplied with sensor.
	Influence of background or metal environment	■ Refer to the instruction sheet supplied with the sensor. For sensors with adjustable sensitivity, reduce the sensing distance.
	Sensing distance poorly defined for the object to be detected	■ Apply the correction coefficients. ■ Realign the system or run the teach mode again.
	Influence of transient interference on the supply lines	■ Ensure that any DC supplies, when derived from rectified AC, are correctly smoothed ($C > 400 \mu\text{F}$). ■ Separate AC power cables from low-level DC cables (24 V low level). ■ Where very long distances are involved, use suitable cable: screened and twisted pairs of the correct cross-sectional area.
	Equipment prone to emitting electromagnetic interference	■ Position the sensors as far away as possible from any sources of interference.
	Response time of the sensor too slow for the particular object being detected	■ Check the suitability of the sensor for the position or size of the object to be detected. ■ If necessary, select a sensor with a higher switching frequency.
	Influence of high temperature	■ Eliminate sources of radiated heat or protect the sensor casing with a heat shield. ■ Realign, having adjusted the temperature around the fixing support.
No detection following a period of service	Vibration, shock	■ Realign the system. ■ Replace the support or protect the sensor.

Inductive proximity sensors

OsiSense XS

Flush mountability using teach mode: simplicity through innovation

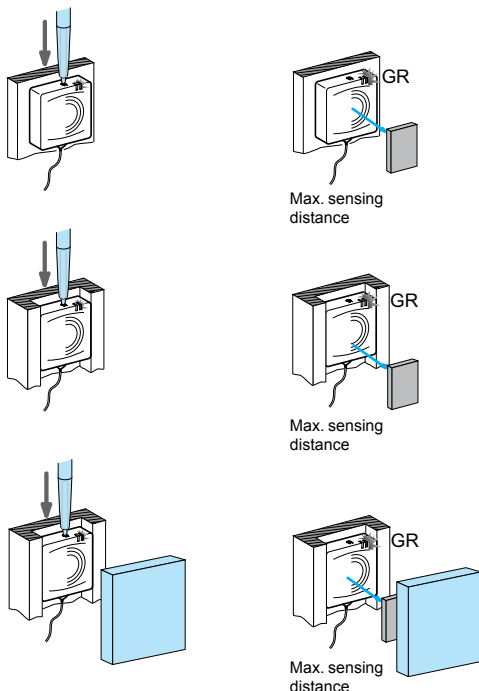

Operating principle

In proposing flush mountable sensors using teach mode, Telemecanique Sensors offers simplicity through innovation.

■ A single product enables flush mounting using teach mode and meets all the requirements for inductive detection of metal objects.

By simply pressing the "Teach mode" button, the sensor automatically acquires optimum configuration for all detection, flush mountability and environment requirements.

■ Other advantages of flush mountable sensors using teach mode

□ Increased performance:

- sensing distance guaranteed and optimised irrespective of the mounting method, object, environment or background,
- suitable for all metal environments.

□ Simplified use provided by:

- the flush mountability using teach mode technology, associated with the availability of the flattest and most compact sensors on the market, ensures full integration in the machine and limits the risks of mechanical damage,
- mechanical adjustments no longer necessary due to teach mode.

□ Lower costs due to:

- the elimination of adjustment times and complex supports
- the elimination of flush mountable and non flush mountable versions, which halves the number of references,
- much easier and much quicker product selection.

Precision position detection


All flush mountable inductive proximity sensors using teach mode benefit from ultra precise adjustment, which is very quick irrespective of the metal environment.

■ Precision side approach detection makes it possible to accurately define the distance at which the object will be detected as it passes the sensor.

On the flush mountable sensors using teach mode, the desired detection position can be stored in memory by simply pressing the teach button.

■ Precision frontal approach detection makes it possible to accurately define the distance at which the object will be detected as it approaches the sensor.

On the flush mountable sensors using teach mode, the desired detection position can be stored in memory by simply pressing the teach button.


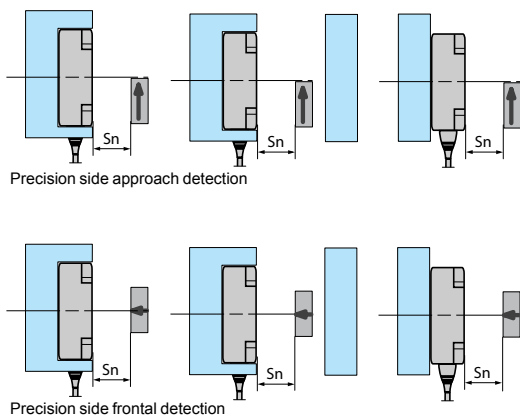


Mounting accessories

Telemecanique Sensors offers a complete, inexpensive range of mounting accessories (clamps, plates, brackets, etc.) that provide solutions for all installation problems.

■ Fixing kits for quick installation or replacement of sensors

■ No adjustment required. Simple clipping-in enables the sensor to be fixed in position and ready for operation.



Inductive proximity sensors

OsiSense XS

Flush mountability using teach mode:
simplicity through innovation



Block type

Dimensions (mm)	26 x 26 x 13	40 x 40 x 15	80 x 80 x 26
Sensing distance (mm)	Flush mounted use	0...10	0...15
	Non flush mounted use	0...15	0...25
Sensor type	XS8E1A1	XS8C1A1	XS8D1A1
Page	80		



Cylindrical type


Dimensions (mm)	12	18	30
Sensing distance (mm)	Flush mounted use	0...3.4	0...6
	Non flush mounted use	0...5	0...9
Sensor type	XS612B2	XS618B2	XS630B2
Page	78		

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Three-wire DC, solid-state output




XS506B1●●L2




XS508B1●●L2




XS512B1●●M12




XS518B1●●M12



XS518B1●●L2



XS530B1●●L2



XSZB1●●

Sensors, 3-wire 12-24 V, short case model

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 6.5, plain					
1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS506B1PAL2	0.035
			M8 connector	XS506B1PAM8	0.025
			M12 connector	XS506B1PAM12	0.025
		NPN	Pre-cabled (L = 2 m) (1)	XS506B1NAL2	0.035
			M8 connector	XS506B1NAM8	0.025
			NC	PNP	Pre-cabled (L = 2 m) (1)
	M8 connector	XS506B1PBM8			0.025
	NPN	Pre-cabled (L = 2 m) (1)		XS506B1NBL2	0.035
		M8 connector	XS506B1NBM8	0.025	
Ø 8, threaded M8 x 1					
1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS508B1PAL2	0.035
			M8 connector	XS508B1PAM8	0.025
			M12 connector	XS508B1PAM12	0.025
		NPN	Pre-cabled (L = 2 m) (1)	XS508B1NAL2	0.035
			M8 connector	XS508B1NAM8	0.025
			M12 connector	XS508B1NAM12	0.025
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS508B1PBL2	0.035
			M8 connector	XS508B1PBM8	0.025
			M12 connector	XS508B1PBM12	0.025
		NPN	Pre-cabled (L = 2 m) (1)	XS508B1NBL2	0.035
			M8 connector	XS508B1NBM8	0.025
			M12 connector	XS508B1NBM12	0.025
Ø 12, threaded M12 x 1					
2	NO	PNP	Pre-cabled (L = 2 m) (1)	XS512B1PAL2	0.075
			M12 connector	XS512B1PAM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS512B1NAL2	0.075
			M12 connector	XS512B1NAM12	0.035
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS512B1PBL2	0.075
			M12 connector	XS512B1PBM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS512B1NBL2	0.075
			M12 connector	XS512B1NBM12	0.035
Ø 18, threaded M18 x 1					
5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS518B1PAL2	0.120
			M12 connector	XS518B1PAM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	XS518B1NAL2	0.120
			M12 connector	XS518B1NAM12	0.060
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS518B1PBL2	0.120
			M12 connector	XS518B1PBM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	XS518B1NBL2	0.120
			M12 connector	XS518B1NBM12	0.060
Ø 30, threaded M30 x 1.5					
10	NO	PNP	Pre-cabled (L = 2 m) (1)	XS530B1PAL2	0.205
			M12 connector	XS530B1PAM12	0.145
		NPN	Pre-cabled (L = 2 m) (1)	XS530B1NAL2	0.205
			M12 connector	XS530B1NAM12	0.145
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS530B1PBL2	0.205
			M12 connector	XS530B1PBM12	0.145
		NPN	Pre-cabled (L = 2 m) (1)	XS530B1NBL2	0.205
			M12 connector	XS530B1NBM12	0.145

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS508B1PAL2 becomes XS508B1PAL5 with a 5 m long cable.


(2) For further information, see page 128.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Three-wire DC, solid-state output




XS506BL●●L2



XS5●●BL●●L2



XS5●●BL●●M12



XS530BL●●L2

Sensors, 3-wire $\overline{\text{DC}}$ 12-48 V, long case model

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 6.5, plain					
1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS506BLPAL2	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS506BLNAL2	0.035

Ø 8, threaded M8 x 1

1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS508BLPAL2	0.035
			M12 connector	XS508BLPAM12	0.025
		NPN	Pre-cabled (L = 2 m) (1)	XS508BLNAL2	0.035
			M12 connector	XS508BLNAM12	0.025
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS508BLPBL2	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS508BLNBL2	0.035
			M12 connector	XS508BLNBM12	0.025

Ø 12, threaded M12 x 1

2	NO	PNP	Pre-cabled (L = 2 m) (1)	XS512BLPAL2	0.075
			M12 connector	XS512BLPAM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS512BLNAL2	0.075
			M12 connector	XS512BLNAM12	0.035
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS512BLPBL2	0.075
		NPN	Pre-cabled (L = 2 m) (1)	XS512BLNBL2	0.075
			M12 connector	XS512BLNBM12	0.035

Ø 18, threaded M18 x 1

5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS518BLPAL2	0.120
			M12 connector	XS518BLPAM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	XS518BLNAL2	0.120
			M12 connector	XS518BLNAM12	0.060
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS518BLPBL2	0.120
		NPN	Pre-cabled (L = 2 m) (1)	XS518BLNBL2	0.120
			M12 connector	XS518BLNBM12	0.060

Ø 30, threaded M30 x 1.5

10	NO	PNP	Pre-cabled (L = 2 m) (1)	XS530BLPAL2	0.205
			M12 connector	XS530BLPAM12	0.145
		NPN	Pre-cabled (L = 2 m) (1)	XS530BLNAL2	0.205
			M12 connector	XS530BLNAM12	0.145
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS530BLPBL2	0.205
		NPN	Pre-cabled (L = 2 m) (1)	XS530BLNBL2	0.205
			M12 connector	XS530BLNBM12	0.145

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: **XS508BLPAL2** becomes **XS508BLPAL5** with a 5 m long cable.

(2) For further information, see page 128.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, standard range, flush mountable

Three-wire DC, solid-state output

Characteristics				
Sensor type		XS5●●B1●●M8, XS5●●B1●●M12 XS5●●BL●●M8, XS5●●BL●●M12		XS5●●B1●●L2 XS5●●BL●●L2
Product certifications		UL, CSA, C€		
Connection	Connector	M8 on Ø 6.5 and Ø 8, M12 on Ø 8, Ø 12, Ø 18 and Ø 30		–
	Pre-cabled	–		Length: 2 m
Operating zone	Ø 6.5 and Ø 8	mm	0...1.2	
	Ø 12	mm	0...1.6	
	Ø 18	mm	0...4	
	Ø 30	mm	0...8	
Differential travel		%	1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 65 and IP 67		IP 65 and IP 68, double insulation □ (except Ø 6.5 and Ø 8: IP 67)
	Conforming to DIN 40050	IP 69K for Ø 12 to Ø 30		
Storage temperature		°C	- 40... + 85	
Operating temperature		°C	- 25... + 70	
Materials	Case	Nickel plated brass (except XS506 and XS508BL: stainless steel, grade 303)		
	Sensing face	PPS		
	Cable	–		PvR 3 x 0.34 mm² except XS506 and XS508 : 3 x 0.11 mm²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 50 Hz)		
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms		
Output state indication		Yellow LED: 4 viewing ports at 90°		Yellow LED: annular
Rated supply voltage		V	⎓ 12...48 for XS5●●BL, ⎓ 12...24 for XS5●●B1 with protection against reverse polarity	
Voltage limits (including ripple)		V	⎓ 10...58 for XS5●●BL, ⎓ 10...36 for XS5●●B1	
Switching capacity		mA	≤ 200 with overload and short-circuit protection	
Voltage drop, closed state		V	≤ 2	
Current consumption, no-load		mA	≤ 10	
Maximum switching frequency	XS506, XS508, XS512	Hz	5000	
	XS518	Hz	2000	
	XS530	Hz	1000	
Delays	First-up	ms	≤ 10	
	Response	ms	≤ 0.1: XS506 , XS508 and XS512 ≤ 0.15: XS518 ≤ 0.3: XS530	
	Recovery	ms	≤ 0.1: XS506 , XS508 and XS512 ≤ 0.35: XS518 ≤ 0.7: XS530	

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, standard range, flush mountable

Three-wire DC, solid-state output

Wiring schemes

Connector	Pre-cabled	PNP	NPN
M8 M12	BU: Blue BN: Brown BK: Black		


For M8 connector, NO and NC outputs on terminal 4

Setting-up

Minimum mounting distances (mm)

Flush mountable sensors	Side by side	Face to face	Facing a metal object
Ø 6.5	$e \geq 3$	$e \geq 18$	$e \geq 4.5$
Ø 8	$e \geq 3$	$e \geq 18$	$e \geq 4.5$
Ø 12	$e \geq 4$	$e \geq 24$	$e \geq 6$
Ø 18	$e \geq 10$	$e \geq 60$	$e \geq 15$
Ø 30	$e \geq 20$	$e \geq 120$	$e \geq 30$

Dimensions



(1) LED


Sensors		Pre-cabled (mm)		M8 connector (mm)		M12 connector (mm)	
Short case model		a	b	a	b	a	b
Ø 6.5	XS506B1	33	—	42	—	45	—
Ø 8	XS508B1	33	25	42	26	45	24
Ø 12	XS512B1	35	25	—	—	50	30
Ø 18	XS518B1	39	28	—	—	50	28
Ø 30	XS530B1	43	32	—	—	55	32
Sensors		Pre-cabled (mm)		M12 connector (mm)			
Long case model		a	b	a	b		
Ø 6.5	XS506BL	51	—	—	—		
Ø 8	XS508BL	51	42	62	40		
Ø 12	XS512BL	53	42	62	42		
Ø 18	XS518BL	62	52	74	52		
Ø 30	XS530BL	62	52	74	52		

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Two-wire DC




XS506BS●●L2



XS512BS●●L2



XS5●●BS●●M12



XSZB1●●

Sensors, 2-wire ~ 12-24 V, short case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 6.5, plain				
1.5	NO	Pre-cabled (L = 2 m) (1)	XS506BSCAL2	0.035
		Remote M12 connector	XS506BSCAL01M12	0.050
	NC	Pre-cabled (L = 2 m) (1)	XS506BSCBL2	0.035
Ø 8, threaded M8 x 1				
1.5	NO	Pre-cabled (L = 2 m) (1)	XS508BSCAL2	0.035
		Remote M12 connector	XS508BSCAL01M12	0.050
		Remote M12 connector	XS508BSCAL08M12	0.050
	NC	Pre-cabled (L = 2 m) (1)	XS508BSCBL2	0.035
		Remote M12 connector	XS508BSCBL01M12	0.050
Ø 12, threaded M12 x 1				
2	NO	Pre-cabled (L = 2 m) (1)	XS512BSDAL2	0.075
		M12 connector	XS512BSDAM12	0.035
	NO	M12 connector	XS512BSCAM12	0.035
		Remote M12 connector	XS512BSCAL08M12	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS512BSDBL2	0.075
		M12 connector	XS512BSDBM12	0.035
Ø 18, threaded M18 x 1				
5	NO	Pre-cabled (L = 2 m) (1)	XS518BSDAL2	0.120
		M12 connector	XS518BSDAM12	0.060
	NO	M12 connector	XS518BSCAM12	0.060
		Remote M12 connector	XS518BSCAL08M12	0.085
	NC	Pre-cabled (L = 2 m) (1)	XS518BSDBL2	0.120
		M12 connector	XS518BSDBM12	0.060
Ø 30, threaded M30 x 1.5				
10	NO	Pre-cabled (L = 2 m) (1)	XS530BSDAL2	0.205
		M12 connector	XS530BSDAM12	0.145
	NO	M12 connector	XS530BSCAM12	0.145
		Remote M12 connector	XS530BSCAL08M12	0.170
	NC	Pre-cabled (L = 2 m) (1)	XS530BSDBL2	0.205
		M12 connector	XS530BSDBM12	0.145

Accessories (3)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS508BSCAL2 becomes XS508BSCAL5 with a 5 m long cable.

(2) The NO output is connected to terminals 1 and 4 of the M12 connector.


(3) For further information, see page 128.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Two-wire DC




XS500B100L2




XS500B100M12

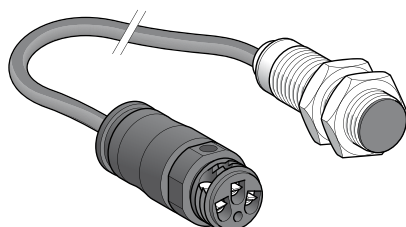


XS500B100L01B (2)

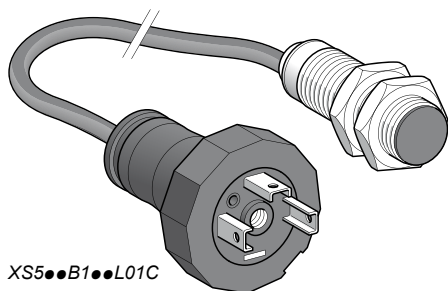

XS500B100L01C

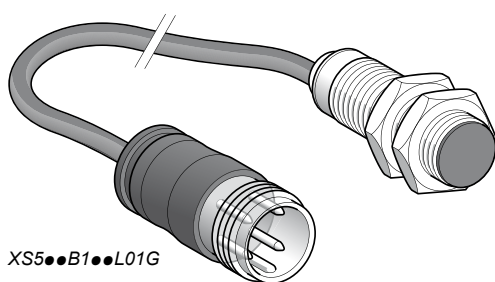

XS500B100L01G



XSZB100

Sensors, 2-wire ~ 12-48 V, long case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 8, threaded M8 x 1				
1.5	NO	Pre-cabled (L = 2 m) (1)	XS508B1DAL2	0.035
		Remote M12 connector	XS508B1DAL08M12	0.050
		M12 connector	XS508B1DAM12	0.025
	NO terminals 1 & 4 (3)	M12 connector	XS508B1CAM12	0.025
		Remote M12 connector	XS508B1CAL08M12	0.050
	NC	Pre-cabled (L = 2 m) (1)	XS508B1DBL2	0.035
		M12 connector	XS508B1DBM12	0.025
Ø 12, threaded M12 x 1				
2	NO	Pre-cabled (L = 2 m) (1)	XS512B1DAL2	0.075
		Remote 7/8" connector	XS512B1DAL08U78	0.050
		M12 connector	XS512B1DAM12	0.035
	NO terminals 1 & 4 (3)	M12 connector	XS512B1CAM12	0.035
		Remote M12 connector	XS512B1CAL08M12	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS512B1DBL2	0.075
		M12 connector	XS512B1DBM12	0.035
		Remote M12 connector	XS512B1DBL08M12	0.060
Ø 18, threaded M18 x 1				
5	NO	Pre-cabled (L = 2 m) (1)	XS518B1DAL2	0.120
		Low temperature version (- 40 °C)	XS518B1DAL2TF (5)	0.120
		Remote screw terminal connector (2)	XS518B1DAL01B	0.085
		Remote EN 175301-803-A connector	XS518B1DAL01C	0.085
		Remote M18 connector	XS518B1DAL01G	0.085
	NO terminals 1 & 4 (3)	M12 connector	XS518B1DAM12	0.060
		M12 connector	XS518B1CAM12	0.060
		Remote M12 connector	XS518B1CAL08M12	0.085
	NC	Pre-cabled (L = 2 m) (1)	XS518B1DBL2	0.120
		M12 connector	XS518B1DBM12	0.060
		Remote M12 connector	XS518B1DBL08M12	0.085
		Remote screw terminal connector (2)	XS518B1DBL01B	0.120
Ø 30, threaded M30 x 1.5				
10	NO	Pre-cabled (L = 2 m) (1)	XS530B1DAL2	0.205
		Low temperature version (- 40 °C)	XS530B1DAL2TF (5)	0.205
		M12 connector	XS530B1DAM12	0.145
		Remote screw terminal connector (2)	XS530B1DAL01B	0.205
		Remote EN 175301-803-A connector	XS530B1DAL01C	0.205
	NO terminals 1 & 4 (3)	Remote M18 connector	XS530B1DAL01G	0.205
		M12 connector	XS530B1CAM12	0.145
		Remote M12 connector	XS530B1CAL08M12	0.170
	NC	Pre-cabled (L = 2 m) (1)	XS530B1DBL2	0.205
		M12 connector	XS530B1DBM12	0.145
		Remote screw terminal connector (2)	XS530B1DBL01B	0.205

Accessories (4)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS508B1DAL2 becomes XS508B1DAL5 with a 5 m long cable.

(2) Protective cable gland included with sensor.

(3) The NO output is connected to terminals 1 and 4 of the M12 connector.

(4) For further information, see page 128.

(5) For a 5 m long cable replace L2 by L5.

Example: XS518B1DAL2TF becomes XS518B1DAL5TF with a 5 m long cable.

For a PUR cable, replace the letter L by P in the reference.

Example: XS518B1DAL2TF becomes XS518B1DAP2TF.

For a 5 m long cable replace P2 by P5.

Example: XS518B1DAP2TF becomes XS518B1DAP5TF with a 5 m long cable.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, standard range, flush mountable

Two-wire DC

Characteristics			
Sensor type		XS5●●B1●●M12, XS5●●BS●●M12	XS5●●B1D●L2, XS5●●BS●●L2
Product certifications		UL, CSA, CÉ	
Connection	Connector	M12	–
	Pre-cabled	–	Length: 2 m
	Remote connector	M12 (L01M12), screw terminal (L01B), EN 175301-803-A (L01C) and M18 (L01G) remote connectors, on 0.15 m flying lead. M12 (L08M12) and 7/8" (L08U78) remote connectors, on 0.80 m flying lead	
Operating zone	Ø 6.5	mm	0...1.2
	Ø 8	mm	0...1.2
	Ø 12	mm	0...1.6
	Ø 18	mm	0...4
	Ø 30	mm	0...8
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection		Conforming to IEC 60529	IP 65 and IP 67 IP 65 and IP 68, double insulation □ (except Ø 6.5 and Ø 8: IP 67)
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70; TF products: - 40...+ 70
Materials	Case	Nickel plated brass (except XS506 and XS508B1: stainless steel, grade 303)	
	Sensing face	PPS	
	Cable	–	PvR 2 x 0.34 mm ² (except XS506 and XS508: 2 x 0.11 mm ²) PUR available (1)
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V	--- 12...48 non polarised for XS5●●B1●, --- 12...24 non polarised for XS5●●BS (except Ø 6.5 short and Ø 8 short: polarised) with protection against reverse polarity
Voltage limits (including ripple)		V	--- 10...58 for XS5●●B1●, --- 10...36 for XS5●●BS
Switching capacity		mA	1.5...100 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 4.2
Residual current, open state		mA	≤ 0.5
Maximum switching frequency	XS506, XS508	Hz	1000 for XS5●●BS, 1400 for XS5●●B1●
	XS512	Hz	1000
	XS518	Hz	1200
	XS530	Hz	1300
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.5: XS506, XS508 and XS512 ≤ 0.6: XS518 ≤ 0.6: XS530
	Recovery	ms	≤ 0.2 (except XS530 ≤ 0.4)

(1) For PUR cable, replace the letter L in the reference by P. Example: XS506BSCAL2 becomes XS506BSCAP2 with PUR cable.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, standard range, flush mountable

Two-wire DC

Wiring schemes


Connector	Pre-cabled	2-wire $\overline{\text{---}}$ non polarised		
M12	BU: Blue BN: Brown	NO output		
		XS5...B1DA...	XS5...B1CA...	NC output XS5...B1DB...
		2-wire $\overline{\text{---}}$ polarised		
		NO output		
		XS5...BSCA...		NC output XS5...BSCB...

Remote connectors L01B, L01C, L01G

Screw terminal (L01B)


The terminal numbering differs according to the version (2-wire $\overline{\text{---}}$, 3-wire $\overline{\text{---}}$, 2-wire $\sim$).

EN 175301-803-A (L01C)



The NO or NC outputs are connected to terminal 2.

M18 (L01G)




Setting-up

Minimum mounting distances (mm)

	Side by side	Face to face	Facing a metal object
$\varnothing 6.5$	$e \geq 3$	$e \geq 18$	$e \geq 4.5$
$\varnothing 8$	$e \geq 3$	$e \geq 18$	$e \geq 4.5$
$\varnothing 12$	$e \geq 4$	$e \geq 24$	$e \geq 6$
$\varnothing 18$	$e \geq 10$	$e \geq 60$	$e \geq 15$
$\varnothing 30$	$e \geq 20$	$e \geq 120$	$e \geq 30$

Dimensions



(1) LED


Sensors		Pre-cabled (mm)		M8 connector (mm)		M12 connector (mm)	
Short case model		a	b	a	b	a	b
$\varnothing 6.5$	XS506BS	33	—	42	—	45	—
$\varnothing 8$	XS508BS	33	25	42	26	45	24
$\varnothing 12$	XS512BS	35	25	—	—	50	30
$\varnothing 18$	XS518BS	39	28	—	—	50	28
$\varnothing 30$	XS530BS	43	32	—	—	55	32
Sensors		Pre-cabled (mm)		M12 connector (mm)			
Long case model		a	b	a	b		
$\varnothing 8$	XS508B1	51	42	62	40		
$\varnothing 12$	XS512B1	53	42	62	42		
$\varnothing 18$	XS518B1	62	52	74	52		
$\varnothing 30$	XS530B1	62	52	74	52		

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Two-wire AC or DC ⁽¹⁾




XS512B1MAL2



XS518B1MAU20



XS530B1MAL2



XSZB112

Sensors, 2-wire $\approx$ 24-240 V, long case model

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
2	NO	Pre-cabled (L = 2 m) (2)	XS512B1MAL2	0.075
		1/2"-20UNF connector	XS512B1MAU20	0.025
	NC	Pre-cabled (L = 2 m) (2)	XS512B1MBL2	0.075
		1/2"-20UNF connector	XS512B1MBU20	0.025

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
5	NO	Pre-cabled (L = 2 m) (2)	XS518B1MAL2	0.100
		1/2"-20UNF connector	XS518B1MAU20	0.060
	NC	Pre-cabled (L = 2 m) (2)	XS518B1MBL2	0.100
		1/2"-20UNF connector	XS518B1MBU20	0.060

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
10	NO	Pre-cabled (L = 2 m) (2)	XS530B1MAL2	0.205
		1/2"-20UNF connector	XS530B1MAU20	0.145
	NC	Pre-cabled (L = 2 m) (2)	XS530B1MBL2	0.205
		1/2"-20UNF connector	XS530B1MBU20	0.145

Accessories (3)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) Ø8 plastic, double insulation, version available: see page 66.

(2) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: **XS512B1MAL2** becomes **XS512B1MAL5** with a 5 m long cable.

(3) For further information, see page 128.

Inductive proximity sensors

OsiSense XS, general purpose


Cylindrical, standard range, flush mountable

Two-wire AC or DC

Characteristics			
Sensor type		XS5...B1M...U20	XS5...B1M...L2
Product certifications		UL, CSA, CE	
Connection	Connector	1/2"-20UNF	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 12	mm	0...1.6
	Ø 18	mm	0...4
	Ø 30	mm	0...8
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529		IP 65 and IP 67
	Conforming to DIN 40050		IP 69K
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case		Nickel plated brass
	Sensing face		PPS
	Cable		— PvR 2 x 0.34 mm ²
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms
Output state indication			Yellow LED: 4 viewing ports at 90° Yellow LED: annular
Rated supply voltage		V	~ or — 24...240 (~ 50/60 Hz)
Voltage limits (including ripple)		V	~ or — 20...264
Switching capacity	XS512B1M...	mA	5...200 (1)
	XS518B1M..., XS530B1M...	mA	~ 5...300 or — 5...200 (1)
Voltage drop, closed state		V	≤ 5.5
Residual current, open state		mA	≤ 0.8
Maximum switching frequency	XS512B1..., XS518B1M...	Hz	~ 25 or — 1000
	XS530B1M...	Hz	~ 25 or — 500
Delays	First-up	ms	≤ 20 XS512B1M..., ≤ 25 XS518B1M... and XS530B1M...
	Response	ms	≤ 0.5
	Recovery	ms	≤ 0.2 XS512B1M..., ≤ 0.5 XS518B1M..., ≤ 2 XS530B1M...

(1) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes

Connector	Pre-cabled	2-wire ~ or —
1/2"-20UNF	BU: Blue BN: Brown	NO or NC output
		
		±: on connector models only


Setting-up

Minimum mounting distances (mm)

Sensor	Side by side	Face to face	Facing a metal object
Ø 12	e ≥ 8	e ≥ 48	e ≥ 12
Ø 18	e ≥ 16	e ≥ 100	e ≥ 25
Ø 30	e ≥ 30	e ≥ 180	e ≥ 45

Dimensions

Sensor	XS6			
	Pre-cabled (mm)		Connector (mm)	
	a	b	a	b
XS512B1M	53	42	62	42
XS518B1M	62	52	73	52
XS530B1M	62	52	73	52




(1) LED

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Three-wire DC, solid-state output



XS106B3●●L2



XS108B3●●M8



XS112B3●●L2

Sensors, 3-wire 12-24 V, short case model

Sensing distance (Sn) mm	Function	Output	Connection	Sold in lots of	Reference unit	Weight kg		
Ø 6.5, plain								
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS106B3PAL2	0.060		
			M8 connector	1	XS106B3PAM8	0.030		
			M12 connector	1	XS106B3PAM12	0.050		
			Pre-cabled (L = 2 m)	20	XS106B3PAL2TQ	0.980		
			M8 connector	20	XS106B3PAM8TQ	0.320		
		NPN	Pre-cabled (L = 2 m)	1	XS106B3NAL2	0.060		
			M8 connector	1	XS106B3NAM8	0.030		
		NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS106B3PBL2	0.060	
				M8 connector	1	XS106B3PBM8	0.030	
			NPN	Pre-cabled (L = 2 m) (1)	1	XS106B3NBL2	0.060	
				M8 connector	1	XS106B3NBM8	0.030	
Ø 8, threaded M8 x 1								
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS108B3PAL2	0.070		
			M8 connector	1	XS108B3PAM8	0.030		
			M12 connector	1	XS108B3PAM12	0.060		
			Pre-cabled (L = 2 m)	20	XS108B3PAL2TQ	1.120		
			M8 connector	20	XS108B3PAM8TQ	0.460		
			M12 connector	20	XS108B3PAM12TQ	0.940		
			NPN	Pre-cabled (L = 2 m) (1)	1	XS108B3NAL2	0.070	
				M8 connector	1	XS108B3NAM8	0.030	
				M12 connector	1	XS108B3NAM12	0.060	
				Pre-cabled (L = 2 m)	20	XS108B3NAL2TQ	1.120	
				M8 connector	20	XS108B3NAM8TQ	0.460	
		NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS108B3PBL2	0.070	
				M8 connector	1	XS108B3PBM8	0.030	
				M12 connector	1	XS108B3PBM12	0.060	
			NPN	Pre-cabled (L = 2 m) (1)	1	XS108B3NBL2	0.070	
				M8 connector	1	XS108B3NBM8	0.030	
				M12 connector	1	XS108B3NBM12	0.060	
	Ø 12, threaded M12 x 1							
	4	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS112B3PAL2	0.090	
				M12 connector	1	XS112B3PAM12	0.030	
				Pre-cabled (L = 2 m)	20	XS112B3PAL2TQ	1.600	
				M12 connector	20	XS112B3PAM12TQ	0.470	
				NPN	Pre-cabled (L = 2 m) (1)	1	XS112B3NAL2	0.090
M12 connector					1	XS112B3NAM12	0.030	
Pre-cabled (L = 2 m)					20	XS112B3NAL2TQ	1.600	
M12 connector					20	XS112B3NAM12TQ	0.470	
			NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS112B3PBL2	0.090
					M12 connector	1	XS112B3PBM12	0.030
					M12 connector	20	XS112B3PBM12TQ	0.470
					NPN	Pre-cabled (L = 2 m) (1)	1	XS112B3NBL2
M12 connector	1	XS112B3NBM12	0.030					

(1) For a 5 m long cable replace L2 by L5.


Example: XS106B3PAL2 becomes XS106B3PAL5 with a 5 m long cable.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Three-wire DC, solid-state output




XS118B3●●M12



XS118B3●●L2



XS130B3●●L2



XSZB1●●

Sensors, 3-wire 12-24 V, short case model (continued)

Sensing distance (Sn) mm	Function	Output	Connection	Sold in lots of	Unit reference	Weight kg
Ø 18, threaded M18 x 1						
8	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS118B3PAL2	0.110
			M12 connector	1	XS118B3PAM12	0.060
			Pre-cabled (L = 2 m)	20	XS118B3PAL2TQ	2.000
			M12 connector	20	XS118B3PAM12TQ	1.140
	NPN	NPN	Pre-cabled (L = 2 m) (1)	1	XS118B3NAL2	0.110
			M12 connector	1	XS118B3NAM12	0.060
			Pre-cabled (L = 2 m)	20	XS118B3NAL2TQ	2.000
			M12 connector	20	XS118B3NAM12TQ	1.140
	NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS118B3PBL2	0.110
			M12 connector	1	XS118B3PBM12	0.060
			Pre-cabled (L = 2 m) (1)	1	XS118B3NBL2	0.110
			M12 connector	1	XS118B3NBM12	0.060

Ø 30, threaded M30 x 1.5

15	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS130B3PAL2	0.180
			M12 connector	1	XS130B3PAM12	0.130
			Pre-cabled (L = 2 m)	20	XS130B3PAL2TQ	3.360
			M12 connector	20	XS130B3PAM12TQ	2.000
	NPN	NPN	Pre-cabled (L = 2 m) (1)	1	XS130B3NAL2	0.180
			M12 connector	1	XS130B3NAM12	0.130
			Pre-cabled (L = 2 m)	20	XS130B3NAL2TQ	2.000
			M12 connector	20	XS130B3NAM12TQ	2.000
	NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS130B3PBL2	0.180
			M12 connector	1	XS130B3PBM12	0.130
			Pre-cabled (L = 2 m) (1)	1	XS130B3NBL2	0.180
			M12 connector	1	XS130B3NBM12	0.130

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8 (M8 x 1)	XSZB108	0.006
	Ø 12 (M12 x 1)	XSZB112	0.006
	Ø 18 (M18 x 1)	XSZB118	0.010
	Ø 30 (M30 x 1.5)	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5.

Example: XS118B3PAL2 becomes XS118B3PAL5 with a 5 m long cable.


(2) For further information, see page 128.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Three-wire DC, solid-state output




XS6...B1...L2




XS6...B1...M12

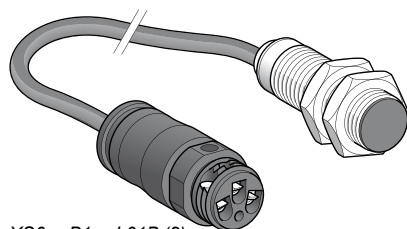


XS6...B1...L01B (2)

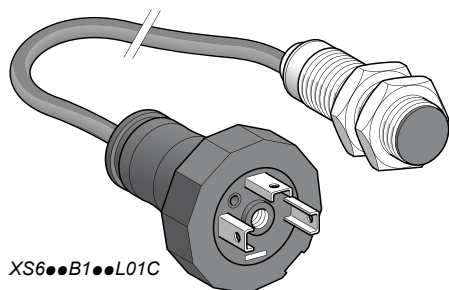

XS6...B1...L01C

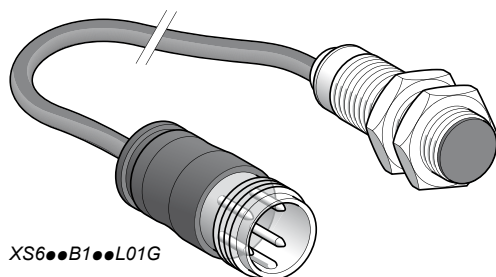

XS6...B1...L01G



XSZB...

Sensors, 3-wire 12-48 V, long case model

Sensing Function Output Connection				Reference	Weight kg	
distance (Sn) mm						
Ø 8, threaded M8 x 1						
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS608B1PAL2	0.035	
			M12 connector	XS608B1PAM12	0.015	
		NPN	Pre-cabled (L = 2 m) (1)	XS608B1NAL2	0.035	
			M12 connector	XS608B1NAM12	0.015	
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS608B1PBL2	0.035	
			M12 connector	XS608B1PBM12	0.015	
		NPN	Pre-cabled (L = 2 m) (1)	XS608B1NBL2	0.035	
			M12 connector	XS608B1NBM12	0.015	
	Ø 12, threaded M12 x 1					
	4	NO	PNP	Pre-cabled (L = 2 m) (1)	XS612B1PAL2	0.075
				M12 connector	XS612B1PAM12	0.020
			NPN	Pre-cabled (L = 2 m) (1)	XS612B1NAL2	0.075
M12 connector				XS612B1NAM12	0.020	
NC		PNP	Pre-cabled (L = 2 m) (1)	XS612B1PBL2	0.075	
			M12 connector	XS612B1PBM12	0.020	
		NPN	Pre-cabled (L = 2 m) (1)	XS612B1NBL2	0.075	
			M12 connector	XS612B1NBM12	0.020	
Ø 18, threaded M18 x 1						
8		NO	PNP	Pre-cabled (L = 2 m) (1)	XS618B1PAL2	0.100
				M12 connector	XS618B1PAM12	0.040
				Remote screw terminal connector	XS618B1PAL01B (2)	0.100
	Remote EN 175301-803-A connector			XS618B1PAL01C	0.100	
	NPN		Remote M18 connector	XS618B1PAL01G	0.100	
			Pre-cabled (L = 2 m) (1)	XS618B1NAL2	0.100	
			M12 connector	XS618B1NAM12	0.040	
			Remote screw terminal connector	XS618B1NAL01B (2)	0.100	
	NC		PNP	Remote EN 175301-803-A connector	XS618B1NAL01C	0.100
				Pre-cabled (L = 2 m) (1)	XS618B1PBL2	0.100
				M12 connector	XS618B1PBM12	0.040
				Remote screw terminal connector	XS618B1PBL01B (2)	0.100
		NPN	PNP	Remote EN 175301-803-A connector	XS618B1PBL01C	0.100
				Pre-cabled (L = 2 m) (1)	XS618B1NBL2	0.100
				M12 connector	XS618B1NBM12	0.040
				Remote screw terminal connector	XS618B1NBL01B (2)	0.100
				Remote EN 175301-803-A connector	XS618B1NBL01C	0.100
Ø 30, threaded M30 x 1.5						
15	NO	PNP	Pre-cabled (L = 2 m) (1)	XS630B1PAL2	0.205	
			M12 connector	XS630B1PAM12	0.145	
			Remote screw terminal connector	XS630B1PAL01B (2)	0.205	
			Remote EN 175301-803-A connector	XS630B1PAL01C	0.205	
		NPN	Remote M18 connector	XS630B1PAL01G	0.205	
			Pre-cabled (L = 2 m) (1)	XS630B1NAL2	0.205	
			M12 connector	XS630B1NAM12	0.145	
			Remote screw terminal connector	XS630B1NAL01B (2)	0.205	
		NC	PNP	Remote EN 175301-803-A connector	XS630B1NAL01C	0.205
				Pre-cabled (L = 2 m) (1)	XS630B1PBL2	0.205
				M12 connector	XS630B1PBM12	0.145
				Remote screw terminal connector	XS630B1PBL01B (2)	0.205
		NPN	PNP	Remote EN 175301-803-A connector	XS630B1PBL01C	0.205
				Remote M18 connector	XS630B1PBL01G	0.205
				Pre-cabled (L = 2 m) (1)	XS630B1NBL2	0.205
				M12 connector	XS630B1NBM12	0.145
				Remote screw terminal connector	XS630B1NBL01B (2)	0.205
				Remote EN 175301-803-A connector	XS630B1NBL01C	0.205

Accessories (3)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS608B1PAL2 becomes XS608B1PAL5 with a 5 m long cable.

(2) Protective cable gland included with sensor.


(3) For further information, see page 128.

Characteristics			
Sensor type		XS1/XS6...B...M8	XS1/XS6...B...M12
Product certifications		UL, CSA, CE	
Connection	Connector		M12
	Pre-cabled	—	—
	Remote connector	Remote screw terminal (L01B), EN 175301-803-A (L01C) and M18 (L01G) connectors, on 0.15 m flying lead.	
Operating zone (1)	Ø 6.5 and Ø 8	mm	0...2
	Ø 12	mm	0...3.2
	Ø 18	mm	0...6.4
	Ø 30	mm	0...12
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 65 and IP 67	
	Conforming to DIN 40050	IP 69K for Ø 12, 18 and 30 sensors	
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	Nickel plated brass (except XS608: stainless steel, grade 303)	
	Sensing face	PPS	
	Cable	—	
			PvR 3 x 0.34 mm ² except Ø 6.5 and 8: 3 x 0.11 mm ²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing ports at 90°	
Rated supply voltage		V	XS1: ≡ 12...24 with protection against reverse polarity XS6: ≡ 12...48 with protection against reverse polarity
Voltage limits (including ripple)		V	XS1: ≡ 10...36; XS6: ≡ 10...58
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	Ø 6.5, Ø 8 and Ø 12	Hz	2500
	Ø 18	Hz	1000
	Ø 30	Hz	500
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.2 for Ø 6.5, Ø 8 and Ø 12, ≤ 0.3 for Ø 18, ≤ 0.6 for Ø 30
	Recovery	ms	≤ 0.2 for Ø 6.5, Ø 8 and Ø 12, ≤ 0.7 for Ø 18, ≤ 1.4 for Ø 30

(1) Detection curves, see page 132.

Wiring schemes


Connector (1)




Pre-cabled

BU: Blue
BN: Brown
BK: Black

PNP



NPN




For M8 connector, NO and NC outputs on terminal 4

(1) For pin arrangement of remote connectors L01B, L01C and L01G, see page 31.


Setting-up

Minimum mounting distances (mm)



Sensors	Side by side	Face to face	Facing a metal object
Ø 6.5	e ≥ 5	e ≥ 30	e ≥ 8
Ø 8	e ≥ 5	e ≥ 30	e ≥ 8
Ø 12	e ≥ 8	e ≥ 50	e ≥ 12
Ø 18	e ≥ 16	e ≥ 100	e ≥ 25
Ø 30	e ≥ 30	e ≥ 180	e ≥ 45

Dimensions



(1) LED


Sensors		Pre-cabled (mm)		M8 connector (mm)		M12 connector (mm)	
Short case model		a	b	a	b	a	b
Ø 6.5	XS106B3	33	—	42	—	45	—
Ø 8	XS108B3	33	25	42	26	45	24
Ø 12	XS112B3	35	25	—	—	50	30
Ø 18	XS118B3	39	28	—	—	50	28
Ø 30	XS130B3	43	32	—	—	55	32
Sensors		Pre-cabled (mm)		M12 connector (mm)			
Long case model		a	b	a	b		
Ø 8	XS608B1	51	42	62	40		
Ø 12	XS612B1	53	42	62	42		
Ø 18	XS618B1	62	52	74	52		
Ø 30	XS630B1	62	52	74	52		

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Two-wire DC, solid-state output




XS606B3●●L2




XS612B3●●L2



XS6●●B1●●L2



XS6●●B1●●M12



XSZB1●●

Sensors, 2-wire 12-24 V, short case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 6.5, plain				
2.5	NO	Pre-cabled (L = 2 m) (1)	XS606B3CAL2	0.060
		Remote M12 connector	XS606B3CAL01M12	0.070
	NC	Pre-cabled (L = 2 m) (1)	XS606B3CBL2	0.060
Ø 8, threaded M8 x 1				
2.5	NO	Pre-cabled (L = 2 m) (1)	XS608B3CAL2	0.070
		Remote M12 connector	XS608B3CAL01M12	0.070
	NC	Pre-cabled (L = 2 m) (1)	XS608B3CBL2	0.070
Ø 12, threaded M12 x 1				
4	NO	Pre-cabled (L = 2 m) (1)	XS612B3DAL2	0.090
		M12 connector	XS612B3DAM12	0.030
	NC	Pre-cabled (L = 2 m) (1)	XS612B3DBL2	0.090
Ø 18, threaded M18 x 1				
8	NO	Pre-cabled (L = 2 m) (1)	XS618B3DAL2	0.110
		M12 connector	XS618B3DAM12	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS618B3DBL2	0.110
Ø 30, threaded M30 x 1.5				
15	NO	Pre-cabled (L = 2 m) (1)	XS630B3DAL2	0.180
		M12 connector	XS630B3DAM12	0.130
	NC	Pre-cabled (L = 2 m) (1)	XS630B3DBL2	0.180
Ø 30, threaded M30 x 1.5				
15	NO	Pre-cabled (L = 2 m) (1)	XS630B3DAL2	0.180
		M12 connector	XS630B3DAM12	0.130
	NC	Pre-cabled (L = 2 m) (1)	XS630B3DBL2	0.180

Sensors, 2-wire 12-48 V, long case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 6.5, plain				
2.5	NO	Pre-cabled (L = 2 m) (1)	XS606B1DAL2	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS606B1DBL2	0.060
Ø 8, threaded M8 x 1				
2.5	NO	Pre-cabled (L = 2 m) (1)	XS608B1DAL2	0.035
		M12 connector	XS608B1DAM12	0.015
	NC	Pre-cabled (L = 2 m) (1)	XS608B1DBL2	0.035
Ø 12, threaded M12 x 1				
4	NO	Pre-cabled (L = 2 m) (1)	XS612B1DAL2	0.180
		M12 connector	XS612B1DAM12	0.020
	NC	Pre-cabled (L = 2 m) (1)	XS612B1DBL2	0.075
Ø 18, threaded M18 x 1				
8	NO	Pre-cabled (L = 2 m) (1)	XS618B1DAL2	0.100
		M12 connector	XS618B1DAM12	0.040
	NC	Pre-cabled (L = 2 m) (1)	XS618B1DBL2	0.100
Ø 30, threaded M30 x 1.5				
15	NO	Pre-cabled (L = 2 m) (1)	XS630B1DAL2	0.205
		M12 connector	XS630B1DAM12	0.145
	NC	Pre-cabled (L = 2 m) (1)	XS630B1DBL2	0.205

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8 (M8 x 1)	XSZB108	0.006
	Ø 12 (M12 x 1)	XSZB112	0.006
	Ø 18 (M18 x 1)	XSZB118	0.010
	Ø 30 (M30 x 1.5)	XSZB130	0.020






(1) For a 5 m long cable replace L2 by L5.


Example: XS606B3CAL2 becomes XS606B3CAL5 with a 5 m long cable.

(2) For further information, see page 128.

Characteristics			
Sensor type		XS6...B3...M12 XS6...B1D...M12	XS6...B3...L2 XS6...B1D...L2
Product certifications		UL, CSA, CEC	
Connection	Connector	M12 connector or remote M12 connector (L01M12) on 0.15 m flying lead	
	Pre-cabled	Length 2 m	
Operating zone (1)	Ø 6.5 and Ø 8	mm	0...2
	Ø 12	mm	0...3.2
	Ø 18	mm	0...6.4
	Ø 30	mm	0...12
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 65 and IP 67	
	Conforming to DIN 40050	IP 69K	
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	Nickel plated brass (except XS606B1D and XS608B1D: stainless steel, grade 303)	
	Sensing face	PPS	
	Cable	PvR 2 x 0.34 mm ² except Ø 6.5 and Ø 8: 2 x 0.11 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing ports at 90°	
Rated supply voltage		V	--- 12...48 non polarised for XS6...B1D, --- 12...24 non polarised for XS6...B3... (except Ø 6.5 short and Ø 8 short: polarised), with protection against reverse polarity
Voltage limits (including ripple)		V	--- 10...58 for XS6...B1D --- 10...36 for XS6...B3...
Switching capacity		mA	≤ 100 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 4.2
Residual current, open state		mA	≤ 0.5 mA
Maximum switching frequency	Ø 6.5, Ø 8	Hz	1400 for XS6...B1D, 1100 for XS6...B3...
	Ø 12	Hz	1300
	Ø 18	Hz	1500
	Ø 30	Hz	800
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.5
	Recovery	ms	≤ 0.2 for Ø 6.5, Ø 8 and Ø 12; 0.3 for Ø 18; 0.6 for Ø 30

(1) Detection curves, see page 132.

Wiring schemes		Setting-up			
M12 connector		Minimum mounting distances (mm)			
Pre-cabled					
BU: Blue BN: Brown					
2-wire --- non polarised					
NO output					
					
NC output					
					
2-wire --- polarised					
XS6...B3CA					
					
XS6...B3CB					
					

Dimensions					
	Sensors	Pre-cabled (mm)		M12 connector (mm)	
	Short case model	a	b	a	b
	Ø 6.5 XS606B3C	33	—	—	—
	Ø 8 XS608B3C	33	25	—	24
	Ø 12 XS612B3D	35	25	50	30
	Ø 18 XS618B3D	39	28	50	28
	Ø 30 XS630B3D	43	32	55	32
	Long case model	a	b	a	b
	Ø 6.5 XS606B1D	51	—	—	—
	Ø 8 XS608B1D	51	42	62	40
	Ø 12 XS612B1D	53	42	62	42
	Ø 18 XS618B1D	62	52	74	52
	Ø 30 XS630B1D	62	52	74	52


(1) LED

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Two-wire AC or DC ⁽¹⁾




XS612B1MAL2




XS618B1MAU20

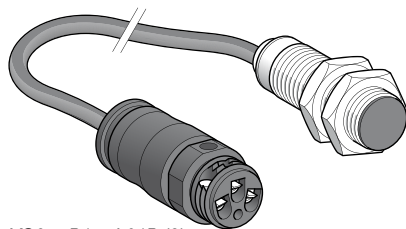


XS630B1L01B (3)

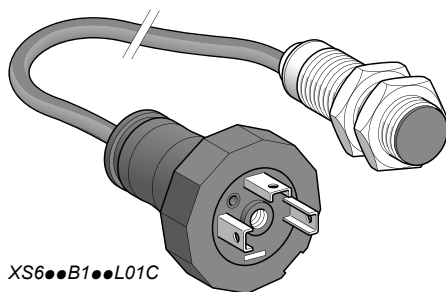

XS630B1L01C

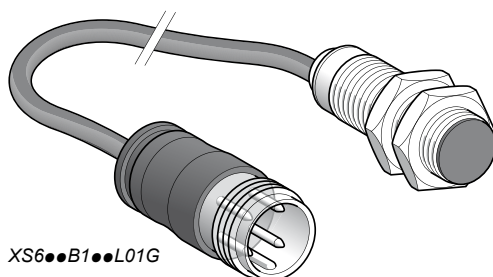

XS630B1L01G



XSZB112

Sensors, 2-wire ~ 24-240 V, long case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 12, threaded M12 x 1				
4	NO	Pre-cabled (L = 2 m) (2)	XS612B1MAL2	0.075
		1/2"-20UNF connector	XS612B1MAU20	0.025
	NC	Pre-cabled (L = 2 m) (2)	XS612B1MBL2	0.075
		1/2"-20UNF connector	XS612B1MBU20	0.025

Ø 18, threaded M18 x 1

8	NO	Pre-cabled (L = 2 m) (2)	XS618B1MAL2	0.100
		1/2"-20UNF connector	XS618B1MAU20	0.060
		Remote screw terminal connector	XS618B1MAL01B (3)	0.100
		Remote EN 175301-803-A connector	XS618B1MAL01C	0.100
		Remote M18 connector	XS618B1MAL01G	0.100
	NC	Pre-cabled (L = 2 m) (2)	XS618B1MBL2	0.100
		1/2"-20UNF connector	XS618B1MBU20	0.060
		Remote screw terminal connector	XS618B1MBL01B (3)	0.100
		Remote EN 175301-803-A connector	XS618B1MBL01C	0.100
		Remote M18 connector	XS618B1MBL01G	0.100

Ø 30, threaded M30 x 1.5

15	NO	Pre-cabled (L = 2 m) (2)	XS630B1MAL2	0.205
		1/2"-20UNF connector	XS630B1MAU20	0.145
		Remote screw terminal connector	XS630B1MAL01B (3)	0.205
		Remote EN 175301-803-A connector	XS630B1MAL01C	0.205
		Remote M18 connector	XS630B1MAL01G	0.205
	NC	Pre-cabled (L = 2 m) (2)	XS630B1MBL2	0.205
		1/2"-20UNF connector	XS630B1MBU20	0.145
		Remote screw terminal connector	XS630B1MBL01B (3)	0.205
		Remote EN 175301-803-A connector	XS630B1MBL01C	0.205
		Remote M18 connector	XS630B1MBL01G	0.205

Accessories (4)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) Ø 8 plastic, double insulation, version available: see page 66.

(2) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.
Example: XS612B1MAL2 becomes **XS612B1MAL5** with a 5 m long cable.

(3) Protective cable gland included with sensor.


(4) For further information, see page 128.

Characteristics			
Sensor type		XS6...B1M...U20	XS6...B1M...L...
Product certifications		UL, CSA, CEC	
Connection	Connector	1/2"-20UNF	—
	Pre-cabled	—	Length 2 m
	Remote connector	Remote screw terminal (L01B), EN 175301-803-A (L01C) and M18 (L01G) connectors, on 0.15 m flying lead.	
Operating zone (1)	Ø 12	mm	0...3.2
	Ø 18	mm	0...6.4
	Ø 30	mm	0...12
Differential travel		%	
		1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 65, IP 67	
	Conforming to DIN 40050	IP 69K	
Storage temperature		°C	
		- 40...+ 85	
Operating temperature		°C	
		- 25...+ 70	
Materials	Case	Nickel plated brass	
	Sensing face	PPS	
	Cable	PvR 2 x 0.34 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: annular on pre-cabled version Yellow LED with 4 viewing ports at 90° on connector version	
Rated supply voltage		V	
		≈ 24...240 (~ 50/60 Hz)	
Voltage limits (including ripple)		V	
		≈ 20...264	
Switching capacity	XS612B1M...	mA	
	XS618B1M...	mA	
	XS630B1M...	mA	
		5...200 (2)	
		~ 5...300 or ~ 5...200 (2)	
Voltage drop, closed state		V	
		≤ 5.5	
Residual current, open state		mA	
		≤ 0.8	
Maximum switching frequency (DC/AC)	Ø 12	Hz	
	Ø 18	Hz	
	Ø 30	Hz	
		~ 1000 / ~ 25	
		~ 500 / ~ 25	
Delays	First-up	ms	
	Response	ms	
	Recovery	ms	
		≤ 25 for Ø 18 and Ø 30 sensors; ≤ 20 for Ø 12 sensors	
		≤ 0.5	
		≤ 0.2 for Ø 12 sensors; ≤ 0.5 for Ø 18 sensors; ≤ 2 for Ø 30 sensors	

(1) Detection curves, see page 132.

(2) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes


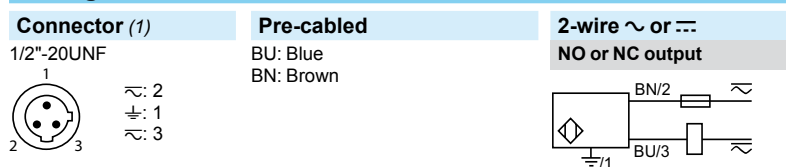


±: on connector models only

(1) For pin arrangement of remote connectors L01B, L01C and L01G, see page 31.


Setting-up

Minimum mounting distances (mm)



Sensors	Side by side	Face to face	Facing a metal object
Ø 12	e ≥ 8	e ≥ 50	e ≥ 12
Ø 18	e ≥ 16	e ≥ 100	e ≥ 25
Ø 30	e ≥ 30	e ≥ 180	e ≥ 45

Dimensions



Sensors		Pre-cabled (mm)		Connector (mm)	
		a	b	a	b
Ø 12	XS612B1M...	53	42	62	42
Ø 18	XS618B1M...	62	52	73	52
Ø 30	XS630B1M...	62	52	73	52


(1) LED

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, non flush mountable


Three-wire DC, solid-state output




XS612B4●●L2



XS618B4●●M12



XS630B4●●M12



XSZB●●●

Sensors, 3-wire 12...48 V, long case model

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
7	NO	PNP	Pre-cabled (L = 2 m) (1)	XS612B4PAL2	0.075
			M12 connector	XS612B4PAM12	0.020
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS612B4NAL2	0.075
			M12 connector	XS612B4NAM12	0.020
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS612B4PBL2	0.075
			M12 connector	XS612B4PBM12	0.020
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS612B4NBL2	0.075
			M12 connector	XS612B4NBM12	0.020

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
12	NO	PNP	Pre-cabled (L = 2 m) (1)	XS618B4PAL2	0.100
			M12 connector	XS618B4PAM12	0.040
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS618B4NAL2	0.100
			M12 connector	XS618B4NAM12	0.040
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS618B4PBL2	0.100
			M12 connector	XS618B4PBM12	0.040
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS618B4NBL2	0.100
			M12 connector	XS618B4NBM12	0.040

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
22	NO	PNP	Pre-cabled (L = 2 m) (1)	XS630B4PAL2	0.205
			M12 connector	XS630B4PAM12	0.145
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS630B4NAL2	0.205
			M12 connector	XS630B4NAM12	0.145
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS630B4PBL2	0.205
			M12 connector	XS630B4PBM12	0.145
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS630B4NBL2	0.205
			M12 connector	XS630B4NBM12	0.145

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS612B4PAL2 becomes XS612B4PAL5 with a 5 m long cable.


(2) For further information, see page 128.

Characteristics			
Sensor type		XS6●●B4●●M12	XS6●●B4●●L2
Product certifications		UL, CSA, CE	
Connection	Connector	M12	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 12	mm	0...5.6
	Ø 18	mm	0...9.6
	Ø 30	mm	0...17.6
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection		Conforming to IEC 60529	IP 65 and IP 67 IP 65 and IP 68, double insulation □
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	Nickel plated brass	
	Sensing face	PPS	
	Cable	—	PvR 3 x 0.34 mm ²
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V	— 12...48 with protection against reverse polarity
Voltage limits (including ripple)		V	— 10...58
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	XS612B4●●●●	Hz	2500
	XS618B4●●●●	Hz	1000
	XS630B4●●●●	Hz	500
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.2 Ø 12, ≤ 0.3 Ø 18, ≤ 0.6 Ø 30
	Recovery	ms	≤ 0.2 Ø 12, ≤ 0.7 Ø 18, ≤ 1.4 Ø 30

Wiring schemes

Connector	Pre-cabled	PNP	NPN
M12 4 3 1 2	BU: Blue BN: Brown BK: Black		

Setting-up

Minimum mounting distances (mm)			
 Object to be detected			
	Side by side	Face to face	Facing a metal object
Ø 12	$e \geq 48$	$e \geq 84$	$e \geq 21$
Ø 18	$e \geq 72$	$e \geq 144$	$e \geq 36$
Ø 30	$e \geq 120$	$e \geq 264$	$e \geq 66$

Dimensions

	Pre-cabled (mm)			Connector (mm)		
	a	b	c	a	b	c
XS6 Ø 12	55	42	5	66	42	5
Ø 18	60	44	8	72	44	8
Ø 30	63	41	13	74	41	13


(1) LED

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, non flush mountable


Two-wire AC or DC



XS6●●B4M●L2



XS6●●B4M●U20



XSZB1●●

Sensors, 2-wire $\sim$ 24... 240 V, long case model

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
12	NO	Pre-cabled (L = 2 m) (1)	XS618B4MAL2	0.120
		1/2"-20UNF connector	XS618B4MAU20	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS618B4MBL2	0.120
		1/2"-20UNF connector	XS618B4MBU20	0.060

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
22	NO	Pre-cabled (L = 2 m) (1)	XS630B4MAL2	0.205
		1/2"-20UNF connector	XS630B4MAU20	0.145
	NC	Pre-cabled (L = 2 m) (1)	XS630B4MBL2	0.205
		1/2"-20UNF connector	XS630B4MBU20	0.145

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.


Example: XS618B4MAL2 becomes **XS618B4MAL5** with a 5 m long cable.

(2) For further information, see page 128.




Characteristics			
Sensor type		XS6●●B4M●U20	XS6●●B4M●L2
Product certifications		UL, CSA, CÉ	
Connection	Connector	1/2"-20UNF	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 18	mm	0...9.6
	Ø 30	mm	0...17.6
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection		Conforming to IEC 60529	IP 65 and IP 67 IP 65 and IP 68, double insulation □
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	Nickel plated brass	
	Sensing face	PPS	
	Cable	—	PvR 2 x 0.34 mm ²
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V	~ or — 24...240 (~ 50/60 Hz)
Voltage limits (including ripple)		V	~ or — 20...264
Switching capacity		mA	~ 5...300 or — 5...200 (1)
Voltage drop, closed state		V	≤ 5.5
Residual current, open state		mA	≤ 0.8
Maximum switching frequency	XS618B4M●●●	Hz	~ 25 or — 1000
	XS630B4M●●●	Hz	~ 25 or — 300
Delays	First-up	ms	≤ 30 XS618B4M●●● and XS630B4M●●●
	Response	ms	≤ 0.5
	Recovery	ms	≤ 0.5 XS618B4M●●●, ≤ 2 XS630B4M●●●

(1) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes

Connector	Pre-cabled	2-wire ~ or —
1/2"-20UNF	BU: Blue BN: Brown	NO or NC output
		
		⚡: on connector models only

Setting-up

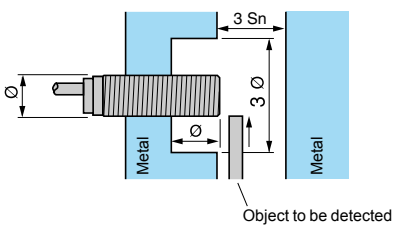Minimum mounting distances (mm)			
			
	Side by side Ø 18 e ≥ 72 Ø 30 e ≥ 120	Face to face e ≥ 144 e ≥ 264	Facing a metal object e ≥ 36 e ≥ 66

Dimensions

	Pre-cabled (mm)			Connector (mm)		
	a	b	c	a	b	c
XS6 Ø 18	60	44	8	72	44	8
Ø 30	63	41	13	74	41	13

(1) LED


Inductive proximity sensors

OsiSense XS, general purpose, standard range


Flat format, flush mountable

Two-wire DC


Three-wire DC, solid-state output




XS7J1A1●●L2



XS7J1A1●●L01M8



XS7F1A1●●L2

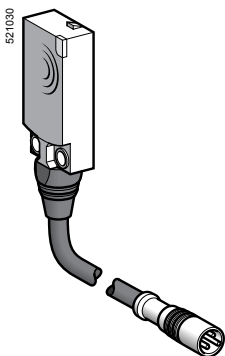

XS7F1A1●●L01M8

Flat, 8 x 22 x 8 mm format ^{(1) (2)}

Three-wire ---

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
2.5	NO	PNP	Pre-cabled (L = 2 m) (3)	XS7J1A1PAL2	0.060
			Remote M8 connector on 0.15 m flying lead	XS7J1A1PAL01M8	0.040
	NPN	PNP	Pre-cabled (L = 2 m) (3)	XS7J1A1NAL2	0.060
			Remote M8 connector on 0.15 m flying lead	XS7J1A1NAL01M8	0.040
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS7J1A1PBL2	0.060
			Remote M8 connector on 0.15 m flying lead	XS7J1A1PBL01M8	0.040
		NPN	Pre-cabled (L = 2 m) (3)	XS7J1A1NBL2	0.060
			Remote M8 connector on 0.15 m flying lead	XS7J1A1NBL01M8	0.040

Two-wire ---

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
2.5	NO		Pre-cabled (L = 2 m) (3)	XS7J1A1DAL2	0.050
			Remote M8 connector on 0.15 m flying lead	XS7J1A1DAL01M8	0.035
	NC		Pre-cabled (L = 2 m) (3)	XS7J1A1DBL2	0.050
			Remote M8 connector on 0.15 m flying lead	XS7J1A1DBL01M8	0.035

Flat, 15 x 32 x 8 mm format ⁽¹⁾

Three-wire ---

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
5	NO	PNP	Pre-cabled (L = 2 m) (3)	XS7F1A1PAL2	0.065
			Remote M8 connector on 0.15 m flying lead	XS7F1A1PAL01M8	0.045
	NPN	PNP	Pre-cabled (L = 2 m) (3)	XS7F1A1NAL2	0.065
			Remote M8 connector on 0.15 m flying lead	XS7F1A1NAL01M8	0.045
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS7F1A1PBL2	0.065
			Remote M8 connector on 0.15 m flying lead	XS7F1A1PBL01M8	0.045
		NPN	Pre-cabled (L = 2 m) (3)	XS7F1A1NBL2	0.065
			Remote M8 connector on 0.15 m flying lead	XS7F1A1NBL01M8	0.045

Two-wire ---

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
5	NO		Pre-cabled (L = 2 m) (3)	XS7F1A1DAL2	0.055
			Remote M8 connector on 0.15 m flying lead	XS7F1A1DAL01M8	0.045
	NC		Pre-cabled (L = 2 m) (3)	XS7F1A1DBL2	0.055
			Remote M8 connector on 0.15 m flying lead	XS7F1A1DBL01M8	0.045

(1) For accessories, see page 128.

(2) Sensors **XS7J** include a fixing clamp with screw.

(3) For a 5 m long cable replace L2 by **L5**; for a 10 m long cable replace L2 by **L10**.

Example: **XS7J1A1PAL2** becomes **XS7J1A1PAL5** with a 5 m long cable.

Inductive proximity sensors

OsiSense XS, general purpose, standard range

Flat format, flush mountable

Two-wire DC

Three-wire DC, solid-state output

Characteristics			
Sensor type		XS7J●●●●●L01M8	XS7F●●●●●L01M8
Product certifications		CE	UL, CSA, CE
Connection	Connector	Remote M8 connector on 0.15 m flying lead	
	Pre-cabled	Length: 2 m	
Operating zone	XS7J	mm	0...2
	XS7F	mm	0...4
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529		IP 67 (XS7J), IP 68 (XS7F)
Storage temperature		°C	-40...+85
Operating temperature		°C	-25...+70
Materials	Case		PBT
	Cable		PvR 3 x 0.11 mm ² or 2 x 0.11 mm ² (XS7F: 2 or 3 x 0.34 mm ²)
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms
Output state indication			Yellow LED
Rated supply voltage		V	12...24 with protection against reverse polarity
Voltage limits (including ripple)		V	10...36
Current consumption, no-load	3-wire	mA	≤ 10
Residual current, open state	2-wire	mA	≤ 0.5
Switching capacity	3-wire	mA	100 with overload and short-circuit protection
	2-wire	mA	1.5...100 with overload and short-circuit protection
Voltage drop, closed state	3-wire	V	≤ 2
	2-wire	V	≤ 4
Maximum switching frequency	3-wire	kHz	2
	2-wire	kHz	4 for XS7J, 5 for XS7F
Delays	First-up	ms	Three-wire: 5
		ms	Two-wire: 10 XS7J, 5 XS7F
	Response	ms	Three-wire: 0,1
		ms	Two-wire: 0,5 XS7J, 5 XS7F
	Recovery	ms	Three-wire: 0,1
		ms	Two-wire: 1 XS7J, 5 XS7F

Wiring schemes

Connector	Pre-cabled	PNP NO or NC	NPN NO or NC	2-wire NO
M8 	BU: Blue BN: Brown BK: Black			
				2-wire NC


Setting-up

Minimum mounting distances (mm)


	Side by side	Face to face	Facing a metal object
XS7J	e ≥ 1	e ≥ 6	e ≥ 7.5
XS7F	e ≥ 1	e ≥ 12	e ≥ 15

Dimensions

XS7F



XS7J



(1) LED
(2) For CHC type screws


Inductive proximity sensors

OsiSense XS, general purpose, standard range

Flat format, flush mountable

Two-wire DC

Three-wire DC, solid-state output

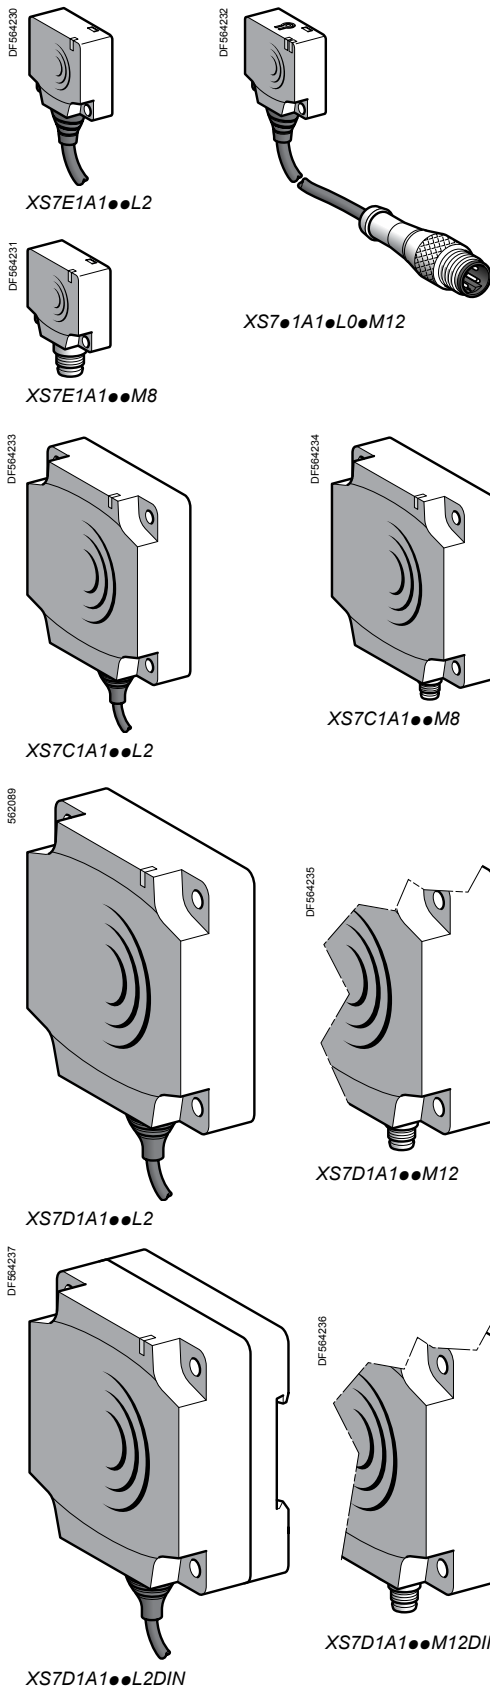

Sens. dist. (Sn) mm	Function	Output	Connection	Reference	Weight kg
Flat, 26 x 26 x 13 mm format ⁽¹⁾					
Three-wire ---					
10	NO	PNP	Pre-cabled (L = 2 m) (4)	XS7E1A1PAL2	0.075
			M8 connector	XS7E1A1PAM8	0.040
			Remote M12 connector	XS7E1A1PAL01M12	0.040
		NPN	Pre-cabled (L = 2 m) (4)	XS7E1A1NAL2	0.075
			M8 connector	XS7E1A1NAM8	0.075
			Remote M12 connector	XS7E1A1NAL01M12	0.040
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7E1A1PBL2	0.075
			M8 connector	XS7E1A1PBM8	0.040
			Remote M12 connector	XS7E1A1PBL01M12	0.040
		NPN	Pre-cabled (L = 2 m) (4)	XS7E1A1NBL2	0.075
			M8 connector	XS7E1A1NBM8	0.040
			Remote M12 connector	XS7E1A1NBL01M12	0.040
Two-wire ---					
10	NO		Pre-cabled (L = 2 m) (4)	XS7E1A1DAL2	0.070
			M8 connector	XS7E1A1DAM8	0.040
			Remote M12 connector	XS7E1A1DAL01M12	0.040
	NO terminals 1 and 4 (2)		Remote M12 connector	XS7E1A1CAL01M12	0.040
			Remote M12 connector (3)	XS7E1A1CAL08M12	0.065
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7E1A1DBL2	0.070
			M8 connector	XS7E1A1DBM8	0.040
			Remote M12 connector	XS7E1A1DBL01M12	0.040
			NPN		
Flat, 40 x 40 x 15 mm format ⁽¹⁾					
Three-wire ---					
15	NO	PNP	Pre-cabled (L = 2 m) (4)	XS7C1A1PAL2	0.095
			M8 connector	XS7C1A1PAM8	0.060
			Remote M12 connector	XS7C1A1PAL01M12	0.060
		NPN	Pre-cabled (L = 2 m) (4)	XS7C1A1NAL2	0.095
			M8 connector	XS7C1A1NAM8	0.060
			Remote M12 connector	XS7C1A1NAL01M12	0.060
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7C1A1PBL2	0.095
			M8 connector	XS7C1A1PBM8	0.060
			Remote M12 connector	XS7C1A1PBL01M12	0.060
		NPN	Pre-cabled (L = 2 m) (4)	XS7C1A1NBL2	0.095
			M8 connector	XS7C1A1NBM8	0.060
			Remote M12 connector	XS7C1A1NBL01M12	0.060
Two-wire ---					
15	NO		Pre-cabled (L = 2 m) (4)	XS7C1A1DAL2	0.090
			M8 connector	XS7C1A1DAM8	0.060
			Remote M12 connector	XS7C1A1DAL01M12	0.060
	NO terminals 1 and 4 (2)		Remote M12 connector	XS7C1A1CAL01M12	0.060
			Remote M12 connector (3)	XS7C1A1CAL08M12	0.090
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7C1A1DBL2	0.090
			M8 connector	XS7C1A1DBM8	0.060
			Remote M12 connector	XS7C1A1DBL01M12	0.060
			NPN		
Flat, 80 x 80 x 26 mm format ⁽¹⁾					
Three-wire ---					
40	NO	PNP	Pre-cabled (L = 2 m) (4)	XS7D1A1PAL2 (5)	0.340
			M12 connector	XS7D1A1PAM12 (5)	0.290
		NPN	Pre-cabled (L = 2 m) (4)	XS7D1A1NAL2 (5)	0.340
			M12 connector	XS7D1A1NAM12 (5)	0.290
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7D1A1PBL2 (5)	0.340
			M12 connector	XS7D1A1PBM12 (5)	0.290
NPN		Pre-cabled (L = 2 m) (4)	XS7D1A1NBL2 (5)	0.340	
		M12 connector	XS7D1A1NBM12 (5)	0.290	
Two-wire ---					
40	NO		Pre-cabled (L = 2 m) (4)	XS7D1A1DAL2 (5)	0.340
			M12 connector	XS7D1A1DAM12 (5)	0.290
	NO terminals 1 and 4 (2)		M12 connector	XS7D1A1CAM12 (5)	0.290
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7D1A1DBL2 (5)	0.340
			M12 connector	XS7D1A1DBM12 (5)	0.290

(1) For accessories, see page 128.

(2) The NO output is connected to terminals 1 and 4 of the M12 connector.

(3) Remote connector on 0.8 m flying lead.

(4) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: **S7 J1A1PAL2** becomes **XS7J1A1PAL5** with a 5 m long cable.

(5) For clipping onto 35 mm omega rail or 80 x 80 x 40 mm format, add DIN to the end of the reference. Example: **XS7D1A1PAL2** becomes **XS7D1A1PAL2DIN**.

Inductive proximity sensors

OsiSense XS, general purpose, standard range

Flat format, flush mountable

Two-wire DC

Three-wire DC, solid-state output

Characteristics			
Sensor type		XS7E●●●●M8, XS7C●●●●M8, XS7D●●●●M12	XS7E●●●●L01M12, XS7C●●●●L01M12
Product certifications		UL, CSA, CE	
Connection	Connector	M8 except M12 on XS7D●●●●M12	M12 on 0.15 m flying lead for XS7●●●●L01M12
	Pre-cabled	—	—
Operating zone	XS7E	mm	0...8
	XS7C	mm	0...12
	XS7D	mm	0...32
Differential travel		%	
Degree of protection		Conforming to IEC 60529	
Storage temperature		°C	
Operating temperature		°C	
Materials	Case	PBT	
	Cable	—	
Vibration resistance		Conforming to IEC 60068-2-6	
Shock resistance		Conforming to IEC 60068-2-27	
Output state indication		Yellow LED	
Rated supply voltage		V	
Voltage limits (including ripple)		V	
Current consumption, no-load		3-wire	
Residual current, open state		2-wire	
Switching capacity		3-wire	
Voltage drop, closed state		2-wire	
Maximum switching frequency		XS7E, XS7C	
Delays		XS7D	
		First-up	
		Response	
		Recovery	



Wiring schemes

Connector	Pre-cabled	PNP/M12 or M8	2-wire NO/M12 or M8	2-wire NC/M12 or M8
M12	BU: Blue BN: Brown BK: Black	BN/1 PNP BK/4 (NO) BK/2 (NC) BU/3	BN/3 NO BU/4	BN/1 NC BU/2 (M12) BU/3 (M8)
M8				
Connector	Pre-cabled	NPN/M12 or M8	2-wire NO/M12 XS7●●●●CA●●●	
M12		BN/1 NPN BK/4 (NO) BK/2 (NC) BU/3	BN/1 NO BU/4	
M8				

Setting-up


Minimum mounting distances (mm)				
Side by side	e ≥	XS7E	XS7C	XS7D
		4	5	40
Face to face	e ≥	XS7E	XS7C	XS7D
		72	110	300
Facing a metal object	e ≥	XS7E	XS7C	XS7D
		30	45	120

Dimensions

	XS7C/D/E				XS7C/D			XS7E
								
					(1) LED (2) For CHC type screws			
Sensor	A (cable)	A (connector)	B	C	D	E	F	
XS7E	14	11	26	13	8.8	20	3.5	
XS7C	14	11	40	15	9.8	33	4.5	
XS7D	23	18	80	26	16	65	5.5	
XS7D●●DIN	23	18	80	40	30	65	5.1	

Inductive proximity sensors

OsiSense XS, general purpose
Cubic case, 40 x 40 x 70 mm, M12 or 1/2"-20UNF
connector
5 position turret head

Sensor			Flush mountable in metal		Non flush mountable in metal	
						
Nominal sensing distance (Sn)			15 mm	20 mm	40 mm	
References						
4-wire ---	PNP	NO+NC	–	XS8C2A1PCM12	XS8C2A4PCM12	
	NPN	NO+NC	–	XS8C2A1NCM12	XS8C2A4NCM12	
3-wire ---	PNP	NO	XS7C2A1PAM12	–	–	
	NPN	NO	XS7C2A1NAM12	–	–	
	PNP	NC	XS7C2A1PBM12	–	–	
	NPN	NC	XS7C2A1NBM12	–	–	
2-wire ---	NO		XS7C2A1DAM12	XS8C2A1DAM12	XS8C2A4DAM12	
	NC		XS7C2A1DBM12	XS8C2A1DBM12	XS8C2A4DBM12	
2-wire (~/---) unprotected (1)	NO		XS7C2A1MAU20	XS8C2A1MAU20	XS8C2A4MAU20	
	NC		XS7C2A1MBU20	XS8C2A1MBU20	XS8C2A4MBU20	
Weight (kg)			0.149	0.149	0.149	
Characteristics						
Operating zone			0...12 mm	0...16 mm	0...32 mm	
Product certifications			UL, CSA, CE, TÜV (4-wire versions)			
Conformity to standards			IEC 60947-5-2			
Conformity to safety standards (2)		For XS8C2A●PCM12	EN 62061 (2005): SILcl2 EN 61508 (2010): SIL 2, EN ISO 13849 (2008): PL d			
Reliability data (2)		For XS8C2A●PCM12	MTTFd = 1546 years PFHd = 7.4 10-8 1/h			
Connection			M12 connector for --- versions 1/2 "-20UNF connector for ~/--- versions			
Differential travel			3...15% of Sr			
Degree of protection		Conforming to IEC 60529 and DIN 40050	IP 65, IP 67 and IP 69K			
Temperature	Storage	- 40...+ 85°C				
	Operation (3)	- 25...+ 70°C				
Material		Case: PBT				
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10...55 Hz)			
Shock resistance		Conforming to IEC 60068-2-27	50 gn for 11 ms			
Indicators		Output state	Yellow LED			
		Power on	Green LED, for 4-wire ---, 3-wire --- and 2-wire ~/--- versions			
Rated supply voltage	4-wire ---		12...48 V with protection against reverse polarity			
	3-wire ---		12...24 V with protection against reverse polarity			
	2-wire ---		12...48 V with protection against reverse polarity			
	2-wire ~/---		24...240 V (~ 50/60 Hz)			
Voltage limits (including ripple)	4-wire ---		10...58 V			
	3-wire ---		10...36 V			
	2-wire ---		10...58 V			
	2-wire ~/---		20...264 V			
Current consumption, no-load		3-wire and 4-wire ---	< 15 mA			
Residual current, open state	2-wire ---		< 0.6 mA			
	2-wire ~/---		1.5 mA			
Switching capacity	3-wire and 4-wire ---		< 200 mA with overload and short-circuit protection			
	2-wire ---		< 100 mA with overload and short-circuit protection			
	2-wire ~/---		~: 5...300 mA (1) ---: 5...200 mA (1)			
Voltage drop, closed state	3-wire and 4-wire ---		< 2 V			
	2-wire ---		< 4.2 V			
	2-wire ---/~		< 5.5 V			
Maximum switching frequency			Flush mountable: --- 300 Hz, ~ 25 Hz Non flush mountable: --- 150 Hz, ~ 25 Hz			
Delays	First-up		7 ms (3-wire and 4-wire ---), 20 ms (2-wire --- and 2-wire ---/~)			
	Response		Flush mountable: ≤ 1.2 ms. Non flush mountable: ≤ 1.4 ms			
	Recovery		Flush mountable: ≤ 1.8 ms. Non flush mountable: ≤ 3.5 ms			

(1) Sensor must be protected by a 0.4 A quick-blow fuse (reference **XUZ E04**) connected in series with the load (see page 128).

(2) SIL 2 protection can only be obtained by connecting both outputs to a safety PLC. Please refer to the "Safety solutions using Preventa" catalogue.

(3) Sensors are available for very low temperatures (suffix **TF**: - 40°C, + 70°C) or very high temperatures (suffix **TT**: - 25°C, + 85°C). Please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS, general purpose

Cubic case, 40 x 40 x 70 mm, M12 or 1/2"-20UNF connector

5 position turret head



Setting-up precautions

Minimum mounting distances (mm)


		Side by side	Face to face	Facing a metal object
Sensors flush mountable in metal	XS7C2A1●●	$e \geq 60$	$e \geq 120$	$e \geq 45$
	XS8C2A1●●	$e \geq 80$	$e \geq 160$	$e \geq 60$
Sensors non flush mountable in metal	XS8C2A4●●	$e \geq 160$	$e \geq 320$	$e \geq 120$

Wiring schemes


4-wire ---, NO + NC outputs




2-wire ---, NO output
(M12 connector)




2-wire ---, NC output
(M12 connector)




3-wire, PNP




M12 connector




3-wire, NPN



1/2"-20UNF connector




2-wire, 1/2"-20UNF




Accessory references

Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin, zinc die-cast, nickel plated clamping ring	Straight	2	XZCP1141L2	0.090
		5	XZCP1141L5	0.190
		10	XZCP1141L10	0.370
	Elbowed	2	XZCP1241L2	0.090
		5	XZCP1241L5	0.190
		10	XZCP1241L10	0.370
Pre-wired 1/2"-20UNF connectors Female, 3-pin, zinc die-cast, nickel plated clamping ring	Straight	5	XZCP1865L5	0.180
		10	XZCP1865L10	0.350
	Elbowed	5	XZCP1965L5	0.180
		10	XZCP1965L10	0.350

Dimensions

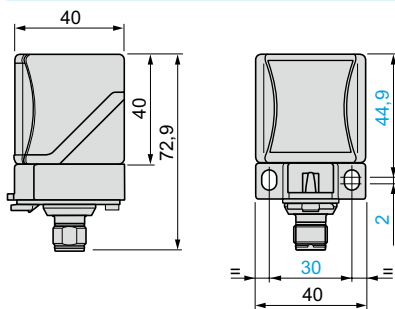


Head positions

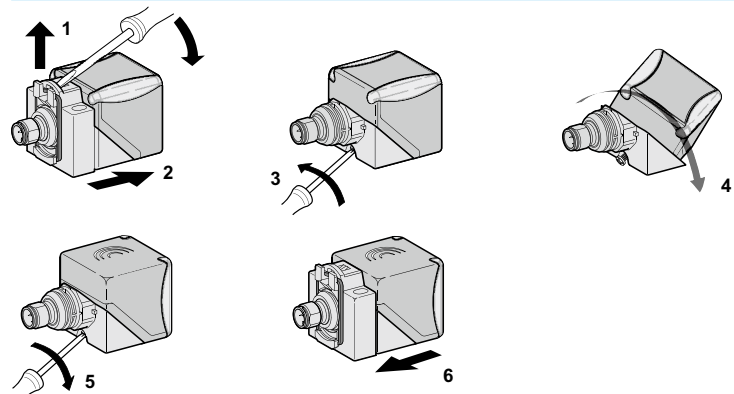

Example SIL 2 wiring scheme (with Preventa XPS MF40 safety PLC)

+ 24 V

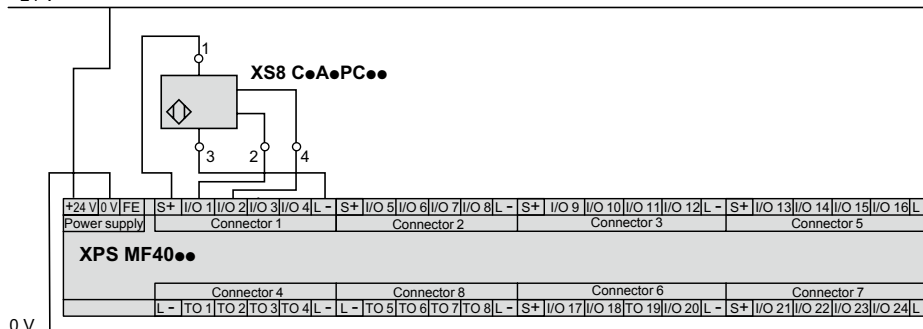

SFF (Safe Failure Fraction): 92,68 %
DC (Diagnosis Coverage): 75,8 %

S+: 24 V
L-: 0 V
I/O 1...24: safety I/O


Inductive proximity sensors

OsiSense XS, general purpose

Plastic case, 40 x 40 x 117 mm, plug-in

5 position turret head

Sensor	Flush mountable in metal	Non flush mountable in metal
--------	--------------------------	------------------------------



Nominal sensing distance (Sn)		15 mm	20 mm	40 mm	
References					
4-wire 	PNP	NO+NC	—	XS8C4A1PCP20	XS8C4A4PCP20
	NPN	NO+NC	—	XS8C4A1NCP20	XS8C4A4NCP20
2-wire 	NO or NC programmable		XS7C4A1DPP20	XS8C4A1DPP20	XS8C4A4DPP20
2-wire () unprotected (1)	NO or NC programmable		XS7C4A1MPP20	XS8C4A1MPP20	XS8C4A4MPP20
Weight (kg)		0.244	0.244	0.244	

Note: These sensors have an M20 cable entry. They can also be supplied with a PG 13.5 cable entry (e.g. XS8C4A4PCG13) or a 1/2" NPT cable entry (e.g. XS8C4A1MPN12). Please consult our Customer Care Centre.

Characteristics				
Operating zone		0...12 mm	0...16 mm	0...32 mm
Product certifications		UL, CSA, CE, TÜV (4-wire versions)		
Conformity to standards		IEC 60947-5-2		
Conformity to safety standards (2)	For XS8C4A●PCP20	EN 62061 (2005): SILcl2, EN 61508 (2010): SIL 2, EN ISO 13849 (2008): PL d		
Reliability data (2)	For XS8C4A●PCP20	MTTFd = 1546 years PFHd = 7.4 10-8 1/h		
Connection		Screw terminals, clamping capacity: 2 or 4 x 1.5 mm2 (3)		
Differential travel		3...15% of Sr		
Degree of protection	Conforming to IEC 60529 and DIN 40050	IP 65, IP 67 and IP 69K		
Temperature	Storage	- 40...+ 85°C		
	Operation (4)	- 25...+ 70°C		
Material		Case: PBT		
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10...55 Hz)		
Shock resistance	Conforming to IEC 60068-2-27	50 gn for 11 ms		
Indicators	Output state	Yellow LED		
	Power on	Green LED, for 4-wire --- and 2-wire ~/- versions		
Rated supply voltage	4-wire ---	12...48 V with protection against reverse polarity		
	2-wire ---	12...48 V with protection against reverse polarity		
	2-wire ~/-	24...240 V (~ 50/60 Hz)		
Voltage limits (including ripple)	4-wire ---	10...58 V		
	2-wire ---	10...58 V		
	2-wire ~/-	20...264 V		
Current consumption, no-load	4-wire ---	< 15 mA		
Residual current, open state	2-wire ---	< 0.6 mA		
	2-wire ~/-	1.5 mA		
Switching capacity	4-wire ---	< 200 mA with overload and short-circuit protection		
	2-wire ---	< 100 mA with overload and short-circuit protection		
	2-wire ~/-	~: 5...300 mA (1) ---: 5...200 mA (1)		
Voltage drop, closed state	4-wire ---	< 2 V		
	2-wire ---	< 4.2 V		
	2-wire ---/~	< 5.5 V		
Maximum switching frequency		Flush mountable: --- 300 Hz, ~ 25 Hz Non flush mountable: --- 150 Hz, ~ 25 Hz		
Delays	First-up	7 ms (3-wire and 4-wire ---), 20 ms (2-wire --- and 2-wire ~/-/~)		
	Response	Flush mountable: ≤ 1.2 ms. Non flush mountable: ≤ 1.4 ms		
	Recovery	Flush mountable: ≤ 1.8 ms. Non flush mountable: ≤ 3.5 ms		

(1) Sensor must be protected by a 0.4 A quick-blow fuse (reference **XUZ E04**) connected in series with the load (see page 128).

(2) SIL 2 protection can only be obtained by connecting both outputs to a safety PLC. Please refer to the "Safety solutions using Preventa" catalogue.

(3) These sensors are supplied without a cable gland. An adaptable PG 13.5 cable gland is available (reference **XSZ PE13**). Accessories are available for connection to an M12 or 7/8"-16UN connector which can be added to the PG 13.5 sensor. Please consult our Customer Care Centre.

(4) Sensors are available for very low temperatures (suffix **TF**: - 40°C, + 70°C) or very high temperatures (suffix **TT**: - 25°C, + 85°C). Please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS, general purpose
Plastic case, 40 x 40 x 117 mm, plug-in
5 position turret head

Setting-up precautions


Minimum mounting distances (mm)

		Side by side	Face to face	Facing a metal object
Sensors flush mountable in metal	XS7C4A1●●	$e \geq 60$	$e \geq 120$	$e \geq 45$
	XS8C4A1●●	$e \geq 80$	$e \geq 160$	$e \geq 60$
Sensors non flush mountable in metal	XS8C4A4●●	$e \geq 160$	$e \geq 320$	$e \geq 120$


Wiring schemes

NO + NC outputs


4-wire ---




NO or NC outputs, depending on position of link




2-wire --- (non polarised)



2-wire ~ or --- (programmable)




Dimensions

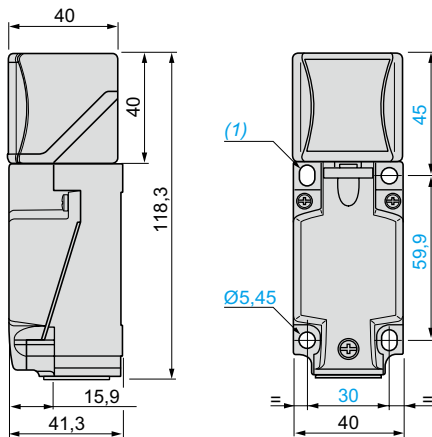

(1) 2 elongated holes $\emptyset 5.3 \times 7$ cm.


Tightening torque of cover fixing screws and clamp screws: < 1.2 Nm

Head positions

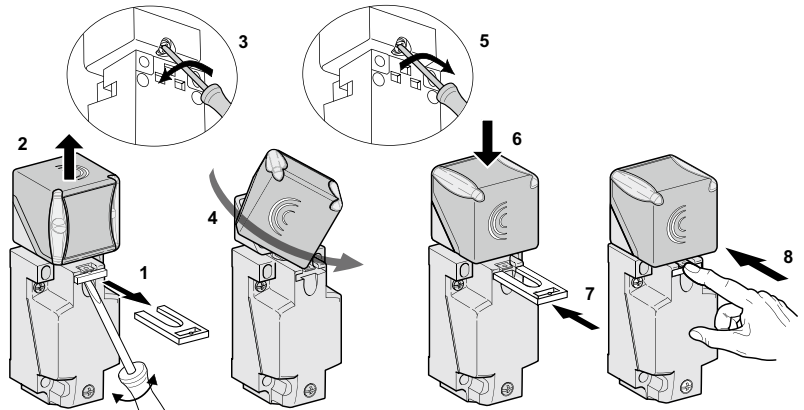

Example SIL 2 wiring scheme (with Preventa XPS MF40 safety PLC)

+ 24 V

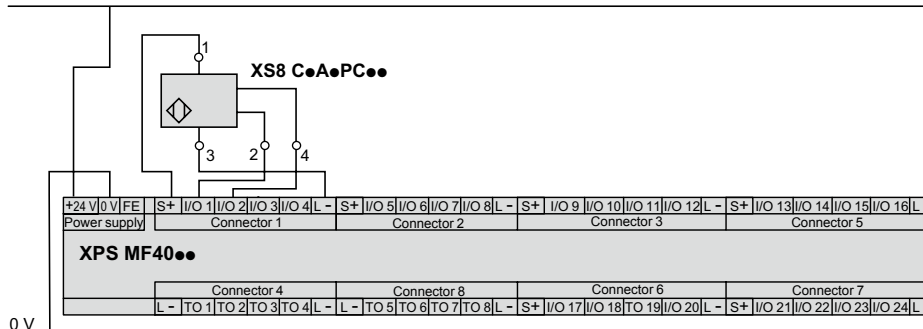

SFF (Safe Failure Fraction): 92,68 %
DC (Diagnosis Coverage): 75,8 %

S+: 24 V
L-: 0 V
I/O 1...24: safety I/O

Inductive proximity sensors



OsiSense XS, general purpose

Plastic case, 40 x 40 x 117 format, plug-in

5 position turret head

DC supply

Sensor	Flush mountable in metal			Non flush mountable in metal		
--------	--------------------------	--	--	------------------------------	--	--



Nominal sensing distance (Sn)	15 mm	Increased range 20 mm	15 mm	20 mm	Increased range 40 mm	20 mm
-------------------------------	-------	--------------------------	-------	-------	--------------------------	-------

References							
4-wire $\overline{\text{---}}$ (complementary outputs)	PNP NO + NC	XS7C40PC440	XS7C40PC449	–	XS8C40PC440	XS8C40PC449	–
	NPN NO + NC	XS7C40NC440	XS7C40NC449	–	XS8C40NC440	XS8C40NC449	–
2-wire $\overline{\text{---}}$ (non polarised)	NO	–	–	XS7C40DA210	–	–	XS8C40DA210
	NO or NC programmable	–	–	XS7C40DP210	–	–	XS8C40DP210
Weight (kg)	0.220	0.220	0.220	0.220	0.220	0.220	0.220

Characteristics							
Product certifications		UL, CSA, CE					
Degree of protection conforming to IEC 60529		IP 67					
Operating temperature		- 25...+ 70 °C					
Connection		Screw terminals, clamping capacity: 2 or 4 x 1.5 mm² (1)					
Operating zone		0...12 mm	0...16 mm	0...12 mm	0...16 mm	0...32 mm	0...16 mm
Repeat accuracy		≤ 3 % of effective sensing distance (Sr)					
Differential travel		3...20 % of effective sensing distance (Sr)					
Status indication	Output	Yellow LED		Yellow LED	Yellow LED		Yellow LED
	Supply on	Green LED		–	Green LED		–
Rated supply voltage		⎓ 12...48 V with protection against reverse polarity					
Voltage limits (including ripple)		⎓ 10...58 V					
Current consumption, no-load		≤ 10 mA		–	≤ 10 mA		–
Switching capacity		0...200 mA		1.5...100 mA	0...200 mA		1.5...100 mA
		With overload and short-circuit protection					
Residual current, open state		–		≤ 0.5 mA	–		≤ 0.5 mA
Voltage drop, closed state		≤ 2 V		≤ 4 V	≤ 2 V		≤ 4 V
Maximum switching frequency		1000 Hz		1500 Hz	1000 Hz	500 Hz	800 Hz
Delays	First-up	≤ 5 ms		≤ 5 ms	≤ 5 ms	≤ 5 ms	≤ 5 ms
	Response	≤ 0.3 ms		≤ 2 ms	≤ 0.3 ms	< 1 ms	≤ 2 ms
	Recovery	≤ 0.7 ms		≤ 5 ms	≤ 0.7 ms	< 1 ms	≤ 7 ms

(1) Cable gland not included with sensor. For suitable 13P cable gland (XSZPE13), see page 128.

Inductive proximity sensors

OsiSense XS, general purpose

Plastic case, 40 x 40 x 117 format, plug-in


5 position turret head

DC supply

Dimensions

XS7C40D●210, XS8C40D●210

XS7C40●C44●, XS8C40●C44●

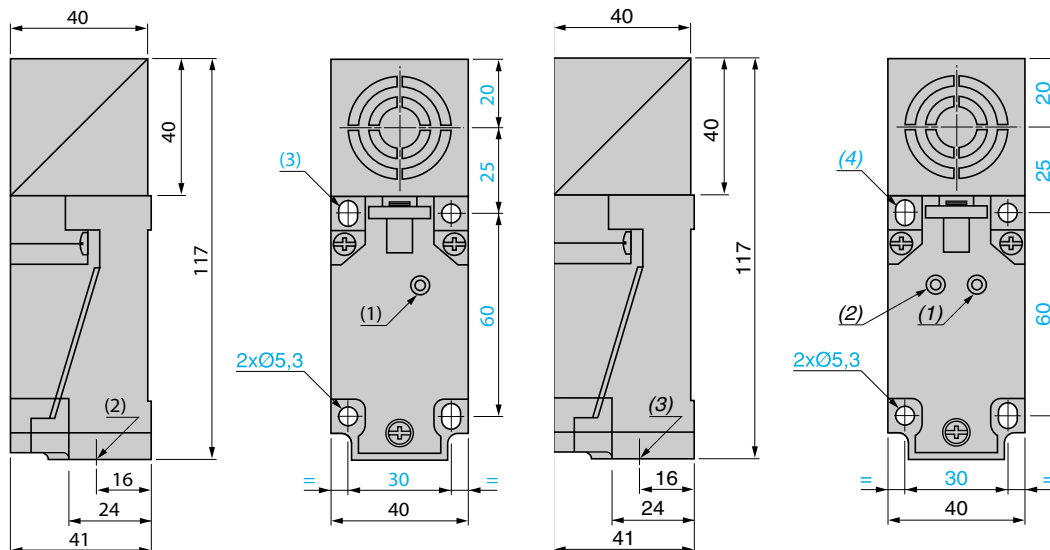

(1) Output LED.

(2) 1 tapped entry for 13P cable gland.

(3) 2 elongated holes Ø 5.3 x 7.

(1) Output LED.


(2) Supply LED.

(3) 1 tapped entry for 13P cable gland.

(4) 2 elongated holes Ø 5.3 x 7.

Setting-up

Minimum mounting distances (mm)







		Side by side	Face to face	Facing a metal object
Sensors flush mountable in metal	XS7	$e \geq 40$	$e \geq 120$	$e \geq 45$
	XS7 increased range model	$e \geq 80$	$e \geq 240$	$e \geq 60$
Sensors non flush mountable in metal	XS8	$e \geq 80$	$e \geq 160$	$e \geq 60$
	XS8 increased range model	$e \geq 160$	$e \geq 320$	$e \geq 120$

Tightening torque of cover fixing screws and clamp screws: < 1.2 N.m

Wiring schemes

2-wire $\square$ (non polarised), NO or NC output depending on position of link

4-wire $\square$, NO + NC output





Inductive proximity sensors

OsiSense XS, general purpose

Plastic case, 40 x 40 x 117 format, plug-in

5 position turret head

AC or DC supply

Sensor		Flush mountable in metal		Non flush mountable in metal	
					
		AC	AC/DC	AC	AC/DC
Nominal sensing distance (Sn)		15 mm		20 mm	
References					
2-wire ~	NO or NC programmable	XS7C40FP260	–	XS8C40FP260	–
2-wire ~ or ~ universal model	NO or NC programmable	–	XS7C40MP230	–	XS8C40MP230
Weight (kg)		0.220	0.220	0.220	0.220
Characteristics					
Product certifications		UL, CSA, CE			
Degree of protection conforming to IEC 60529		IP 67			
Operating temperature		- 25...+ 70 °C			
Connection		Screw terminals, clamping capacity 2 x 1.5 mm² (1)			
Operating zone		0...12 mm		0...16 mm	
Repeat accuracy		≤ 3 % of effective sensing distance (Sr)			
Differential travel		3...20 % of effective sensing distance (Sr)			
Output state indication		Yellow LED			
Rated supply voltage with protection against reverse polarity		~ 24...240 V, 50/60 Hz	~ 24...240 V, 50/60 Hz or ~ 24...210 V	~ 24...240 V, 50/60 Hz	~ 24...240 V, 50/60 Hz or ~ 24...210 V
Voltage limits (including ripple)		~ 20...264 V	~ or ~ 20...264 V	~ 20...264 V	~ or ~ 20...264 V
Current consumption, no-load		–			
Switching capacity		5...500 mA (2) (2 A inrush)	~ 5...300 mA or ~ 5...200 mA (2)	5...500 mA (2) (2 A inrush)	~ 5...300 mA or ~ 5...200 mA (2)
Residual current, open state		≤ 1.5 mA	0.8 mA on 24 V 1.5 mA on 120 V	≤ 1.5 mA	0.8 mA on 24 V 1.5 mA on 120 V
Voltage drop, closed state		≤ 5.5 V			
Maximum switching frequency		25 Hz	~ 25 Hz, ~ 50 Hz	25 Hz	~ 25 Hz, ~ 50 Hz
Delays	First-up	≤ 120 ms			
	Response	≤ 30 ms			
	Recovery	≤ 20 ms			

(1) Cable gland not included with sensor. For suitable 13P cable gland (XSZPE13), see page 128.

(2) These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a "quick-blow" fuse in series with the load, see page 128.

Inductive proximity sensors

OsiSense XS, general purpose


Plastic case, 40 x 40 x 117 format, plug-in

5 position turret head

AC or DC supply

Dimensions

XS7C40FP260, XS7C40MP230, XS8C40FP260, XS8C40MP230

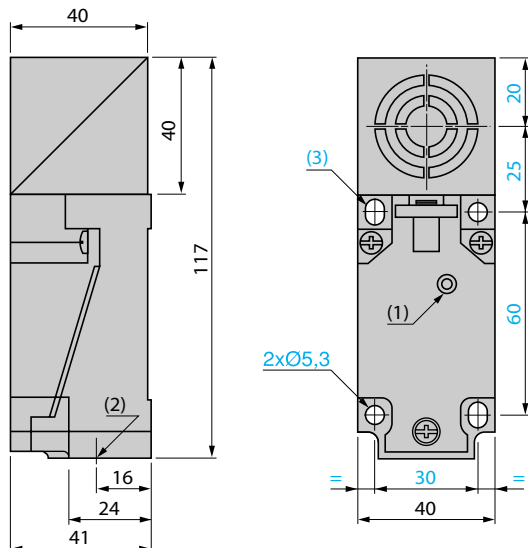




(1) Output LED.

(2) 1 tapped entry for 13P cable gland.

(3) 2 elongated holes Ø 5.3 x 7.

Setting-up

Minimum mounting distances (mm)







	Side by side	Face to face	Facing a metal object
XS7 flush mountable	$e \geq 40$	$e \geq 120$	$e \geq 45$
XS8 non flush mountable	$e \geq 80$	$e \geq 160$	$e \geq 60$

Tightening torque of cover fixing screws and clamp screws: < 1.2 N.m

Wiring schemes

2-wire ~ programmable, NO or NC output depending on position of link

2-wire ~ or 24VDC programmable, NO or NC output depending on position of link








Inductive proximity sensors

OsiSense XS Application

For conveying and material handling applications
Plastic case, cubic 40 form, multiposition
DC supply

Sensor	Flush mountable in metal	Non flush mountable in metal
--------	--------------------------	------------------------------



Nominal sensing distance (Sn)	15 mm	20 mm
-------------------------------	-------	-------

References								
2-wire $\overline{VCC}$ (non polarised)	NO	XS7T4DA210	–	XS7T4DA214LD	–	XS7T4DA214LD01	–	–
4-wire $\overline{VCC}$ (complementary outputs)	PNP NO + NC	–	XS7T4PC440	–	XS7T4PC440LD	–	XS8T4PC440	XS8T4PC440LD
	NPN NO + NC	–	XS7T4NC440	–	XS7T4NC440LD	–	XS8T4NC440	XS8T4NC440LD
Weight (kg)		0.265	0.265	0.220	0.220	0.200	0.265	0.220

Characteristics							
Product certifications		UL, CSA, CE					
Degree of protection Conforming to IEC 60529		IP 67					
Operating temperature		- 25...+ 70 °C					
Connection	Pre-cabled	2 x 0.5 mm ² length 2 m (1)	4 x 0.34 mm ² length 2 m (1)	–		4 x 0.34 mm ² length 2 m (1)	–
	Connector Remote M12	–		0.8 m flying lead	0.15 m flying lead	–	0.8 m flying lead
Operating zone		0...12 mm				0...16 mm	
Repeat accuracy		≤ 3 % of Sr (effective sensing distance)					
Differential travel		3...20 % of Sr (effective sensing distance)					
Output state indication		Yellow LED, on rear					
Rated supply voltage		--- 12...48 V with protection against reverse polarity					
Voltage limits (including ripple)		--- 10...58 V					
Current consumption, no-load		–	≤ 10 mA	–	≤ 10 mA	–	≤ 10 mA
Switching capacity		1.5...100 mA	0...200 mA	1.5...100 mA	0...200 mA	1.5...100 mA	0...200 mA
		With overload and short-circuit protection					
Residual current, open state		≤ 0.7 mA	≤ 0.1 mA	≤ 0.7 mA	≤ 0.1 mA	≤ 0.7 mA	≤ 0.1 mA
Voltage drop, closed state		≤ 5.2 V	≤ 2 V	≤ 5.2 V	≤ 2 V	≤ 5.2 V	≤ 2 V
Maximum switching frequency		150 Hz	1000 Hz	150 Hz	1000 Hz	150 Hz	1000 Hz
Delays	First-up	≤ 5 ms	≤ 7 ms	≤ 5 ms	≤ 7 ms	≤ 5 ms	≤ 7 ms
	Response	≤ 2 ms	≤ 0.3 ms	≤ 2 ms	≤ 0.3 ms	≤ 2 ms	≤ 0.3 ms
	Recovery	≤ 5 ms	≤ 0.7 ms	≤ 5 ms	≤ 0.7 ms	≤ 5 ms	≤ 0.7 ms

(1) Sensors available with other cable lengths:

Length of cable	Suffix to be added to references stated above for 2 m pre-cabled sensors	Weight increase
5 m	L1	0.120 kg
10 m	L2	0.320 kg

Example: sensor XS7T4DA210 with 5 m cable becomes XS7T4DA210L1

Other versions Sensors specifically designed for other operating temperatures. Please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS Application

For conveying and material handling applications

Plastic case, cubic 40 form, multiposition


DC supply

Dimensions

XS•T4•••••, XS•T4•••••LD, XS7T4•••••LD01


Plate mounted

Bracket mounted

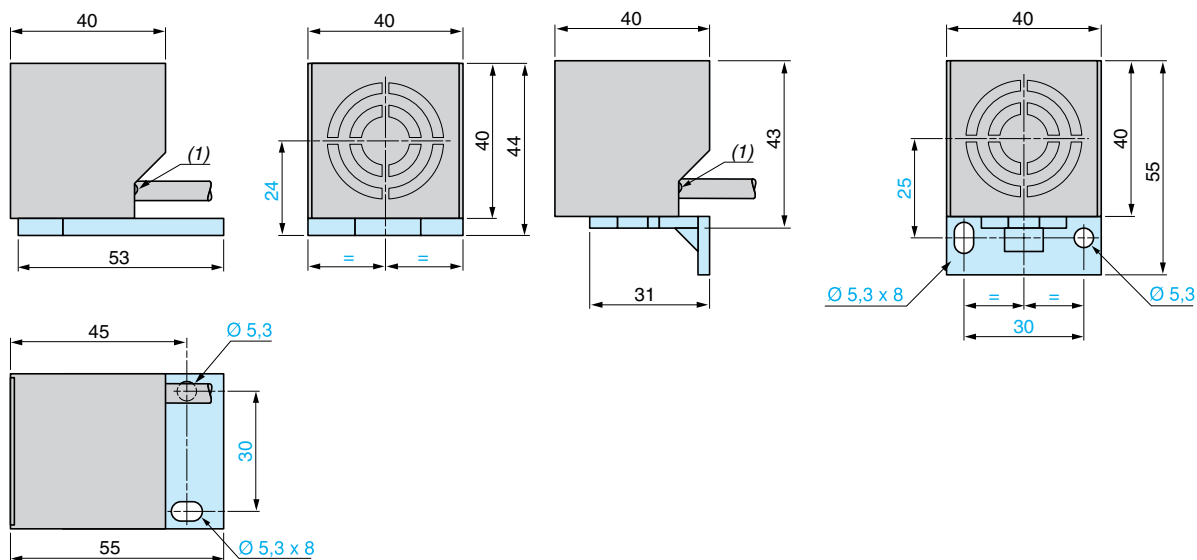


(1) LED.

Alternative positions of head

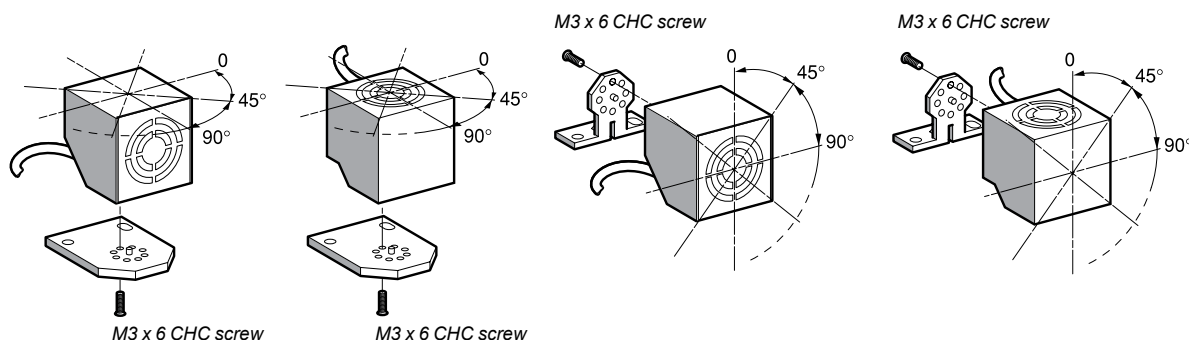

Setting-up

Minimum mounting distances (mm)



Sensors flush mountable in metal

XS7T, 2-wire

XS7T, 4-wire

Sensors non flush mountable in metal

XS8T, 4-wire

Side by side

$e \geq 40$

$e \geq 40$

$e \geq 60$

Face to face

$e \geq 120$

$e \geq 120$

$e \geq 160$

Facing a metal object

$e \geq 45$

$e \geq 45$

$e \geq 60$

Wiring schemes

Connector




Pre-cabled

2-wire $\overline{\text{---}}$, NO output

4-wire $\overline{\text{---}}$, NO + NC output



BU: Blue
BN: Brown
BK: Black
WH: White




Inductive proximity sensors


OsiSense XS, general purpose

Multivoltage sensor, cylindrical, flush mountable and non flush mountable


Two-wire AC or DC, short-circuit protection




XS1M●●●●250




XS2M●●●●250



XS1M●●●●250K



XS2M●●●●250K



XSZB1●●

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 12, threaded M12 x 1				
Flush mountable				
2	NO	Pre-cabled (L = 2 m) (1)	XS1M12MA250	0.075
		1/2"-20UNF connector	XS1M12MA250K	0.025
	NC	Pre-cabled (L = 2 m) (1)	XS1M12MB250	0.075
		1/2"-20UNF connector	XS1M12MB250K	0.025
Non flush mountable				
4	NO	Pre-cabled (L = 2 m) (1)	XS2M12MA250	0.075
		1/2"-20UNF connector	XS2M12MA250K	0.025
	NC	Pre-cabled (L = 2 m) (1)	XS2M12MB250	0.075
Ø 18, threaded M18 x 1				
Flush mountable				
5	NO	Pre-cabled (L = 2 m) (1)	XS1M18MA250	0.120
		1/2"-20UNF connector	XS1M18MA250K	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS1M18MB250	0.120
		1/2"-20UNF connector	XS1M18MB250K	0.060
Non flush mountable				
8	NO	Pre-cabled (L = 2 m) (1)	XS2M18MA250	0.120
		1/2"-20UNF connector	XS2M18MA250K	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS2M18MB250	0.120
		1/2"-20UNF connector	XS2M18MB250K	0.060
Ø 30, threaded M30 x 1.5				
Flush mountable				
10	NO	Pre-cabled (L = 2 m) (1)	XS1M30MA250	0.205
		1/2"-20UNF connector	XS1M30MA250K	0.145
	NC	Pre-cabled (L = 2 m) (1)	XS1M30MB250	0.205
		1/2"-20UNF connector	XS1M30MB250K	0.145
Non flush mountable				
15	NO	Pre-cabled (L = 2 m) (1)	XS2M30MA250	0.205
		1/2"-20UNF connector	XS2M30MA250K	0.145
	NC	Pre-cabled (L = 2 m) (1)	XS2M30MB250	0.205
		1/2"-20UNF connector	XS2M30MB250K	0.145
Accessories (2)				
Description mm		Reference	Weight kg	
Fixing clamps	Ø 12	XSZB112	0.006	
	Ø 18	XSZB118	0.010	
	Ø 30	XSZB130	0.020	

(1) For a 5 m long cable add L1 to the reference; for a 10 m long cable add L2 to the reference.

Example: XS1M18MA250 becomes XS1M18MA250L1 with a 5 m long cable.

(2) For further information, see page 128.

Inductive proximity sensors



OsiSense XS, general purpose

Multivoltage sensor, cylindrical, flush mountable and non flush mountable

Two-wire AC or DC, short-circuit protection

Characteristics						
Sensor type			XS●M●●M●250K		XS●M●●M●250	
Product certifications			UL, CSA, CE			
Connection			1/2"-20UNF connector		Pre-cabled, length: 2 m	
Operating zone	Ø 12 flush mountable	mm	0...1.6			
	Ø 12 non flush mountable	mm	0...3.2			
	Ø 18 flush mountable	mm	0...4			
	Ø 18 non flush mountable	mm	0...6.4			
	Ø 30 flush mountable	mm	0...8			
	Ø 30 non flush mountable	mm	0...12			
Differential travel			%	1...15 of effective sensing distance (Sr)		
Degree of protection		Conforming to IEC 60529	IP 67		IP 68, double insulation	
Storage temperature			°C			- 40...+ 85
Operating temperature			°C			- 25...+ 70
Materials	Case	Nickel plated brass				
	Cable	-		PvR 2 x 0.34 mm ²		
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms			
Indicators	Output state	Yellow LED, 4 viewing ports at 90°		Yellow LED		
	Supply on	-		Green LED (only on Ø 18 and Ø 30)		
Rated supply voltage			V	~ 24...240 (50/60 Hz) or - 24...210		
Voltage limits (including ripple)			V	~ or - 20...264		
Switching capacity			mA	~ 5...300 or - 5...200 (except Ø 12: ~ or - 5...200) with overload and short-circuit protection		
Voltage drop, closed state			V	≤ 5.5		
Current consumption, no-load			mA	-		
Residual current, open state			mA	≤ 1.5		
Maximum switching frequency	Ø 12	Hz	~ 25 or - 4000			
	Ø 18	Hz	~ 25 or - 2000			
	Ø 30 flush mountable	Hz	~ 25 or - 2000			
	Ø 30 non flush mountable	Hz	~ 25 or - 1000			
Delays	First-up	ms	≤ 70			
	Response	ms	≤ 0.2 for Ø 12, ≤ 2 for Ø 18 and Ø 30			
	Recovery	ms	≤ 0.2 for Ø 12, ≤ 4 for Ø 18, ≤ 5 for Ø 30 flush mountable, ≤ 10 for Ø 30 non flush mountable			

Wiring schemes

1/2"-20UNF connector	Pre-cabled	2-wire ~ or -
	BU: Blue BN: Brown	NO or NC output 

Setting-up

Sensor	Minimum mounting distances (mm)			
	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 12 flush mountable	e ≥ 4	e ≥ 24	e ≥ 6	d ≥ 12 h ≥ 0
Ø 12 non flush mountable	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36 h ≥ 8
Ø 18 flush mountable	e ≥ 10	e ≥ 60	e ≥ 15	d ≥ 18 h ≥ 0
Ø 18 non flush mountable	e ≥ 16	e ≥ 96	e ≥ 24	d ≥ 54 h ≥ 16
Ø 30 flush mountable	e ≥ 20	e ≥ 120	e ≥ 30	d ≥ 30 h ≥ 0
Ø 30 non flush mountable	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90 h ≥ 30

Dimensions


Sensor	Flush mountable in metal					Non flush mountable in metal				
	Pre-cabled		Connector		c	Pre-cabled		Connector		c
	a	b	a	b		a	b	a	b	
Ø 12	55	47	66	48	5	55	42	66	42	5
Ø 18	60	51	72	51	8	60	44	72	44	8
Ø 30	60	51	72	51	13	63	41	75	41	13

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, metal and plastic, flush mountable and non flush mountable


Four-wire DC, solid-state NO + NC output




XS1L06C410




XS1C410




XS2C410



XS1N18C410D



XS2N30C410D



XSZB1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 6.5 plain					
Stainless steel case, flush mountable					
1.5	NO + NC	PNP	Pre-cabled (L = 2 m) (1)	XS1L06PC410	0.025
		NPN	Pre-cabled (L = 2 m) (1)	XS1L06NC410	0.025

Ø 8, threaded M8 x 1					
Stainless steel case, flush mountable					
1.5	NO + NC	PNP	Pre-cabled (L = 2 m)	XS1M08PC410	0.035
			M12 connector	XS1M08PC410D	0.025
	NPN	Pre-cabled (L = 2 m)	XS1M08NC410	0.035	
		M12 connector	XS1M08NC410D	0.025	
Stainless steel case, non flush mountable					
2.5	NO + NC	PNP	Pre-cabled (L = 2 m)	XS2M08PC410	0.035
			M12 connector	XS2M08PC410D	0.025
	NPN	Pre-cabled (L = 2 m)	XS2M08NC410	0.035	
		M12 connector	XS2M08NC410D	0.025	

Ø 12, threaded M12 x 1					
Brass case, flush mountable					
2	NO + NC	PNP	Pre-cabled (L = 2 m) (1)	XS1N12PC410	0.070
			M12 connector	XS1N12PC410D	0.020
	NPN	Pre-cabled (L = 2 m) (1)	XS1N12NC410	0.070	
		M12 connector	XS1N12NC410D	0.020	
Brass case, non flush mountable (2)					
4	NO + NC	PNP	Pre-cabled (L = 2 m) (1)	XS2N12PC410	0.070
			M12 connector	XS2N12PC410D	0.020
	NPN	Pre-cabled (L = 2 m) (1)	XS2N12NC410	0.070	
		M12 connector	XS2N12NC410D	0.020	

Ø 18, threaded M18 x 1					
Brass case, flush mountable					
5	NO + NC	PNP	Pre-cabled (L = 2 m) (1)	XS1N18PC410	0.100
			M12 connector	XS1N18PC410D	0.040
	NPN	Pre-cabled (L = 2 m) (1)	XS1N18NC410	0.100	
		M12 connector	XS1N18NC410D	0.040	
Brass case, non flush mountable (2)					
8	NO + NC	PNP	Pre-cabled (L = 2 m) (1)	XS2N18PC410	0.100
			M12 connector	XS2N18PC410D	0.040
	NPN	Pre-cabled (L = 2 m) (1)	XS2N18NC410	0.100	
		M12 connector	XS2N18NC410D	0.040	

Ø 30, threaded M30 x 1.5					
Brass case, flush mountable					
10	NO + NC	PNP	Pre-cabled (L = 2 m) (1)	XS1N30PC410	0.160
			M12 connector	XS1N30PC410D	0.100
	NPN	Pre-cabled (L = 2 m) (1)	XS1N30NC410	0.160	
		M12 connector	XS1N30NC410D	0.100	
Brass case, non flush mountable (2)					
15	NO + NC	PNP	Pre-cabled (L = 2 m) (1)	XS2N30PC410	0.160
			M12 connector	XS2N30PC410D	0.100
	NPN	Pre-cabled (L = 2 m) (1)	XS2N30NC410	0.160	
		M12 connector	XS2N30NC410D	0.100	

Accessories (3)			
Description mm		Reference	Weight kg
Fixing clamps	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable add L1 to the reference; for a 10 m long cable add L2 to the reference.
Example: **XS1N12PC410** becomes **XS1N12PC410L1** with a 5 m long cable.

(2) For a sensor with a plastic case, non flush mountable, replace 2N by 4P in the reference.
Example: **XS2N12PC410** becomes **XS4P12PC410** with a plastic case.

(3) For further information, see page 128.

Inductive proximity sensors



OsiSense XS, general purpose

Cylindrical, metal and plastic, flush mountable and non flush mountable

Four-wire DC, solid-state NO + NC output

Characteristics				
Sensor type		XS.....C410D		XS.....C410
Product certifications		UL, CSA, CE		
Connection		M12 connector		Pre-cabled, length: 2 m
Operating zone	Ø 6.5 and Ø 8 flush mtable	mm	0...1.2	
	Ø 8 non flush mountable	mm	0...2	
	Ø 12 flush mountable	mm	0...1.6	
	Ø 12 non flush mountable	mm	0...3.2	
	Ø 18 flush mountable	mm	0...4	
	Ø 18 non flush mountable	mm	0...6.4	
	Ø 30 flush mountable	mm	0...8	
	Ø 30 non flush mountable	mm	0...12	
Differential travel		%	1...15 of effective sensing distance (Sr)	
Degree of protection		Conforming to IEC 60529	IP 67	IP 68, double insulation (except Ø 6.5 and Ø 8: IP 67)
Storage temperature		°C	- 40...+ 85	
Operating temperature		°C	- 25...+ 70	
Materials	Case		Nickel plated brass for XS1N and XS2N Stainless steel, grade 303, for XS1L06, XS1M08 and XS2M08 Plastic, PPS, for XS4P	
	Cable		—	PvR 4 x 0.34 mm ² except Ø 6.5 and 8: 4 x 0.08 mm ²
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication			Yellow LED, 4 viewing ports at 90°	Yellow LED, annular
Rated supply voltage		V	12...24 with protection against reverse polarity	
Voltage limits (including ripple)		V	10...36	
Switching capacity		mA	≤ 200 with overload and short-circuit protection	
Voltage drop, closed state		V	≤ 2	
Current consumption, no-load		mA	≤ 10	
Maximum switching frequency	Ø 6.5, Ø 8 and Ø 12	Hz	5000	
	Ø 18	Hz	2000	
	Ø 30	Hz	1000	
		ms	1000	
Delays	First-up	ms	≤ 5	
	Response	ms	≤ 0.1 for Ø 8 and Ø 12, ≤ 0.15 for Ø 18, ≤ 0.3 for Ø 30	
	Recovery	ms	≤ 0.1 for Ø 8 and Ø 12, ≤ 0.35 for Ø 18, ≤ 0.7 for Ø 30	

Wiring schemes

M12 connector	Pre-cabled	PNP 4-wire	NPN 4-wire
	BU: Blue BN: Brown BK: Black WH: White		

Setting-up

Sensor	Minimum mounting distances (mm)			
	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 6.5 flush mountable XS1L06	e ≥ 3	e ≥ 18	e ≥ 4.5	d ≥ 6.5 h ≥ 0
Ø 8 flush mountable XS1M08	e ≥ 3	e ≥ 18	e ≥ 4.5	d ≥ 8 h ≥ 0
Ø 8 non flush mountable XS2M08	e ≥ 10	e ≥ 30	e ≥ 7.5	d ≥ 24 h ≥ 5
Ø 12 flush mountable XS1N12	e ≥ 4	e ≥ 24	e ≥ 6	d ≥ 12 h ≥ 0
Ø 12 non flush mtable XS2N12 or XS4P12	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36 h ≥ 8
Ø 18 flush mountable XS1N18	e ≥ 10	e ≥ 60	e ≥ 15	d ≥ 18 h ≥ 0
Ø 18 non flush mtable XS2N18 or XS4P18	e ≥ 16	e ≥ 96	e ≥ 24	d ≥ 54 h ≥ 16
Ø 30 flush mountable XS1N30	e ≥ 20	e ≥ 120	e ≥ 30	d ≥ 30 h ≥ 0
Ø 30 non flush mtable XS2N30 or XS4P30	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90 h ≥ 30

Dimensions


Sensor	Flush mountable in metal				Non flush mountable in metal				
	Pre-cabled		Connector		Pre-cabled		Connector		
	a	b	a	b	a	b	a	b	c
Ø 6.5 metal	50	—	—	—	—	—	—	—	—
Ø 8 metal	50	42	61	42	50	36	61	36	4
Ø 12 metal	33	25	48	29	38	25	53	29	5
Ø 12 plastic	—	—	—	—	33	25	48	29	0
Ø 18 metal	37	28	49	28	37	20	49	20	8
Ø 18 plastic	—	—	—	—	34	26	48	29	0
Ø 30 metal	41	32	53	32	41	19	53	19	13
Ø 30 plastic	—	—	—	—	41	33	50	34	0

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, metal and plastic, flush and non flush mountable


Four-wire DC, solid-state PNP + NPN NO/NC
programmable output




XS1M●●KP340
XS4P●●KP340




XS2M●●KP340



XS1M●●KP340D
XS4P●●KP340D



XS2M●●KP340D



XSZB1●●

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 12, threaded M12 x 1					
Metal case, flush mountable					
2	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS1M12KP340	0.075
			M12 connector	XS1M12KP340D	0.025
Metal case, non flush mountable					
4	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS2M12KP340	0.075
			M12 connector	XS2M12KP340D	0.025
Plastic case, non flush mountable					
4	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS4P12KP340	0.075
			M12 connector	XS4P12KP340D	0.025
Ø 18, threaded M18 x 1					
Metal case, flush mountable					
5	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS1M18KP340	0.120
			M12 connector	XS1M18KP340D	0.060
Metal case, non flush mountable					
8	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS2M18KP340	0.120
			M12 connector	XS2M18KP340D	0.060
Plastic case, non flush mountable					
8	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS4P18KP340	0.120
			M12 connector	XS4P18KP340D	0.060
Ø 30, threaded M30 x 1.5					
Metal case, flush mountable					
10	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS1M30KP340	0.205
			M12 connector	XS1M30KP340D	0.145
Metal case, non flush mountable					
15	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS2M30KP340	0.205
			M12 connector	XS2M30KP340D	0.145
Plastic case, non flush mountable					
15	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS4P30KP340	0.205
			M12 connector	XS4P30KP340D	0.145
Accessories (2)					
Description mm				Reference	Weight kg
Fixing clamps	Ø 12			XSZB112	0.006
	Ø 18			XSZB118	0.010
	Ø 30			XSZB130	0.020

(1) For a 5 m long cable add **L1** to the reference; for a 10 m long cable add **L2** to the reference.
Example: **XS1M12KP340** becomes **XS1M12KP340L1** with a 5 m long cable.

(2) For further information, see page 128.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, metal and plastic, flush and non flush mountable

Four-wire DC, solid-state PNP + NPN NO/NC

programmable output

Characteristics				
Sensor type		XS●M●●KP340D		XS●M●●KP340
Product certifications		UL, CSA, CE		
Connection		M12 connector		Pre-cabled, length: 2 m
Operating zone	Ø 12 flush mountable	mm	0...1.6	
	Ø 12 non flush mountable	mm	0...3.2	
	Ø 18 flush mountable	mm	0...4	
	Ø 18 non flush mountable	mm	0...6.4	
	Ø 30 flush mountable	mm	0...8	
	Ø 30 non flush mountable	mm	0...12	
Differential travel		%	1...15 of effective sensing distance (Sr)	
Degree of protection		Conforming to IEC 60529	IP 67	IP 68, double insulation
Storage temperature		°C	- 40...+ 85	
Operating temperature		°C	- 25...+ 70	
Materials		Case	Nickel plated brass for XS1M and XS2M, PPS for XS4P	
		Cable	—	
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication			Yellow LED, 4 viewing ports at 90°	Yellow LED, annular
Rated supply voltage		V	— 12...24 with protection against reverse polarity	
Voltage limits (including ripple)		V	— 10...36	
Switching capacity		mA	≤ 200 with overload and short-circuit protection	
Voltage drop, closed state		V	≤ 2.6	
Current consumption, no-load		mA	≤ 10	
Maximum switching frequency	Ø 12	Hz	5000	
	Ø 18	Hz	2000	
	Ø 30 flush mountable	Hz	1000	
	Ø 30 non flush mountable	Hz	1000	
Delays	First-up	ms	≤ 5	
	Response	ms	≤ 0.1 for Ø 12, ≤ 0.15 for Ø 18, ≤ 0.3 for Ø 30	
	Recovery	ms	≤ 0.1 for Ø 12, ≤ 0.35 for Ø 18, ≤ 0.7 for Ø 30	

Wiring schemes

M12 connector	Pre-cabled	PNP + NPN	
	BU: Blue BN: Brown BK: Black WH: White	4-wire programmable, NO or NC output	
		NO 	NC

Setting-up

Sensor	Minimum mounting distances (mm)			
	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 12 flush mountable XS1M12	e ≥ 4	e ≥ 24	e ≥ 6	d ≥ 12 h ≥ 0
Ø 12 non flush mountable XS2M12 and XS4P12	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36 h ≥ 8
Ø 18 flush mountable XS1M18	e ≥ 10	e ≥ 60	e ≥ 15	d ≥ 18 h ≥ 0
Ø 18 non flush mountable XS2M18 and XS4P18	e ≥ 16	e ≥ 96	e ≥ 24	d ≥ 54 h ≥ 16
Ø 30 flush mountable XS1M30	e ≥ 20	e ≥ 120	e ≥ 30	d ≥ 30 h ≥ 0
Ø 30 non flush mountable XS2M30 and XS4P30	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90 h ≥ 30

Dimensions

Sensor	Flush mountable in metal				Non flush mountable in metal				
	Pre-cabled		Connector		Pre-cabled		Connector		c
	a	b	a	b	a	b	a	b	
Ø 12 metal	50	42	61	42	55	42	66	42	5
Ø 12 plastic	—	—	—	—	50	42	61	42	0
Ø 18 metal	60	51	72	51	60	44	72	44	8
Ø 18 plastic	—	—	—	—	60	51	70	51	0
Ø 30 metal	60	51	72	51	63	41	75	41	13
Ø 30 plastic	—	—	—	—	60	51	70	51	0


Inductive proximity sensors

OsiSense XS, general purpose


Plastic, cylindrical, non flush mountable

Two-wire AC or DC


Three-wire DC, solid-state output



XS4P●●●●340
XS4P●●●●370
XS4P●●●●230



XS4P●●●●340D
XS4P●●●●370D
XS4P●●●●230K



XS4P08●●340S

Sensing dist. (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 8, threaded M8 x 1					
Three-wire ≡ 12-24 V					
2.5	NO	PNP	Pre-cabled (L = 2 m) (1) (2)	XS4P08PA340	0.025
		NPN	Pre-cabled (L = 2 m) (1) (2)	XS4P08NA340	0.025
	NC	PNP	Pre-cabled (L = 2 m) (1) (2)	XS4P08PB340	0.025
		NPN	Pre-cabled (L = 2 m) (1) (2)	XS4P08NB340	0.025
Three-wire ≡ 12-48 V					
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS4P08PA370	0.030
		NPN	Pre-cabled (L = 2 m)	XS4P08NA370	0.030
	NC	PNP	Pre-cabled (L = 2 m)	XS4P08PB370	0.030
		NPN	Pre-cabled (L = 2 m)	XS4P08NB370	0.030
Two-wire ~ or ≡ 24-240 V					
2.5	NO		Pre-cabled (L = 2 m) (1)	XS4P08MA230	0.030
			1/2"-20UNF connector	XS4P08MA230K	0.020
	NC		Pre-cabled (L = 2 m) (1)	XS4P08MB230	0.030
			1/2"-20UNF connector	XS4P08MB230K	0.020
Ø 12, threaded M12 x 1					
Three-wire ≡ 12-24 V					
4	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P12PA340	0.060
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P12NA340	0.060
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P12PB340	0.060
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P12NB340	0.060
Three-wire ≡ 12-48 V					
4	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P12PA370	0.065
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P12NA370	0.065
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P12PB370	0.065
		NPN	Pre-cabled (L = 2 m) (3)	XS4P12NB370	0.065
Two-wire ~ or ≡ 24-240 V					
4	NO		Pre-cabled (L = 2 m) (1)	XS4P12MA230	0.065
			1/2"-20UNF connector	XS4P12MA230K	0.030
	NC		Pre-cabled (L = 2 m) (1)	XS4P12MB230	0.065
			1/2"-20UNF connector	XS4P12MB230K	0.030
Ø 18, threaded M18 x 1					
Three-wire ≡ 12-24 V					
8	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P18PA340	0.090
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P18NA340	0.090
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P18PB340	0.090
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P18NB340	0.090
Three-wire ≡ 12-48 V					
8	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P18PA370	0.100
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P18NA370	0.100
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P18PB370	0.100
		NPN	Pre-cabled (L = 2 m) (3)	XS4P18NB370	0.100
Two-wire ~ or ≡ 24-240 V					
8	NO		Pre-cabled (L = 2 m) (1)	XS4P18MA230	0.100
			1/2"-20UNF connector	XS4P18MA230K	0.040
	NC		Pre-cabled (L = 2 m) (1)	XS4P18MB230	0.100
			1/2"-20UNF connector	XS4P18MB230K	0.040
Ø 30, threaded M30 x 1.5					
Three-wire ≡ 12-24 V					
15	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P30PA340	0.120
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P30NA340	0.120
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P30PB340	0.120
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P30NB340	0.120
Three-wire ≡ 12-48 V					
15	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P30PA370	0.140
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P30NA370	0.140
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS4P30PB370	0.140
		NPN	Pre-cabled (L = 2 m) (3)	XS4P30NB370	0.140
Two-wire ~ or ≡					
15	NO		Pre-cabled (L = 2 m) (1)	XS4P30MA230	0.140
			1/2"-20UNF connector	XS4P30MA230K	0.080
	NC		Pre-cabled (L = 2 m) (1)	XS4P30MB230	0.140
			1/2"-20UNF connector	XS4P30MB230K	0.080

(1) For a 5 m long cable add **L1** to the reference; for a 10 m long cable add **L2** to the reference. Example: **XS4P08PA340** becomes **XS4P08PA340L1** with a 5 m long cable.

(2) For an M8 connector, add **S** to the reference. Example: **XS4P08PA340** becomes **XS4P08PA340S** with an M8 connector.

(3) For an M12 connector, add **D** to the reference. Example: **XS4P12PA370** becomes **XS4P12PA370D** with an M12 connector.

Inductive proximity sensors

OsiSense XS, general purpose

Plastic, cylindrical, non flush mountable

Two-wire AC or DC

Three-wire DC, solid-state output

Characteristics			
Sensor type		XS4P●●●●340●	XS4P●●●●370●
Product certifications		UL, CSA, CE	
Connection	Pre-cabled	Length: 2 m	
	Connector	M8 on Ø 8 M12 on Ø 12, Ø 18 and Ø 30	1/2"-20UNF
Operating zone	Ø 6.5 and Ø 8	mm	0...2
	Ø 12	mm	0...3.2
	Ø 18	mm	0...6.4
	Ø 30	mm	0...12
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection		Conforming to IEC 60529	IP 68, double insulation for pre-cabled version (except Ø 8: IP 67) IP 67 for connector version
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	PPS	
	Cable	PvR 3 x 0.34 mm ² except Ø 6.5 and 8: 3 x 0.11 mm ²	PvR 2 x 0.34 mm ² except Ø 8: 2 x 0.11 mm ²
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms
Output state indication		Yellow LED: annular on pre-cabled version Yellow LED: 4 viewing ports at 90° on connector version	
Rated supply voltage		V	12...24 with protection against reverse polarity 12...48 with protection against reverse polarity
Voltage limits (including ripple)		V	10...36 10...58
Switching capacity		mA	≤ 200 with overload and short-circuit protection 5...100 for Ø 8, 5...200 for Ø 12, 5...200 and 5...300 ~ for Ø 18 and 30
Voltage drop, closed state		V	≤ 2
Residual current, open state		mA	≤ 0.6
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	Ø 6.5, Ø 8 and Ø 12	Hz	5000
	Ø 18	Hz	2000
	Ø 30	Hz	1000
		Hz	1000, ~ 25
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.1 for Ø 8 and Ø 12, ≤ 0.15 for Ø 18, ≤ 0.3 for Ø 30
	Recovery	ms	≤ 0.1 for Ø 8 and Ø 12, ≤ 0.35 for Ø 18, ≤ 0.7 for Ø 30
			≤ 0.2 for Ø 8, Ø 12 and Ø 18, ≤ 0.4 for Ø 30

Wiring schemes

Connector	Pre-cabled	PNP	NPN	2-wire ~ or ---
 M8 1 4 3 2 1/2"-20UNF 2 3	M12 4 3 2 1 ~: 2 ~: 3	BU/1 PNP BK/4 (NO) BK/2 (NC) BU/3	BN/1 NPN BK/4 (NO) BK/2 (NC) BU/3	BN/2 BU/3
For M8 connector, NO and NC outputs on terminal 4				

Setting-up

Minimum mounting distances (mm)				
	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 8	e ≥ 10	e ≥ 30	e ≥ 7.5	d ≥ 24 h ≥ 5
Ø 12	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36 h ≥ 8
Ø 18	e ≥ 16	e ≥ 96	e ≥ 24	d ≥ 54 h ≥ 16
Ø 30	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90 h ≥ 30

Dimensions


XS4P	3-wire --- 12-24 V				3-wire --- 12-48 V or 2-wire ~/--- 24-240 V			
	Pre-cabled (mm)		Connector (mm)		Pre-cabled (mm)		Connector (mm)	
	a	b	a	b	a	b	a	b
Ø 8	33	26	42	26	50	40	61	40
Ø 12	35	25	48	27	52	42	61	42
Ø 18	36	25	48	29	62	52	70	52
Ø 30	43	32	50	34	62	52	70	52

Inductive proximity sensors

OsiSense XS, general purpose

Basic, plastic, cylindrical, non flush mountable


Three-wire DC, solid-state output



XS2...AL...L2



XS2...AL...M12



XSZB1...

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 8, threaded M8 x 1					
Three-wire 12-24 V, non flush mountable					
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS208ALPAL2	0.030
		NPN	Pre-cabled (L = 2 m) (1)	XS208ALNAL2	0.030
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS208ALPBL2	0.003
		NPN	Pre-cabled (L = 2 m) (1)	XS208ALNBL2	0.030
Ø 12, threaded M12 x 1					
Three-wire 12-24 V, non flush mountable					
4	NO	PNP	Pre-cabled (L = 2 m) (2)	XS212ALPAL2	0.065
			M12 connector	XS212ALPAM12	0.010
		NPN	Pre-cabled (L = 2 m) (2)	XS212ALNAL2	0.065
			M12 connector	XS212ALNAM12	0.010
	NC	PNP	Pre-cabled (L = 2 m) (2)	XS212ALPBL2	0.065
			M12 connector	XS212ALPBM12	0.010
		NPN	Pre-cabled (L = 2 m) (2)	XS212ALNBL2	0.065
			M12 connector	XS212ALNBM12	0.010
Ø 18, threaded M18 x 1					
Three-wire 12-24 V, non flush mountable					
8	NO	PNP	Pre-cabled (L = 2 m) (2)	XS218ALPAL2	0.095
			M12 connector	XS218ALPAM12	0.025
		NPN	Pre-cabled (L = 2 m) (2)	XS218ALNAL2	0.095
			M12 connector	XS218ALNAM12	0.025
	NC	PNP	Pre-cabled (L = 2 m) (2)	XS218ALPBL2	0.095
			M12 connector	XS218ALPBM12	0.025
		NPN	Pre-cabled (L = 2 m) (2)	XS218ALNBL2	0.095
			M12 connector	XS218ALNBM12	0.025
Ø 30, threaded M30 x 1.5					
Three-wire 12-24 V, non flush mountable					
15	NO	PNP	Pre-cabled (L = 2 m) (2)	XS230ALPAL2	0.135
			M12 connector	XS230ALPAM12	0.065
		NPN	Pre-cabled (L = 2 m) (2)	XS230ALNAL2	0.135
			M12 connector	XS230ALNAM12	0.065
	NC	PNP	Pre-cabled (L = 2 m) (2)	XS230ALPBL2	0.135
			M12 connector	XS230ALPBM12	0.065
		NPN	Pre-cabled (L = 2 m) (2)	XS230ALNBL2	0.135
			M12 connector	XS230ALNBM12	0.065
Accessories (3)					
Description				Reference	Weight kg
Fixing clamps			Ø 8	XSZB108	0.006
			Ø 12	XSZB112	0.006
			Ø 18	XSZB118	0.010
			Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5.

Example: XS208ALPAL2 becomes XS208ALPAL5 with a 5 m long cable.

(2) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS218ALPAL2 becomes XS218ALPAL5 with a 5 m long cable.

(3) For further information, see page 128.

Characteristics				
Sensor type			XS2●●ALP●L2 XS2●●ALN●L2	XS2●●ALP●M12 XS2●●ALN●M12
Product certifications			UL, CSA, CE	
Connection	Pre-cabled		Length: 2 m	–
	Connector		–	M12
Operating zone (1)	Ø 8	mm	0...2	
	Ø 12	mm	0...3.2	
	Ø 18	mm	0...6.4	
	Ø 30	mm	0...12	
Differential travel		%	1...15 of effective sensing distance (Sr)	
Degree of protection		Conforming to IEC 60529	IP 67	
Storage temperature		°C	- 40...+ 85	
Operating temperature		°C	- 25...+ 70	
Materials	Case		PPS	
	Cable		PVC 3 x 0.34 mm² except Ø 8: 3 x 0.11 mm²	–
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication			Yellow LED, on rear	Yellow LED: 4 viewing ports at 90°
Rated supply voltage		V	12...24 with protection against reverse polarity	
Voltage limits (including ripple)		V	10...36	
Switching capacity		mA	≤ 100 (except Ø 8: ≤ 50) with overload and short-circuit protection	
Voltage drop, closed state		V	≤ 2	
Current consumption, no-load		mA	≤ 10	
Maximum switching frequency	Ø 8	Hz	1000	
	Ø 12	Hz	1000	
	Ø 18	Hz	1000	
	Ø 30	Hz	1000	
Delays	First-up	ms	≤ 5	
	Response	ms	≤ 0.3	
	Recovery	ms	≤ 0.3	

(1) Detection curves, see page 132.

Wiring schemes

Connector	Pre-cabled	PNP	NPN
M12 4 3 1 2	BU: Blue BN: Brown BK: Black		


Setting-up

Minimum mounting distances (mm)



Sensors	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 8 XS208AL	e ≥ 10	e ≥ 30	e ≥ 7.5	d ≥ 24 h ≥ 5
Ø 12 XS212AL	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36 h ≥ 8
Ø 18 XS218AL	e ≥ 16	e ≥ 96	e ≥ 24	d ≥ 54 h ≥ 16
Ø 30 XS230AL	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90 h ≥ 30

Dimensions



Sensors		Non flush mountable in metal			
		Pre-cabled (mm)		Connector (mm)	
		a	b	a	b
Ø 8 XS208AL		49	40	—	—
Ø 12 XS212AL		49	42	61	42
Ø 18 XS218AL		59	52	71	52
Ø 30 XS230AL		59	52	71	52


Inductive proximity sensors

OsiSense XS, general purpose


Basic, cylindrical, metal, flush and non flush mountable

Two-wire AC


Three-wire DC, solid-state output




XS106BL●●L2




XS108BL●●M8



XS208BL●●L2



XS112BL●●L2



XS212BL●●M12

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 6.5, plain					
Three-wire ≡ 12-24 V, flush mountable					
1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS106BLPAL2	0.030
		NPN	Pre-cabled (L = 2 m) (1)	XS106BLNAL2	0.030
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS106BLPBL2	0.030
		NPN	Pre-cabled (L = 2 m) (1)	XS106BLNBL2	0.030
Ø 8, threaded M8 x 1					
Three-wire ≡ 12-24 V, flush mountable					
1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS108BLPAL2	0.035
			M8 connector	XS108BLPAM8	0.008
			M12 connector	XS108BLPAM12	0.015
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS108BLNAL2	0.035
			M8 connector	XS108BLNAM8	0.008
			M12 connector	XS108BLNAM12	0.015
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS108BLPBL2	0.035
			M8 connector	XS108BLPBM8	0.008
			M12 connector	XS108BLPBM12	0.015
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS108BLNBL2	0.035
			M8 connector	XS108BLNBM8	0.008
			M12 connector	XS108BLNBM12	0.015
Three-wire ≡ 12-24 V, non flush mountable					
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS208BLPAL2	0.035
			M8 connector	XS208BLPAM8	0.008
			M12 connector	XS208BLPAM12	0.015
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS208BLNAL2	0.035
			M8 connector	XS208BLNAM8	0.008
			M12 connector	XS208BLNAM12	0.015
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS208BLPBL2	0.035
			M8 connector	XS208BLPBM8	0.008
			M12 connector	XS208BLPBM12	0.015
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS208BLNBL2	0.035
			M8 connector	XS208BLNBM8	0.008
			M12 connector	XS208BLNBM12	0.015
Ø 12, threaded M12 x 1					
Three-wire ≡ 12-24 V, flush mountable					
2	NO	PNP	Pre-cabled (L = 2 m) (2)	XS112BLPAL2	0.070
			M12 connector	XS112BLPAM12	0.015
	NPN	PNP	Pre-cabled (L = 2 m) (2)	XS112BLNAL2	0.070
			M12 connector	XS112BLNAM12	0.015
	NC	PNP	Pre-cabled (L = 2 m) (2)	XS112BLPBL2	0.070
			M12 connector	XS112BLPBM12	0.015
NPN	PNP	Pre-cabled (L = 2 m) (2)	XS112BLNBL2	0.070	
		M12 connector	XS112BLNBM12	0.015	
Two-wire ~ 24-240 V, flush mountable					
2	NO		Pre-cabled (L = 2 m) (2)	XS112BLFAL2	0.075
Three-wire ≡ 12-24 V, non flush mountable					
4	NO	PNP	Pre-cabled (L = 2 m) (2)	XS212BLPAL2	0.070
			M12 connector	XS212BLPAM12	0.015
	NPN	PNP	Pre-cabled (L = 2 m) (2)	XS212BLNAL2	0.070
			M12 connector	XS212BLNAM12	0.015
	NC	PNP	Pre-cabled (L = 2 m) (2)	XS212BLPBL2	0.070
			M12 connector	XS212BLPBM12	0.015
	NPN	PNP	Pre-cabled (L = 2 m) (2)	XS212BLNBL2	0.070
			M12 connector	XS212BLNBM12	0.015

(1) For a 5 m long cable replace L2 by L5.

Example: XS106BLPAL2 becomes XS106BLPAL5 with a 5 m long cable.

(2) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS112BLPAL2 becomes XS112BLPAL5 with a 5 m long cable.


Inductive proximity sensors

OsiSense XS, general purpose


Basic, cylindrical, metal, flush and non flush mountable

Two-wire AC


Three-wire DC, solid-state output




XS118BL●●M12




XS118BL●●L2



XS130BL●●L2



XS230BL●●L2



XSZB1●●

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 18, threaded M18 x 1					
Three-wire ≡ 12-24 V, flush mountable					
5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS118BLPAL2	0.105
			M12 connector	XS118BLPAM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS118BLNAL2	0.105
			M12 connector	XS118BLNAM12	0.035
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS118BLPBL2	0.105
			M12 connector	XS118BLPBM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS118BLNBL2	0.105
			M12 connector	XS118BLNBM12	0.035
Two-wire ~ 24-240 V, flush mountable					
5	NO		Pre-cabled (L = 2 m) (1)	XS118BLFAL2	0.120
Three-wire ≡ 12-24 V, non flush mountable					
8	NO	PNP	Pre-cabled (L = 2 m) (1)	XS218BLPAL2	0.105
			M12 connector	XS218BLPAM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS218BLNAL2	0.105
			M12 connector	XS218BLNAM12	0.035
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS218BLPBL2	0.105
			M12 connector	XS218BLPBM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS218BLNBL2	0.105
			M12 connector	XS218BLNBM12	0.035
Ø 30, threaded M30 x 1.5					
Three-wire ≡ 12-24 V, flush mountable					
10	NO	PNP	Pre-cabled (L = 2 m) (1)	XS130BLPAL2	0.165
			M12 connector	XS130BLPAM12	0.075
		NPN	Pre-cabled (L = 2 m) (1)	XS130BLNAL2	0.165
			M12 connector	XS130BLNAM12	0.075
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS130BLPBL2	0.165
			M12 connector	XS130BLPBM12	0.075
		NPN	Pre-cabled (L = 2 m) (1)	XS130BLNBL2	0.165
			M12 connector	XS130BLNBM12	0.075
Two-wire ~ 24-240 V, flush mountable					
10	NO		Pre-cabled (L = 2 m) (1)	XS130BLFAL2	0.205
Three-wire ≡ 12-24 V, non flush mountable					
15	NO	PNP	Pre-cabled (L = 2 m) (1)	XS230BLPAL2	0.155
			M12 connector	XS230BLPAM12	0.085
		NPN	Pre-cabled (L = 2 m) (1)	XS230BLNAL2	0.155
			M12 connector	XS230BLNAM12	0.085
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS230BLPBL2	0.155
			M12 connector	XS230BLPBM12	0.085
		NPN	Pre-cabled (L = 2 m) (1)	XS230BLNBL2	0.155
			M12 connector	XS230BLNBM12	0.085
Accessories (2)					
Description				Reference	Weight kg
Fixing clamps			Ø 6.5	XSZB165	0.005
			Ø 8	XSZB108	0.006
			Ø 12	XSZB112	0.006
			Ø 18	XSZB118	0.010
			Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS118BLPAL2 becomes XS118BLPAL5 with a 5 m long cable.

(2) For further information, see page 128.

Inductive proximity sensors

OsiSense XS, general purpose

Basic, cylindrical, metal, flush and non flush mountable

Two-wire AC

Three-wire DC, solid-state output




Characteristics

Sensor type			XS1●●BLP●L2 XS1●●BLN●L2	XS1●●BLP●M● XS1●●BLN●M●	XS2●●BLP●L2 XS2●●BLN●L2	XS2●●BLP●M● XS2●●BLN●M●	XS1●●BLFAL2	
Product certifications			UL, CSA, CE					
Connection	Pre-cabled		Length 2 m		–	Length 2 m	–	Length 2 m
	Connector		–	M8 on Ø 8 M12 on Ø 8, Ø 12, Ø 18 and Ø 30	–	M8 on Ø 8 M12 on Ø 8, Ø 12, Ø 18 and Ø 30	–	
Operating zone (1)	Ø 6.5	mm	0...1.2		–		–	
	Ø 8	mm	0...1.2		0...2		–	
	Ø 12	mm	0...1.6		0...3.2		0...1.6	
	Ø 18	mm	0...4		0...6.4		0...4	
	Ø 30	mm	0...8		0...12		0...8	
Differential travel		%	1...15 of effective sensing distance (Sr)					
Degree of protection		Conforming to IEC 60529	IP 67					
Storage temperature		°C	- 40...+ 85					
Operating temperature		°C	- 25...+ 70					
Materials	Case		Nickel plated brass					
	Cable		PVC 3 x 0.34 mm² except Ø 6.5 and Ø 8: 3 x 0.11 mm²	–	PVC 3 x 0.34 mm² except Ø 6.5 and Ø 8: 3 x 0.11 mm²	–	PVC 2 x 0.34 mm²	
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)					
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms					
Output state indication			Yellow LED, on rear	Yellow LED: 4 viewing ports at 90°	Yellow LED, on rear	Yellow LED: 4 viewing ports at 90°	Yellow LED, on rear	
Rated supply voltage		V	~ 12...24 with protection against reverse polarity					~ 24...240
Voltage limits (including ripple)		V	~ 10...36					~ 20...264
Switching capacity		mA	≤ 100 (except Ø 6.5 and Ø 8: ≤ 50) with overload and short-circuit protection					40...200 (2)
Voltage drop, closed state		V	≤ 2					≤ 4.5 (≤ 7 for Ø 12)
Current consumption, no-load		mA	≤ 10					–
Residual current, open state		mA	–					≤ 1.5
Maximum switching frequency	Ø 6.5, Ø 8	Hz	1000					–
	Ø 12	Hz	1000					25
	Ø 18	Hz	1000					25
	Ø 30	Hz	1000					25
Delays	First-up	ms	≤ 5					≤ 40
	Response	ms	≤ 0.3					≤ 10
	Recovery	ms	≤ 0.3					≤ 15

(1) Detection curves, see page 132.




(2) These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a 0.4 A "quick-blow" fuse in series with the load, see page 128.

Wiring schemes

Connector	Pre-cabled	PNP	NPN	2-wire ~
 M8	 M12	 BN/1 BK/4 (NO) BK/2 (NC) BU/3	 BN/1 BK/4 (NO) BK/2 (NC) BU/3	 BN BU



BU: Blue
BN: Brown
BK: Black



Inductive proximity sensors

OsiSense XS, general purpose





Basic, cylindrical, metal, flush and non flush mountable

Two-wire AC

Three-wire DC, solid-state output


Setting-up

Minimum mounting distances (mm)



Sensors		Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 6.5 flush mountable	XS106	$e \geq 3$	$e \geq 18$	$e \geq 4.5$	$d \geq 6.5$ $h \geq 0$
Ø 8 flush mountable	XS108	$e \geq 3$	$e \geq 18$	$e \geq 4.5$	$d \geq 8$ $h \geq 0$
Ø 8 non flush mountable	XS208	$e \geq 10$	$e \geq 30$	$e \geq 7.5$	$d \geq 24$ $h \geq 5$
Ø 12 flush mountable	XS112	$e \geq 4$	$e \geq 24$	$e \geq 6$	$d \geq 12$ $h \geq 0$
Ø 12 non flush mountable	XS212	$e \geq 16$	$e \geq 48$	$e \geq 12$	$d \geq 36$ $h \geq 8$
Ø 18 flush mountable	XS118	$e \geq 10$	$e \geq 60$	$e \geq 15$	$d \geq 18$ $h \geq 0$
Ø 18 non flush mountable	XS218	$e \geq 16$	$e \geq 96$	$e \geq 24$	$d \geq 54$ $h \geq 16$
Ø 30 flush mountable	XS130	$e \geq 20$	$e \geq 120$	$e \geq 30$	$d \geq 30$ $h \geq 0$
Ø 30 non flush mountable	XS230	$e \geq 60$	$e \geq 180$	$e \geq 45$	$d \geq 90$ $h \geq 30$

Dimensions



Flush mountable in metal

Sensors		Pre-cabled (mm)		M8 connector (mm)			M12 connector (mm)		
		a	b	a	b		a	b	
Ø 6.5	XS106	42	—	—	—		—	—	
Ø 8	XS108	42	40	53	42		62	39	
Ø 12	XS112	42	58 (1) 39	58 (1)	—		53	39	
Ø 18	XS118	52	58 (1) 49	58 (1)	—		64	49	
Ø 30	XS130	52	58 (1) 49	58 (1)	—		64	49	

(1) For XS1●●BLFAL2

Non flush mountable in metal


Sensors		Pre-cabled (mm)		M8 connector (mm)			M12 connector (mm)		
		a	b	a	b	c	a	b	c
Ø 8	XS208	42	36	53	38	4	62	36	4
Ø 12	XS212	42	34	—	—	—	53	34	5
Ø 18	XS218	51	41	—	—	—	64	41	8
Ø 30	XS230	51	36	—	—	—	64	36	13

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, almost flush mountable, increased range


Three-wire DC, solid-state output




XS1L06●A349




XS1N●●●●349



XS1N08●●349S



XS1N●●●●349D



XSZB1●●

Sensing distance (Sn) (mm)	Function	Output	Connection	Reference	Weight kg
Ø 6.5, plain					
2.5	NO	PNP	Pre-cabled (L = 2 m)	XS1L06PA349	0.025
			M8 connector	XS1L06PA349S	0.010
			M12 connector	XS1L06PA349D	0.015
		NPN	Pre-cabled (L = 2 m)	XS1L06NA349	0.025
			M8 connector	XS1L06NA349S	0.010
			M12 connector	XS1L06NA349D	0.015
	NC	PNP	Pre-cabled (L = 2 m)	XS1L06PB349	0.025
			M8 connector	XS1L06PB349S	0.010
			M12 connector	XS1L06PB349D	0.015
		NPN	Pre-cabled (L = 2 m)	XS1L06NB349	0.025
			M8 connector	XS1L06NB349S	0.010
			M12 connector	XS1L06NB349D	0.015

Ø 8, threaded M8 x 1					
2.5	NO	PNP	Pre-cabled (L = 2 m)	XS1N08PA349	0.035
			M8 connector	XS1N08PA349S	0.015
			M12 connector	XS1N08PA349D	0.020
		NPN	Pre-cabled (L = 2 m)	XS1N08NA349	0.035
			M8 connector	XS1N08NA349S	0.015
			M12 connector	XS1N08NA349D	0.020
	NC	PNP	Pre-cabled (L = 2 m)	XS1N08PB349	0.035
			M8 connector	XS1N08PB349S	0.015
			M12 connector	XS1N08PB349D	0.020
		NPN	Pre-cabled (L = 2 m)	XS1N08NB349	0.035
			M8 connector	XS1N08NB349S	0.015
			M12 connector	XS1N08NB349D	0.020

Ø 12, threaded M12 x 1					
4	NO	PNP	Pre-cabled (L = 2 m)	XS1N12PA349	0.070
			M12 connector	XS1N12PA349D	0.020
		NPN	Pre-cabled (L = 2 m)	XS1N12NA349	0.070
			M12 connector	XS1N12NA349D	0.020
	NC	PNP	Pre-cabled (L = 2 m)	XS1N12PB349	0.070
			M12 connector	XS1N12PB349D	0.020
		NPN	Pre-cabled (L = 2 m)	XS1N12NB349	0.070
			M12 connector	XS1N12NB349D	0.020

Ø 18, threaded M18 x 1					
10	NO	PNP	Pre-cabled (L = 2 m)	XS1N18PA349	0.100
			M12 connector	XS1N18PA349D	0.040
		NPN	Pre-cabled (L = 2 m)	XS1N18NA349	0.100
			M12 connector	XS1N18NA349D	0.040
	NC	PNP	Pre-cabled (L = 2 m)	XS1N18PB349	0.100
			M12 connector	XS1N18PB349D	0.040
		NPN	Pre-cabled (L = 2 m)	XS1N18NB349	0.100
			M12 connector	XS1N18NB349D	0.040

Ø 30, threaded M30 x 1.5					
20	NO	PNP	Pre-cabled (L = 2 m)	XS1N30PA349	0.160
			M12 connector	XS1N30PA349D	0.100
		NPN	Pre-cabled (L = 2 m)	XS1N30NA349	0.160
			M12 connector	XS1N30NA349D	0.100
	NC	PNP	Pre-cabled (L = 2 m)	XS1N30PB349	0.160
			M12 connector	XS1N30PB349D	0.100
		NPN	Pre-cabled (L = 2 m)	XS1N30NB349	0.160
			M12 connector	XS1N30NB349D	0.100

Accessories (1)			
Description mm		Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For further information, see page 128.

Inductive proximity sensors



OsiSense XS, general purpose

Cylindrical, almost flush mountable, increased range

Three-wire DC, solid-state output

Characteristics			
Sensor type		XS1.....349D	XS1.....349S
Product certifications		UL, CSA, CE	
Connection		M12 connector	Pre-cabled, length: 2 m
Operating zone	Ø 6.5 and Ø 8	mm	0...2
	Ø 12	mm	0...3.2
	Ø 18	mm	0...8
	Ø 30	mm	0...16
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 67	
	Conforming to DIN 40050	IP 69K for Ø 12 to Ø 30	
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	Nickel plated brass	
	Cable	PvR 3 x 0.34 mm ² except Ø 6.5 and 8: 3 x 0.11 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing ports at 90°	
Rated supply voltage		V	12...24 with protection against reverse polarity
Voltage limits (including ripple)		V	10...36
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	Ø 6.5, Ø 8 and Ø 12	Hz	2500
	Ø 18	Hz	1000
	Ø 30	Hz	500
Delays	First-up	ms	≤ 5
	Response	ms	≤ 0.2 for Ø 8 and Ø 12, ≤ 0.3 for Ø 18, ≤ 0.6 for Ø 30
	Recovery	ms	≤ 0.2 for Ø 8 and Ø 12, ≤ 0.7 for Ø 18, ≤ 1.4 for Ø 30

Wiring schemes

Connector	Pre-cabled	PNP 3-wire	NPN 3-wire
M8 	M12 	BU: Blue BN: Brown BK: Black 	


For M8 connector, NO and NC outputs on terminal 4

Setting-up precautions

Sensor	Minimum mounting distances (mm)			
	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 6.5	 e ≥ 5	 e ≥ 30	 e ≥ 7.5	 d ≥ 10 h ≥ 1.6
Ø 8	 e ≥ 5	 e ≥ 30	 e ≥ 7.5	 d ≥ 10 h ≥ 1.6
Ø 12	 e ≥ 8	 e ≥ 48	 e ≥ 12	 d ≥ 14 h ≥ 2.4
Ø 18	 e ≥ 20	 e ≥ 96	 e ≥ 30	 d ≥ 28 h ≥ 3.6
Ø 30	 e ≥ 40	 e ≥ 240	 e ≥ 60	 d ≥ 50 h ≥ 6

Dimensions

Sensor	Flush mountable in metal			
	Pre-cabled	M8 connector	M12 connector	
	a	b	a	b
Ø 6.5	33	—	45	—
Ø 8	33	25	45	23
Ø 12	35	25	50	30
Ø 18	39	28	50	28
Ø 30	43	32	55	32




Inductive proximity sensors


OsiSense XS, general purpose

Miniature, cylindrical, flush and non flush mountable


Three-wire DC, solid-state output




XS1L04●●310




XS1N05●●310




XS1N05●●311S




XS1L04●●310S



XS●L06●●340



XS●L06●●340S
XS●L06●●349S



XS●L06●●340D

Ø 4 plain (1)

Sensing distance (Sn) mm	Function	Output	Connection (2)	Reference	Weight kg
Brass case, flush mountable					
1	NO	PNP	Pre-cabled (L = 2 m)	XS1L04PA310	0,025
			M8 connector	XS1L04PA310S	0.010
	NPN		Pre-cabled (L = 2 m)	XS1L04NA310	0.025
			M8 connector	XS1L04NA310S	0.010
	NC	PNP	Pre-cabled (L = 2 m)	XS1L04PB310	0.025
			M8 connector	XS1L04PB310S	0.010
	NPN		Pre-cabled (L = 2 m)	XS1L04NB310	0.025
			M8 connector	XS1L04NB310S	0.010

Stainless steel case, flush mountable

0,8	NO	PNP	Pre-cabled (L = 2 m)	XS1L04PA311	0.025
			M8 connector	XS1L04PA311S	0.010
	NPN		Pre-cabled (L = 2 m)	XS1L04NA311	0.025
			M8 connector	XS1L04NA311S	0.010
	NC	PNP	Pre-cabled (L = 2 m)	XS1L04PB311	0.025
			M8 connector	XS1L04PB311S	0.010
	NPN		Pre-cabled (L = 2 m)	XS1L04NB311	0.025
			M8 connector	XS1L04NB311S	0.010

Ø 5, threaded M5 x 0.5 (1)

Sensing distance (Sn) mm	Function	Output	Connection (2)	Reference	Weight kg
Brass case, flush mountable					
1	NO	PNP	Pre-cabled (L = 2 m)	XS1N05PA310	0,030
	NPN		Pre-cabled (L = 2 m)	XS1N05NA310	0,030
	NC	PNP	Pre-cabled (L = 2 m)	XS1N05PB310	0,030
	NPN		Pre-cabled (L = 2 m)	XS1N05NB310	0,030

Stainless steel case, flush mountable

0.8	NO	PNP	Pre-cabled (L = 2 m)	XS1N05PA311	0.030
			M8 connector	XS1N05PA311S	0.015
	NPN		Pre-cabled (L = 2 m)	XS1N05NA311	0.030
			M8 connector	XS1N05NA311S	0.015
	NC	PNP	Pre-cabled (L = 2 m)	XS1N05PB311	0.030
			M8 connector	XS1N05PB311S	0.015
	NPN		Pre-cabled (L = 2 m)	XS1N05NB311	0.030
			M8 connector	XS1N05NB311S	0.015

Ø 6.5 plain (1)

Sensing distance (Sn) mm	Function	Output	Connection (2)	Reference	Weight kg
Stainless steel case, non flush mountable					
2.5	NO	PNP	Pre-cabled (L = 2 m)	XS2L06PA340	0.025
			M8 connector	XS2L06PA340S	0.010
		NPN	M12 connector	XS2L06PA340D	0.015
			Pre-cabled (L = 2 m)	XS2L06NA340	0.025
		M8 connector		XS2L06NA340S	0.010
			M12 connector	XS2L06NA340D	0.015
	NC	PNP	Pre-cabled (L = 2 m)	XS2L06PB340	0.025
			M8 connector	XS2L06PB340S	0.010
		NPN	M12 connector	XS2L06PB340D	0.015
			Pre-cabled (L = 2 m)	XS2L06NB340	0.025
			M8 connector	XS2L06NB340S	0.010
			M12 connector	XS2L06NB340D	0.015

(1) For accessories, see page 128.

(2) For a 5 m long cable add **L1** to the reference; for a 10 m long cable add **L2** to the reference.
Example: XS1L04PA310 becomes XS1L04PA310L1 with a 5 m long cable.

Inductive proximity sensors

OsiSense XS, general purpose




Miniature, cylindrical, flush and non flush mountable

Three-wire DC, solid-state output

Characteristics			
Sensor type		XS1.....S, XS1.....D, XS2L06..A340	XS1....., XS2L06..A340
Product certifications		UL, CSA, CE	
Connection (1)	Connector	M8 on XS1.....S and M12 on XS1.....D	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 4	mm	0...0.8 (brass), 0...0.6 (stainless steel)
	Ø 5	mm	0...0.8 (brass), 0...0.6 (stainless steel)
	Ø 6.5 non flush mountable	mm	0...2 (stainless steel)
Degree of protection	Conforming to IEC 60529	IP 67	
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	Nickel plated brass or stainless steel, grade 303	
	Cable	PvR 3 x 0.11 mm ² or 4 x 0.08 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing ports at 90°	Yellow LED, annular
Rated supply voltage		V	— 5...24 for XS1L04..... and XS1N05..... — 12...24 for XS2L06.....
Voltage limits (including ripple)		V	— 5...30 for XS1L04..... and XS1N05..... — 10...38 for XS2L06.....
Current consumption, no-load		mA	≤ 10
Switching capacity	3-wire PNP/NPN	mA	≤ 100 with overload and short-circuit protection ≤ 200 for XS2L06 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Maximum switching frequency		kHz	5
Delays	First-up	ms	≤ 5
	Response	ms	≤ 0.1
	Recovery	ms	≤ 0.1








(1) Detection curves, see page 132

Wiring schemes

Connector	Pre-cabled	PNP 3-wire	NPN 3-wire
M8  M12 	BU: Blue BN: Brown BK: Black WH: White		

For M8 connector, NO and NC outputs on terminal 4.

Setting-up


Minimum mounting distances (mm)			
Sensor	Side by side	Face to face	Facing a metal object
Ø 4	 e ≥ 2	 e ≥ 12	 e ≥ 3
Ø 5	 e ≥ 2	 e ≥ 12	 e ≥ 3
Ø 6.5	 e ≥ 5	 e ≥ 30	 e ≥ 7.5

Tightening torque

Stainless steel: 2.2 N.m. Brass: 1.6 N.m (values obtained with washers mounted)

Dimensions

Sensor	Pre-cabled			M8 connector			M12 connector		
	a	b	c	a	b	c	a	b	c
Ø 4	29	—	—	41	—	—	—	—	—
Ø 5	29	24	—	41	24	—	—	—	—
Ø 6.5	33	—	4	46	—	4	49	—	4




Inductive proximity sensors

OsiSense XS Application


Adjustable range sensors

Cylindrical, flush mountable and non flush mountable


Three-wire DC, solid-state output

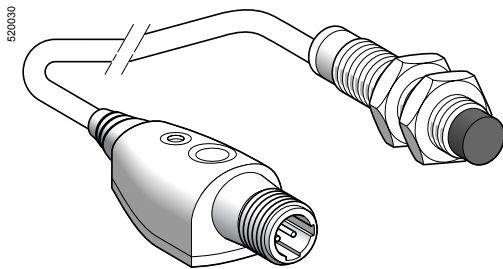

XS6...B2...L01M12



XSZBPM12



XSZB...

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
5	NO	PNP	Remote M12 connector on 0.15 m flying lead	XS612B2PAL01M12	0.100
		NPN	Remote M12 connector on 0.15 m flying lead	XS612B2NAL01M12	0.100
	NC	PNP	Remote M12 connector on 0.15 m flying lead	XS612B2PBL01M12	0.100
		NPN	Remote M12 connector on 0.15 m flying lead	XS612B2NBL01M12	0.100

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
9	NO	PNP	Remote M12 connector on 0.15 m flying lead	XS618B2PAL01M12	0.140
		NPN	Remote M12 connector on 0.15 m flying lead	XS618B2NAL01M12	0.140
	NC	PNP	Remote M12 connector on 0.15 m flying lead	XS618B2PBL01M12	0.140
		NPN	Remote M12 connector on 0.15 m flying lead	XS618B2NBL01M12	0.140

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
18	NO	PNP	Remote M12 connector on 0.15 m flying lead	XS630B2PAL01M12	0.220
		NPN	Remote M12 connector on 0.15 m flying lead	XS630B2NAL01M12	0.220
	NC	PNP	Remote M12 connector on 0.15 m flying lead	XS630B2PBL01M12	0.220
		NPN	Remote M12 connector on 0.15 m flying lead	XS630B2NBL01M12	0.220

Accessories (1)

Description	Reference	Weight kg
Remote control fixing clamp	XSZBPM12	0.015
Sensor fixing clamps	Ø 12 XSZB112	0.006
	Ø 18 XSZB118	0.010
	Ø 30 XSZB130	0.020

(1) For further information, see page 128.

Inductive proximity sensors

OsiSense XS Application

Adjustable range sensors

Cylindrical, flush mountable and non flush mountable

Three-wire DC, solid-state output

Characteristics

Sensor type			XS6...B2...L01M12	
Product certifications			UL, CSA, CE	
Connection	Connector		Remote M12 connector on 0.15 m flying lead	
Sensing distance and adjustment zone	Ø 12	Nominal sensing distance (Sn)	mm	0...5 non flush mounted / 0...3.4 flush mounted
		Precision adjustment zone	mm	1.7...5 non flush mounted / 1.7...3.4 flush mounted
	Ø 18	Nominal sensing distance (Sn)	mm	0...9 non flush mounted / 0...6 flush mounted
		Precision adjustment zone	mm	3...9 non flush mounted / 3...6 flush mounted
	Ø 30	Nominal sensing distance (Sn)	mm	0...18 non flush mounted / 0...11 flush mounted
		Precision adjustment zone	mm	6...18 non flush mounted / 6...11 flush mounted
Differential travel			%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529		IP 67, 	
Storage temperature			°C	- 40...+ 85
Operating temperature			°C	- 25...+ 70
Materials	Case		Nickel plated brass	
	Remote control		PBT	
	Cable		PvR - Ø 4.2 mm	
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms	
Indicators	Output state		Yellow LED	
	Supply on and teach mode		Green LED	
Rated supply voltage			V	--- 12...24 with protection against reverse polarity
Voltage limits (including ripple)			V	--- 10...36
Switching capacity			mA	≤ 100 with overload and short-circuit protection
Voltage drop, closed state			V	≤ 2
Current consumption, no-load			mA	≤ 10
Maximum switching frequency			Hz	1000
Delays	First-up		ms	≤ 10
	Response		ms	≤ 0.3
	Recovery		ms	≤ 0.7


Wiring schemes

Connector


M12



PNP






NPN



Setting-up


Minimum mounting distances (mm)



	Side by side		Face to face		Facing a metal object
	flush mounted	not flush mounted	flush mounted	not flush mounted	
Ø 12	e ≥ 14	50	e ≥ 50	100	e ≥ 3.4
Ø 18	e ≥ 28	100	e ≥ 100	200	e ≥ 6
Ø 30	e ≥ 48	180	e ≥ 180	360	e ≥ 11

Dimensions

XS6

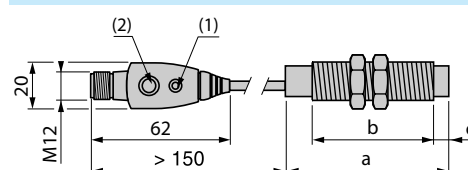

- (1) LED
(2) Teach mode button

	Connector (mm)		
	a	b	c
Ø 12	54.6	42	5
Ø 18	60	44	8
Ø 30	62.6	41	13


Inductive proximity sensors

OsiSense XS, general purpose with increased range

Flat, flush mountable/non flush mountable + teach mode ⁽¹⁾

Two-wire AC or DC

Three-wire DC, solid-state output

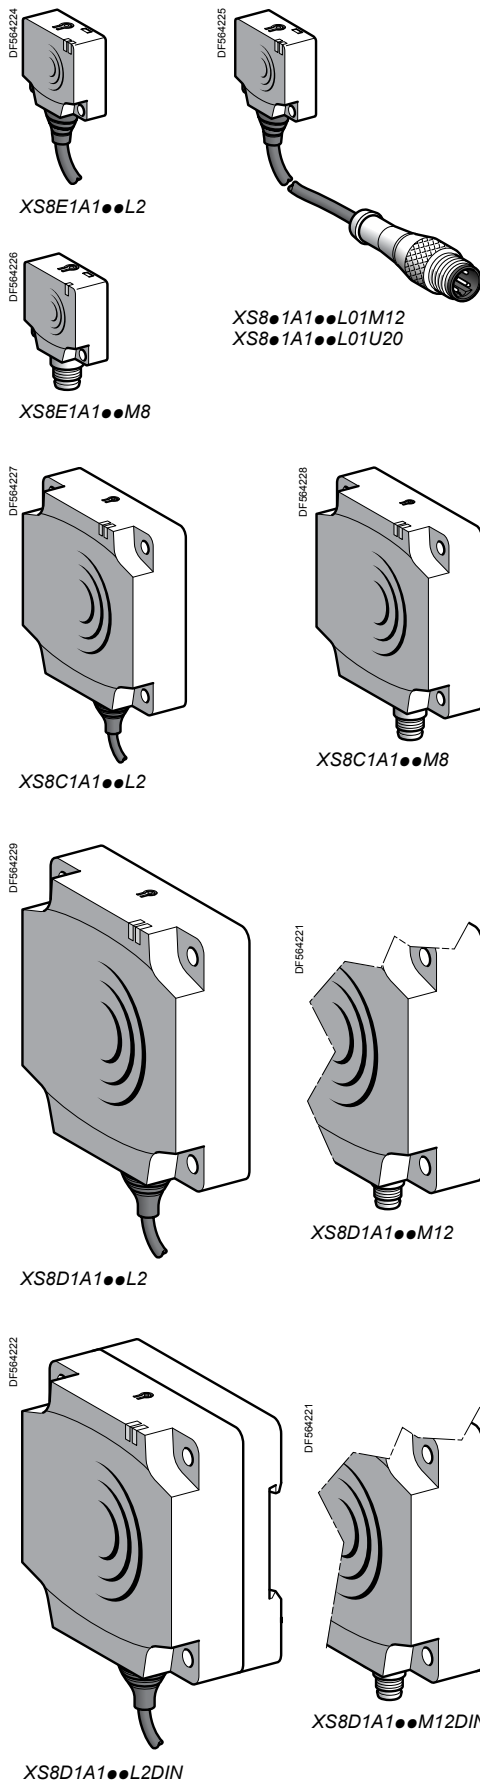

Flat, 26 x 26 x 13 mm format ⁽²⁾

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire with overload and short-circuit protection					
15	NO	PNP	Pre-cabled (L = 2 m) (3)	XS8E1A1PAL2	0.075
			M8 connector	XS8E1A1PAM8	0.040
			Remote M12 connector	XS8E1A1PAL01M12	0.040
		NPN	Pre-cabled (L = 2 m) (3)	XS8E1A1NAL2	0.075
			M8 connector	XS8E1A1NAM8	0.040
			Remote M12 connector	XS8E1A1NAL01M12	0.040
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS8E1A1PBL2	0.075
			M8 connector	XS8E1A1PBM8	0.040
			Remote M12 connector	XS8E1A1PBL01M12	0.040
		NPN	Pre-cabled (L = 2 m) (3)	XS8E1A1NBL2	0.075
			M8 connector	XS8E1A1NBM8	0.040
			Remote M12 connector	XS8E1A1NBL01M12	0.040

Two-wire ~ or with overload and short-circuit protection ⁽⁴⁾

15	NO	-	Pre-cabled (L = 2 m) (3)	XS8E1A1MAL2	0.070
			Remote 1/2"-20UNF connector	XS8E1A1MAL01U20	0.040
	NC	-	Pre-cabled (L = 2 m) (3)	XS8E1A1MBL2	0.070
			Remote 1/2"-20UNF connector	XS8E1A1MBL01U20	0.040

Flat, 40 x 40 x 15 mm format ⁽²⁾

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire with overload and short-circuit protection					
25	NO	PNP	Pre-cabled (L = 2 m) (3)	XS8C1A1PAL2	0.095
			M8 connector	XS8C1A1PAM8	0.060
			Remote M12 connector	XS8C1A1PAL01M12	0.060
		NPN	Pre-cabled (L = 2 m) (3)	XS8C1A1NAL2	0.095
			M8 connector	XS8C1A1NAM8	0.060
			Remote M12 connector	XS8C1A1NAL01M12	0.060
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS8C1A1PBL2	0.095
			M8 connector	XS8C1A1PBM8	0.060
			Remote M12 connector	XS8C1A1PBL01M12	0.060
		NPN	Pre-cabled (L = 2 m) (3)	XS8C1A1NBL2	0.095
			M8 connector	XS8C1A1NBM8	0.060
			Remote M12 connector	XS8C1A1NBL01M12	0.060

Two-wire ~ or with overload and short-circuit protection ⁽⁴⁾

25	NO	-	Pre-cabled (L = 2 m) (3)	XS8C1A1MAL2	0.090
			Remote 1/2"-20UNF connector	XS8C1A1MAL01U20	0.060
	NC	-	Pre-cabled (L = 2 m) (3)	XS8C1A1MBL2	0.090
			Remote 1/2"-20UNF connector	XS8C1A1MBL01U20	0.060

Flat, 80 x 80 x 26 mm format ⁽²⁾

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire with overload and short-circuit protection					
60	NO	PNP	Pre-cabled (L = 2 m) (3)	XS8D1A1PAL2 ⁽⁵⁾	0.390
			M12 connector	XS8D1A1PAM12 ⁽⁵⁾	0.340
			Pre-cabled (L = 2 m) (3)	XS8D1A1NAL2 ⁽⁵⁾	0.390
		NPN	M12 connector	XS8D1A1NAM12 ⁽⁵⁾	0.340
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS8D1A1PBL2 ⁽⁵⁾	0.390
			M12 connector	XS8D1A1PBM12 ⁽⁵⁾	0.340
		NPN	Pre-cabled (L = 2 m) (3)	XS8D1A1NBL2 ⁽⁵⁾	0.390
			M12 connector	XS8D1A1NBM12 ⁽⁵⁾	0.340
	60	NO	Pre-cabled (L = 2 m) (3)	XS8D1A1MAL2 ⁽⁵⁾	0.390
			1/2"-20UNF connector	XS8D1A1MAU20 ⁽⁵⁾	0.340
		NC	Pre-cabled (L = 2 m) (3)	XS8D1A1MBL2 ⁽⁵⁾	0.390
			1/2"-20UNF connector	XS8D1A1MBU20 ⁽⁵⁾	0.340

⁽¹⁾ For further information on flush or non flush mountable sensors using teach mode, see page 22.

⁽²⁾ For accessories, see page 128.

⁽³⁾ For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

⁽⁴⁾ It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

⁽⁵⁾ For clipping onto 35 mm omega rail or 80 x 80 x 40 mm format, add DIN to the end of the reference. Example: XS8D1A1PAL2 DIN.

Inductive proximity sensors

OsiSense XS, general purpose with increased range






Flat, flush mountable/non flush mountable + teach mode (1)

Two-wire AC or DC

Three-wire DC, solid-state output

Characteristics			
Sensor type		XS8E●●●●●M8, XS8C●●●●●M8, XS8D●●●●●M12, XS8D●●●●●U20	XS8E●●●●●L01M12, XS8E●●●●●L01U20, XS8C●●●●●L01M12, XS8C●●●●●L01U20
Product certifications		UL, CSA, CEC	XS8E●●●●●L2, XS8C●●●●●L2, XS8D●●●●●L2
Connection	Connector	M8 except XS8●●●●●M12: M12 XS8●●●●●U20: 1/2"-20UNF	Remote on 0.15 m flying lead XS8●●●●●L01M12: M12 XS8●●●●●L01U20: 1/2"-20UNF
	Pre-cabled	—	Length: 2 m
Sensing distance and adjustment zone	XS8E	Nominal sensing dist. Sn	mm 0...15 not flush mounted / 0...10 flush mounted
		Fine adjustment zone	mm 5...15 not flush mounted / 5...10 flush mounted
	XS8C	Nominal sensing dist. Sn	mm 0...25 not flush mounted / 0...15 flush mounted
		Fine adjustment zone	mm 8...25 not flush mounted / 8...15 flush mounted
	XS8D	Nominal sensing distance Sn	mm 0...60 not flush mounted / 0...40 flush mounted
		Fine adjustment zone	mm 20...60 not flush mounted / 20...40 flush mounted
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529		IP 67, double insulation □ (except M8 connector: IP 67) IP 68, □
Storage temperature		°C	-40...+85
Operating temperature		°C	-25...+70
Materials	Case		PBT
	Cable		— PvR 3 x 0.34 mm ² □ and PvR 2 x 0.34 mm ² ∩
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms
Indicators	Output state		Yellow LED
	Supply on and teach mode		Green LED
Rated supply voltage	3-wire	V	12...24 with protection against reverse polarity
	2-wire	V	~ or □ 24...240 (~ 50/60 Hz)
Voltage limits (including ripple)	3-wire	V	10...36
	2-wire	V	~ or □ 20...264
Current consumption, no-load	3-wire	mA	≤ 10
Residual current, open state	2-wire	mA	≤ 1.5
Switching capacity	3-wire	mA	≤ 100 XS8E, ≤ 200 XS8C and XS8D, with overload and short-circuit protection
	2-wire	mA	5...200 ∩ XS8E, 5...300 ~ XS8C and XS8D, 5...200 □ XS8C and XS8D
Voltage drop, closed state	3-wire	V	≤ 2
	2-wire	V	≤ 5.5
Maximum switching frequency		Hz	2000 XS8E, 1000 XS8C, 150 XS8D
Delays	First-up	ms	≤ 10 XS8E, XS8C and XS8D (3-wire), ≤ 10 XS8E and XS8C, ≤ 15 XS8D (2-wire)
	Response	ms	≤ 0.3
	Recovery	ms	≤ 0.8 XS8E and XS8C, ≤ 6 XS8D

Wiring schemes













Connector	Pre-cabled	PNP/M12 or M8	NPN/M12 or M8	2-wire 1/2"-20UNF
  	BU: Blue BN: Brown BK: Black			

For M8 connector, NO and NC outputs on terminal 4

Setting-up

Minimum mounting distances (mm)				
Side by side	e ≥	XS8E	XS8C	XS8D
	Flush mounted	40	60	200
	Not flush mounted	150	125	600
Face to face	e ≥	XS8E	XS8C	XS8D
	Flush mounted	80	120	400
	Not flush mounted	300	250	not recommended
Facing a metal object	e ≥	XS8E	XS8C	XS8D
		10	15	40

Dimensions

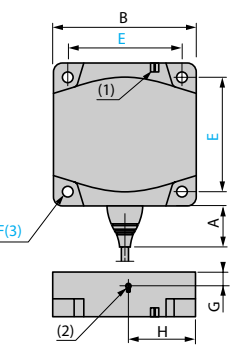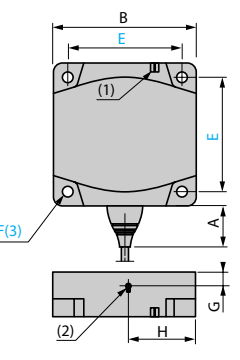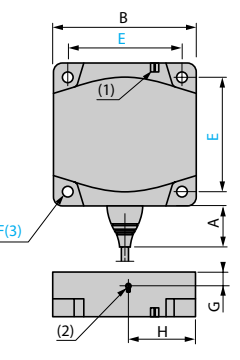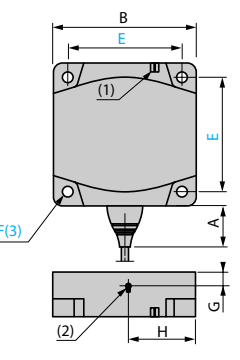	XS8C/D/E			XS8C/D			XS8E		
	A (cable)			A (connector)			B		
	14			11			26		
	C			D			E		
	13			8.8			20		
	F			G			H		
	3.5			6.8			6.6		
	A (cable)			A (connector)			B		
	14			11			26		
	C			D			E		
	15			9.8			33		
	F			G			H		
	4.5			8.3			8.3		
	A (cable)			A (connector)			B		
	23			18			80		
	C			D			E		
	26			16			65		
	F			G			H		
	5.5			8.5			37.8		
	A (cable)			A (connector)			B		
	23			18			80		
	C			D			E		
	40			30			65		
	F			G			H		
	5.1			22.5			37.8		


(1) LED
(2) Teach mode button
(3) For CHC type screws

Inductive proximity sensors

OsiSense XS Application

Sensors for rotation monitoring, slip detection, shaft overload detection
Cylindrical form

Example:
Coupling breakage monitoring

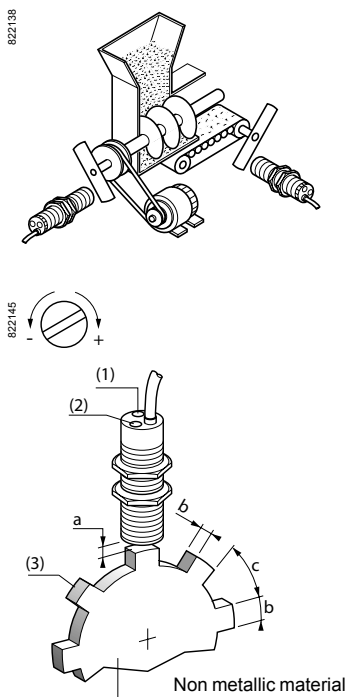

Functions

These self-contained rotation speed monitoring sensors have the special feature of incorporating, in the same case, the pulse sensing and processing electronics as well as the output switching amplifier that are required to establish an integrated rotation monitoring device.

The unit provides an economical solution for detecting slip, belt breakage, drive shaft shear and overloading, etc., in the following applications: conveyor belts, bucket elevators, Archimedian screws, grinders, crushers, pumps, centrifugal driers, mixers, etc.

Operating principle

The output signal of this type of sensor is processed by an impulse comparator incorporated in the sensor. The impulse frequency F_c generated by the moving part to be monitored is compared to the frequency F_r preset on the sensor. The output switching circuit of the sensor is in the closed state for $F_c > F_r$ and the open state for $F_c < F_r$.

Sensors XSAV are particularly suitable for the detection of underspeed: when the speed of the moving part F_c falls below a preset threshold F_r , this causes the output circuit of the sensor to switch off.

Note: Following power-up, the operational status of the sensor is subject to a delay of 9 seconds in order for the moving part being monitored to run-up to its nominal speed. During this time, the output of the sensor remains in the closed state.



Adjustment of frequency threshold

- Adjustment of sensor's frequency threshold: using potentiometer, 15 turns approximately.
- To increase the frequency threshold: turn the adjustment screw clockwise (+).
- To decrease the frequency threshold: turn the adjustment screw anti-clockwise (-).

Potentiometer	Diameter of sensor		
LED	a	b	c
Metal target	M30	4...6 mm	30 mm
		60 mm	

Potentiometer adjustment curves (for XSAV1●801, 2-wire ~ or - sensors)


Low speed version (6...150 impulses/minute) High speed version (120...3000 impulses/minute)

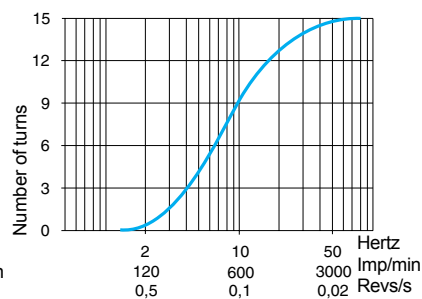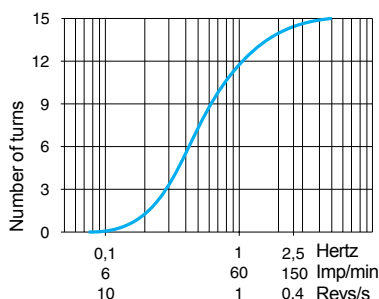

Setting-up


Minimum distances (mm)

Side by side




$e \geq 20$

Facing a metal object




$e \geq 30$

Face to face



$e \geq 120$


Mounted in a metal support



$d \geq 30, h \geq 0$

Fixing nut tightening torque: $< 50 \text{ N.m}$

Sensor	Flush mountable in metal
--------	--------------------------



Lengths (mm):


a = Overall

b = Threaded section

a = 81

b = 57

Ø = M30



	DC	DC	AC/DC	AC/DC
Nominal sensing distance (Sn)	10 mm	10 mm	10 mm	10 mm
Adjustable frequency range	6...150 impulses/min	120...3000 impulses/min	6...150 impulses/min	120...3000 impulses/min

References


3-wire --- PNP / NC	XSAV11373	XSAV12373	—	—
2-wire --- or $\sim$ / NC	—	—	XSAV11801	XSAV12801
Weight (kg)	0.300			

Characteristics


Connection	Pre-cabled, 3 x 0.34 mm ² , length 2 m (1)	Pre-cabled, 2 x 0.34 mm ² , length 2 m (1)
Degree of protection conforming to IEC 60529	IP 67	
Operating zone	0...8 mm	
Repeat accuracy	3 % of Sr	
Differential travel	3...15 % of Fr	
Operating temperature	- 25...+ 70 °C	
Output state indication	Red LED	
Rated supply voltage	--- 12...48 V with protection against reverse polarity	$\sim$ 24...240 V (50/60 Hz) or --- 24...210 V
Voltage limits (including ripple)	--- 10...58 V	$\sim$ or --- 20...264 V
Switching capacity	$\leq$ 200 mA with overload and short-circuit protection	$\sim$ 5...350 mA or --- 5...200 mA (2)
Voltage drop, closed state	$\leq$ 1.8 V	$\leq$ 5.7 V
Residual current, open state	—	$\leq$ 1.5 mA
Current consumption, no-load	$\leq$ 15 mA	—
Maximum switching frequency	6000 impulses/min (for XSAV11●●●); 48,000 impulses/min (for XSAV12●●●)	
"Run-up" delay following power-up	9 seconds $\pm$ 20 % + 1/Fr (3)	

Wiring schemes

3-wire ---
XSAV1●373



2-wire $\sim$ or ---
XSAV1●801



(1) For a 5 m long cable add L05 to the reference, for a 10 m long cable add L10 to the reference.

Example: XSAV11373 becomes XSAV11373L05 with a 5 m long cable.

(2) These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a 0.4 A "quick-blow" fuse in series with the load, see page 128.


(3) For a sensor without a "run-up" delay following power-up, replace XSAV1 in the reference by XSAV0. Example: XSAV11801 becomes XSAV01801 without a "run-up" delay. For a reduced "run-up" delay of 3 s, replace XSAV1 in the reference by XSAV3.

Inductive proximity sensors

OsiSense XS Application


Sensors for rotation monitoring, slip detection and shaft overload detection, with teach mode

Operating principle and applications

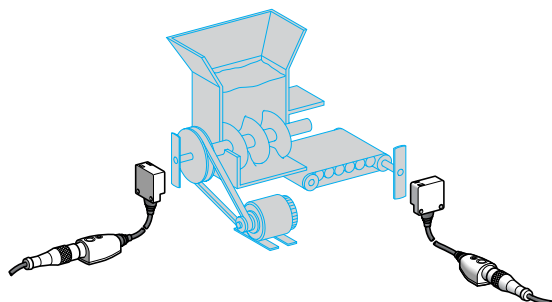

- These inductive proximity sensors are designed for monitoring rotational speed or the speed of the flow of objects to be protected or monitored. They operate on the principle of comparing a speed threshold preset by the operator against the instantaneous measurement of the speed of the moving object to be protected.
- They provide a simple, economical solution for detecting slip, belt breakage, coupling breakage and overload, etc.
- They are widely used in grinder/crusher, mixer, pump, centrifugal driver, conveyor belt, bucket elevator, Archimedeian screw, etc. type applications.

Installation and setting-up

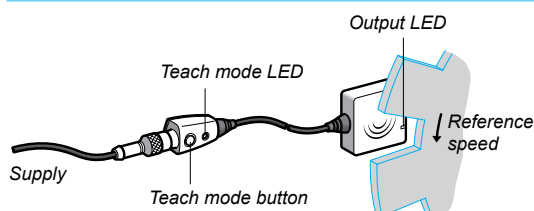

Setting-up and positioning the sensor

- In the positioning phase, the XS9 sensor can operate as a standard inductive sensor (Schneider Electric patent). Operation in inductive mode enables validation of reliable detection of all the moving objects to be monitored.
- Using this system, the positioning is therefore made 100 % reliable and can be checked at any time without altering the settings of the sensor.

Speed adjustment in teach mode

- The normal or reference speed of the moving object (1) to be monitored is adjusted by simply pressing the teach mode button (2) and is then validated by the display LED.
- If in doubt, the sensor can be reset at any time to the factory settings.
- (1) To allow the moving object to reach its normal speed (machine inertia), the sensor holds its output closed for 9 seconds.
- (2) The sensor's default drop-out underspeed corresponds to the preset speed - 30 %.

Example: If the preset speed is 1000 rpm, the sensor drops out on underspeed when the speed of the moving object drops below $1000 - (1000 \times 0.3) = 700$ rpm.

- 20 %, - 11 % and - 6 % thresholds can be obtained by pressing the teach mode button.


Setting-up

Minimum mounting distances (mm)

Type	Side by side	Face to face
XS9E	$e \geq 40$	$e \geq 80$
XS9C	$e \geq 60$	$e \geq 120$

Dimensions

XS9E, XS9C

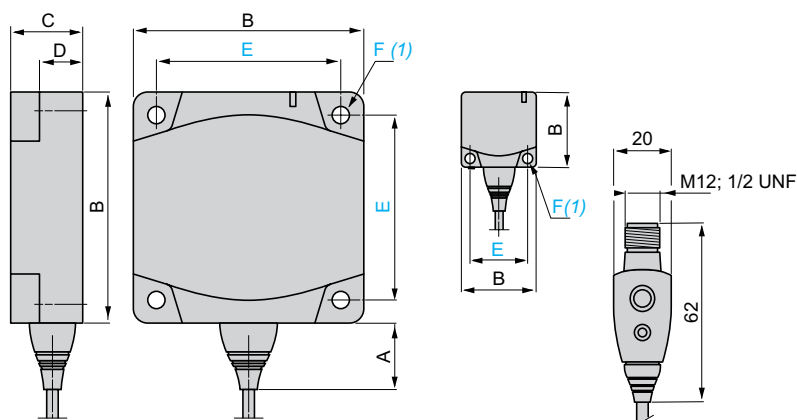

(1) For CHC type screws

Type	A	B	C	D	E	F
XS9E	14	26	13	8.8	20	3.5
XS9C	14	40	15	9.8	33	4.5


Inductive proximity sensors

OsiSense XS Application

Sensors for rotation monitoring, slip detection and shaft overload detection, with teach mode

Flush mountable in metal

PBT case

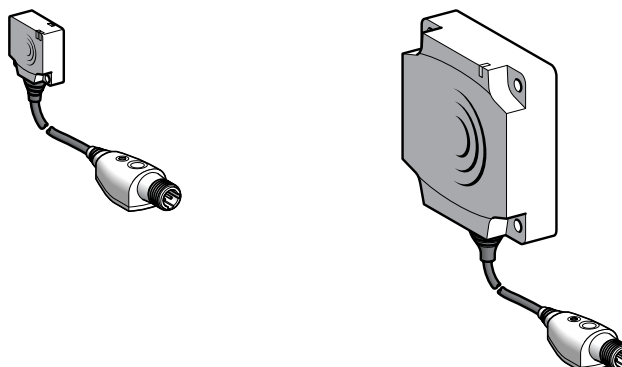

Nominal sensing distance (Sn)	10 mm	15 mm	10 mm	15 mm
Adjustable frequency range	6...6000 impulses/min			

References

3-wire	PNP / NC	XS9E11RPBL01M12	XS9C11RPBL01M12	—	—
2-wire	— or ~ / NC	—	—	XS9E11RMBL01U20	XS9C11RMBL01U20
Weight (kg)		0.040	0.060	0.040	0.060

Characteristics

Product certifications		UL, CSA, CE			
Connection		Remote M12 connector on 0.15 m flying lead		Remote 1/2"-20UNF connector on 0.15 m flying lead	
Operating zone		0...8 mm	0...12 mm	0...8 mm	0...12 mm
Degree of protection	Conforming to IEC 60529	IP 67, double insulation			
Storage temperature		- 40...+ 85 °C			
Operating temperature		- 25...+ 70 °C			
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms			
Indicators	Output state	Yellow LED			
	Supply on	Green LED			
Rated supply voltage		12...24 V		~ or 24...240 V (50/60 Hz)	
Voltage limits (including ripple)		10...36 V		~ or 20...264 V	
Switching capacity		≤ 100 mA (1)	≤ 200 mA (1)	~ or 5...100 mA (2)	5...200 mA, ~ 5...300 mA(2)
Voltage drop, closed state		≤ 2 V		≤ 5.5 V	
Residual current, open state		≤ 100 mA		≤ 1.5 mA	
Current consumption, no-load		≤ 10 mA		—	
Maximum switching frequency		48,000 impulses/min			
“Run-up” delay following power-up		9 seconds + 1/Fr			


(1) With overload and short-circuit protection.

(2) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes

Connector		3-wire —	2-wire ~ or —
M12	1/2"-20UNF	XS9E11RPBL01M12	XS9E11RMBL01U20

Accessory (1)



XSZBPM12

Description	Reference	Weight kg
Remote control fixing clamp	XSZBPM12	0.015

(1) For accessories, see page 128.

Inductive proximity sensors


OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾ or 4...20 mA

For position, displacement and deformation control/monitoring

Functions

Example:
Sorting parts



These analogue output proximity sensors are solid-state sensors designed for monitoring displacement. They are not measuring sensors. They are suitable for use in many sectors, particularly for applications involving:

- deformation and displacement monitoring,
- vibration amplitude and frequency monitoring,
- control of dimensional tolerances,
- position control,
- concentricity or eccentricity monitoring.

Operating principle


The operating principle of the sensor is that of a damped oscillator. The degree of damping will depend on the distance of an object from the sensing face. The sensor will sense the distance and produce an output current with a value directly proportional to this distance.

Output curves 4...20 mA, 2-wire connection

XS1M12AB120

Sn = 0.2...2 mm


Ø 12 mm

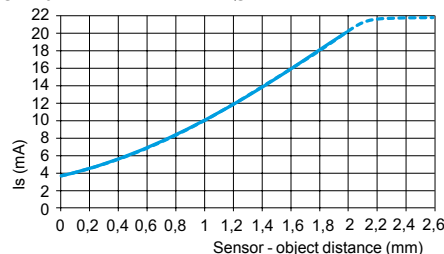

XS1M18AB120

Sn = 0.5...5 mm


Ø 18 mm

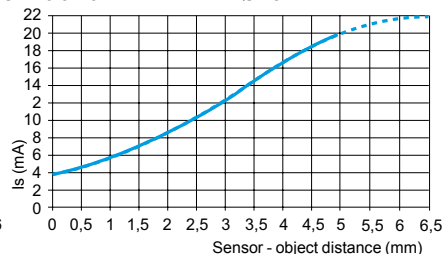

XS1M30AB120

Sn = 1...10 mm


Ø 30 mm

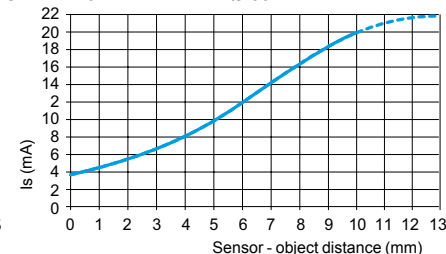

XS4P12AB120

Sn = 0.4...4 mm


Ø 12 mm

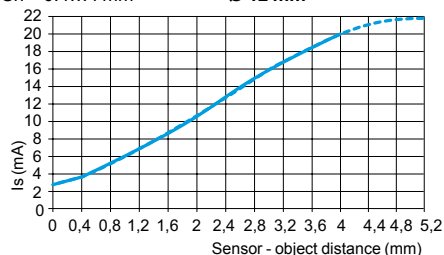

XS4P18AB120

Sn = 0.8...8 mm


Ø 18 mm

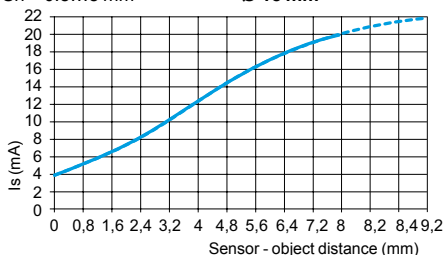

XS4P30AB120

Sn = 1.5...15 mm

Ø 30 mm

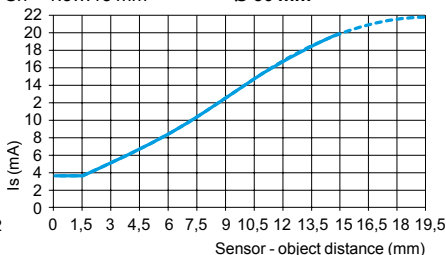


Output curves 0...10 V, 3-wire connection

XS4P12AB110

Sn = 0.4...4 mm


Ø 12 mm

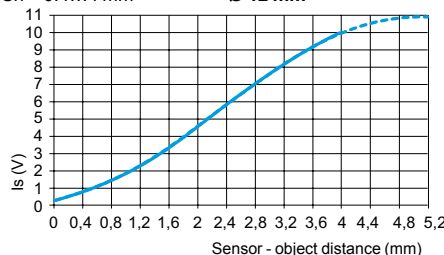

XS4P18AB110

Sn = 0.8...8 mm


Ø 18 mm

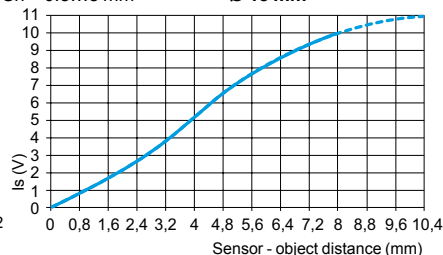

XS4P30AB110


Sn = 1.5...15 mm

Ø 30 mm

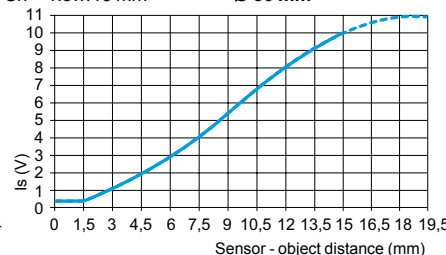

Wiring schemes


2-wire connection

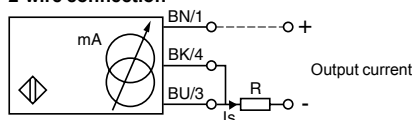

	Output current	Load impedance value
12 V	4...20 mA	$R \leq 8.2 \Omega$
24 V	4...20 mA	$R \leq 470 \Omega$

Ensure a minimum of 10 V between the + and the - (terminal 3) of the sensor.

3-wire connection



	Output current	Load impedance value	Output voltage	Load impedance value
24 V	0...10 mA	$R \leq 1500 \Omega$	0...10 V	$R = 1000 \Omega$
48 V	0...10 mA	$R \leq 3300 \Omega$	0...10 V	$R = 1000 \Omega$

Ensure a minimum of 5 V between the + and the sensor output (terminal 4).





⁽¹⁾ Voltage range only obtained with a load impedance of 1000 Ω .

Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾ or
4...20 mA

For position, displacement and deformation control/monitoring

Sensor	Flush mountable in metal	Non flush mountable in metal	
			
Lengths (mm): a = Overall b = Threaded section	a = 50 b = 42	a = 50 b = 42	a = 50 b = 42
Nominal sensing distance (Sn)	Metal case 2 mm	Plastic case 4 mm	Plastic case 4 mm

References

3-wire ---	Output 0...10 V (2)	—	—	XS4P12AB110
2-wire ---	Output 4...20 mA (2)	XS1M12AB120	XS4P12AB120	—
Weight (kg)		0.075	0.065	0.065





Characteristics

Product certifications	CE, UL, CSA		
Connection	Pre-cabled, PVR 3 x 0.34 mm ² , length 2 m		
Degree of protection Conforming to IEC 60529	IP 67		
Operating zone	0.2...2 mm	0.4...4 mm	0.4...4 mm
Repeat accuracy	± 3 %		
Linearity error	± 2 mA		± 1 V
Ambient air temperature	For operation: - 25...+ 70 °C		
Rated supply voltage	--- 12...24 V	--- 12...24 V	--- 24...48 V
Voltage limits (including ripple)	--- 10...36 V	--- 10...36 V	--- 15...58 V
Output current drift Ambient temperature: - 25...+ 70 °C	≤ 10 %		
Current consumption, no-load	4 mA		
Maximum operating rate	1500 Hz		

(1) Voltage range only obtained with a load impedance of 1000 Ω.

(2) Output current range Is, see page 86.





Setting-up

Minimum mounting distances (mm)	Side by side	Face to face	Facing a metal object	Mounted in a metal support
				
XS1M12AB120 flush mountable	e ≥ 4	e ≥ 24	e ≥ 6	d ≥ 12, h ≥ 0
XS4P12AB110 non flush mountable	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36, h ≥ 8
XS4P12AB120 non flush mountable	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36, h ≥ 8
Fixing nut tightening torque	< 6 N.m (metal case), < 2 N.m (plastic case)			
Other versions	Please consult our Customer Care Centre.			

Inductive proximity sensors

OsiSense Application

Sensors with analogue output signal 0...10 V ⁽¹⁾ or
4...20 mA





Sensor	Flush mountable in metal	Non flush mountable in metal	
			
Lengths (mm): a = Overall b = Threaded section c = For non flush mountable sensors	a = 53 b = 44 c = 0	a = 41 b = 26 c = 8	a = 41 b = 26 c = 8
Nominal sensing distance (Sn)	Metal case 5 mm	Plastic case 8 mm	Plastic case 8 mm





References				
3-wire $\overline{\text{---}}$	Output 0...10 V (2)	–	–	XS4P18AB110
2-wire $\overline{\text{---}}$	Output 4...20 mA (2)	XS1M18AB120	XS4P18AB120	–
Weight (kg)		0.120	0.080	0.080

Characteristics				
Product certifications	CE, UL, CSA			
Connection	Pre-cabled, PvR 3 x 0.34 mm ² , length 2 m			
Degree of protection Conforming to IEC 60529	IP 67			
Operating zone	0.5...5 mm	0.8...8 mm	0.8...8 mm	
Repeat accuracy	± 3 %			
Linearity error	± 2 mA			± 1 V
Ambient air temperature	For operation: - 25...+ 70 °C			
Rated supply voltage	$\overline{\text{---}}$ 12...24 V	$\overline{\text{---}}$ 12...24 V	$\overline{\text{---}}$ 24...48 V	
Voltage limits (including ripple)	$\overline{\text{---}}$ 10...36 V	$\overline{\text{---}}$ 10...36 V	$\overline{\text{---}}$ 15...58 V	
Output current drift Ambient temperature: - 25...+ 70 °C	≤ 10 %			
Current consumption, no-load	4 mA			
Maximum operating rate	500 Hz			

(1) Voltage range only obtained with a load impedance of 1000 Ω .

(2) Output current range Is, see page 86.

Setting-up				
Minimum mounting distances (mm)	Side by side	Face to face	Facing a metal object	Mounted in a metal support
				
XS1M18AB120 flush mountable	e ≥ 10	e ≥ 60	e ≥ 15	d ≥ 18, h ≥ 0
XS4P18AB110 non flush mountable	e ≥ 32	e ≥ 96	e ≥ 24	d ≥ 54, h ≥ 16
XS4P18AB120 non flush mountable	e ≥ 32	e ≥ 96	e ≥ 24	d ≥ 54, h ≥ 16
Fixing nut tightening torque	< 15 N.m (metal case), < 5 N.m (plastic case)			
Other versions	Please consult our Customer Care Centre.			

Sensor	Flush mountable in metal	Non flush mountable in metal	
			
Lengths (mm): a = Overall b = Threaded section c = For non flush mountable sensors	a = 50 b = 42 c = 0	a = 53 b = 32 c = 13	a = 53 b = 32 c = 13
Nominal sensing distance (Sn)	Metal case 10 mm	Plastic case 15 mm	Plastic case 15 mm

References

3-wire --- Output 0...10 V (2)	—	—	XS4P30AB110
2-wire --- Output 4...20 mA (2)	XS1M30AB120	XS4P30AB120	—
Weight (kg)	0.200	0.100	0.100





Characteristics

Product certifications	CE, UL, CSA		
Connection	Pre-cabled, PvR 3 x 0.34 mm ² , length 2 m		
Degree of protection Conforming to IEC 60529	IP 67		
Operating zone	1...10 mm	1.5...15 mm	1.5...15 mm
Repeat accuracy	± 3 %		
Linearity error	± 2 mA		± 1 V
Ambient air temperature	For operation: - 25...+ 70 °C		
Rated supply voltage	--- 12...24 V	--- 12...24 V	--- 24...48 V
Voltage limits (including ripple)	--- 10...36 V	--- 10...36 V	--- 15...58 V
Output current drift Ambient temperature: - 25...+ 70 °C	≤ 10 %		
Current consumption, no-load	4 mA		
Maximum operating rate	300 Hz		

(1) Voltage range only obtained with a load impedance of 1000 Ω.

(2) Output current range Is, see page 86.

Setting-up

Minimum mounting distances (mm)	Side by side	Face to face	Facing a metal object	Mounted in a metal support
				
XS1M30AB120 flush mountable	e ≥ 20	e ≥ 120	e ≥ 30	d ≥ 30, h ≥ 0
XS4P30AB110 non flush mountable	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90, h ≥ 30
XS4P30AB120 non flush mountable	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90, h ≥ 30
Fixing nut tightening torque	< 40 N.m (metal case), < 20 N.m (plastic case)			
Other versions	Please consult our Customer Care Centre.			

Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾

For position, displacement and deformation control/monitoring

Functions

These analogue output proximity sensors are solid-state sensors designed for monitoring displacement. They are not measuring sensors.

They are suitable for use in many sectors, particularly for applications involving:


- ☐ deformation and displacement monitoring,
- ☐ vibration amplitude and frequency monitoring,
- ☐ control of dimensional tolerances,
- ☐ position control,
- ☐ concentricity or eccentricity monitoring.

Operating principle


The operating principle of the sensor is that of a damped oscillator. The degree of damping will depend on the distance of an object from the sensing face. The sensor will sense the distance and produce an output current with a value directly proportional to this distance.

Output curves 0...10 V, 3-wire connection


XS9F




XS9E



XS9C



XS9D



Wiring schemes


Connector



Pre-cabled

BN: Brown
BU: Blue
BK: Black

3-wire connection



	Output current	Load impedance value	Output voltage	Load impedance value
24 V	0...10 mA	$R \leq 1400 \Omega$	0...10 V	$R = 1000 \Omega$

Note: Ensure a minimum of 5 V between the + (terminal 1) and the sensor output (terminal 4).

⁽¹⁾ Voltage range only obtained with a load impedance of 1000 Ω .

Inductive proximity sensors


OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾

For position, displacement and deformation control/monitoring

Flush mountable in metal

PBT case

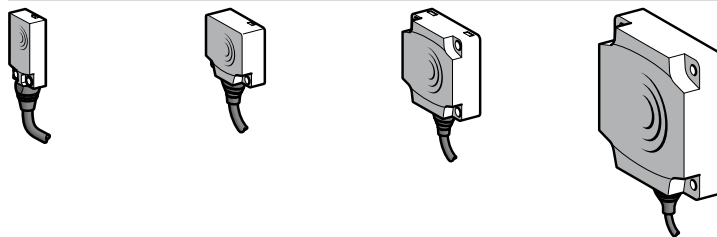


Nominal sensing distance (Sn)		5 mm	10 mm	15 mm	40 mm
References					
3-wire ---	Pre-cabled (L = 2 m) (2)	XS9F111A1L2	XS9E111A1L2	XS9C111A1L2	XS9D111A1L2
0...10 V	Connector	XS9F111A1L01M8	XS9E111A1L01M12	XS9C111A1L01M12	XS9D111A1M12
Weight (kg)	Pre-cabled (L = 2 m) (2)	0.060	0.075	0.095	0.340
	Connector	0.040	0.055	0.075	0.320

Characteristics


Product certifications		UL, CSA, CE			
Connection	Pre-cabled	PvR 3 x 0.34 mm², length 2 m for XS9●111A●L2			
	Connector	0.15 m flying lead with M8 connector	0.15 m flying lead with M12 connector		M12
Operating zone		1...5 mm	1...10 mm	2...15 mm	5...40 mm
Degree of protection	Pre-cabled	IP 68	IP 68, double insulation ☐		
Conforming to IEC 60529	Connector	IP 67	IP 67, double insulation ☐		
Storage temperature		- 40...+ 85 °C			
Operating temperature		- 25...+ 70 °C			
Materials		PBT case			
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms			
Output state indication		No			
Rated supply voltage		--- 24 V			
Voltage limits (including ripple)		--- 15...36 V			
Repeat accuracy		± 3 %			
Linearity error		± 1 V			
Current consumption, no-load		≤ 4 mA with overload and short-circuit protection			
Maximum operating frequency		2000 Hz	1000 Hz	100 Hz	
Output current drift		≤ 10 % (throughout the operating temperature range)			

Dimensions


XS9F




XS9E/C/D



XS9C/D



XS9E



(2) For CHC type screws

Type	A (L2)	A (M12)	B	C	D	E	F
XS9E	14	—	26	13	8.8	20	3.5
XS9C	14	—	40	15	9.8	33	4.5
XS9D	23	14	80	26	16	65	5.5

Setting-up (Minimum mounting distances (mm))

Type	Side by side	Face to face	Facing a metal object
XS9F			
XS9E	$e \geq 15$	$e \geq 36$	$e \geq 15$
XS9C	$e \geq 30$	$e \geq 72$	$e \geq 30$
XS9D	$e \geq 45$	$e \geq 110$	$e \geq 45$
	$e \geq 120$	$e \geq 300$	$e \geq 120$

(1) Voltage range only obtained with a load impedance of 1000 Ω.

(2) For a 5 m long cable replace L2 by L5, for a 10 m long cable replace L2 by L10.

Example: XS9C111A1L2 becomes XS9C111A1L5 with a 5 m long cable.

Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 4...20 mA

For position, displacement and deformation control/monitoring

Functions

These analogue output proximity sensors are solid-state sensors designed for monitoring displacement. They are not measuring sensors.

They are suitable for use in many sectors, particularly for applications involving:

- ☐ deformation and displacement monitoring,
- ☐ vibration amplitude and frequency monitoring,
- ☐ control of dimensional tolerances,
- ☐ position control,
- ☐ concentricity or eccentricity monitoring.


Operating principle

The operating principle of the sensor is that of a damped oscillator. The degree of damping will depend on the distance of an object from the sensing face. The sensor will sense the distance and produce an output current with a value directly proportional to this distance.

Output curves 4...20 mA, 2-wire connection


XS9F

Sn = 1...5 mm

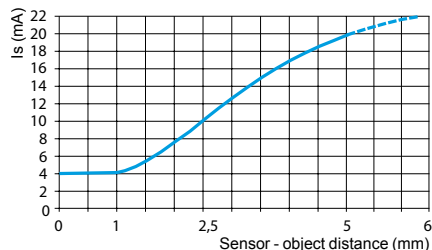


XS9E

Sn = 1...10 mm

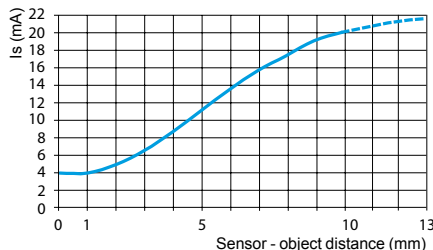


XS9C

Sn = 2...15 mm

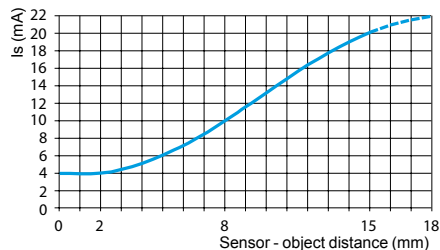


XS9D

Sn = 5...40 mm

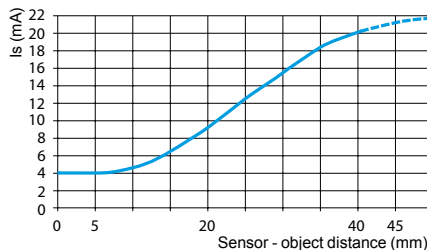

Wiring schemes


Connector



Pre-cabled

BN: Brown
BU: Blue
BK: Black

2-wire connection



	Output current	Load impedance value
12 V	4...20 mA	$R \leq 8.2 \Omega$
24 V	4...20 mA	$R \leq 470 \Omega$

Note: Ensure a minimum of 10 V between the + (terminal 1) and - (terminal 3) of the sensor.

Inductive proximity sensors


OsiSense XS Application

Sensors with analogue output signal 4...20 mA

For position, displacement and deformation
control/monitoring

Flush mountable in metal

PBT case

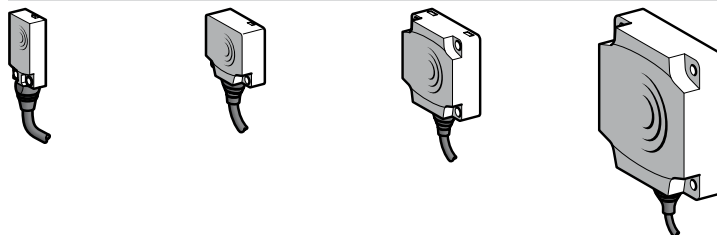


Nominal sensing distance (Sn)		5 mm	10 mm	15 mm	40 mm
References					
2-wire ---	Pre-cabled (L = 2 m) (1)	XS9F111A2L2	XS9E111A2L2	XS9C111A2L2	XS9D111A2L2
4...20 mA	Connector	XS9F111A2L01M8	XS9E111A2L01M12	XS9C111A2L01M12	XS9D111A2M12
Weight (kg)	Pre-cabled (L = 2 m)	0.060	0.075	0.095	0.340
	Connector	0.040	0.055	0.075	0.320

Characteristics


Product certifications		UL, CSA, CE			
Connection	Pre-cabled	PvR 3 x 0.34 mm², length 2 m for XS9●111A●L2			
	Connector	0.15 m flying lead with M8 connector	0.15 m flying lead with M12 connector		M12
Operating zone		1...5 mm	1...10 mm	2...15 mm	5...40 mm
Degree of protection	Pre-cabled	IP 68	IP 68, double insulation ☐		
Conforming to IEC 60529	Connector	IP 67	IP 67, double insulation ☐		
Storage temperature		- 40...+ 85 °C			
Operating temperature		- 25...+ 60 °C		- 25...+ 70 °C	
Materials		PBT case			
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms			
Output state indication		No			
Rated supply voltage		--- 12...24 V			
Voltage limits (including ripple)		--- 10...36 V			
Repeat accuracy		± 3 %			
Linearity error		± 2 mA			
Current consumption, no-load		≤ 4 mA with overload and short-circuit protection			
Maximum operating frequency		2000 Hz	1000 Hz	100 Hz	
Output current drift		≤ 10 % (throughout the operating temperature range)			

Dimensions


XS9F




XS9E/C/D



XS9C/D



XS9E



(1) For CHC type screws

Type	A (L2)	A (M12)	B	C	D	E	F
XS9E	14	—	26	13	8.8	20	3.5
XS9C	14	—	40	15	9.8	33	4.5
XS9D	23	14	80	26	16	65	5.5

Setting-up (Minimum mounting distances (mm))

Type	Side by side	Face to face	Facing a metal object
XS9F			
XS9E	e ≥ 15	e ≥ 36	e ≥ 15
XS9C	e ≥ 30	e ≥ 72	e ≥ 30
XS9D	e ≥ 45	e ≥ 110	e ≥ 45
	e ≥ 120	e ≥ 300	e ≥ 120

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.



Example: XS9F111A2L2 becomes **XS9F111A2L5** with a 5 m long cable.

Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾
or 4...20 mA. Plastic case, 40 x 40 mm front face
5 position turret head

Sensor	Non flush mountable in metal	
Dimensions	40 x 40 x 70 mm	40 x 40 x 117 mm



Nominal sensing distance (Sn)	25 mm
--------------------------------------	-------

References

3-wire ---	0...10 V output ⁽¹⁾	XS9C2A2A1M12	XS9C4A2A1P20 ⁽²⁾
2-wire ---	4...20 mA output	XS9C2A2A2M12	XS9C4A2A2P20 ⁽²⁾

XS9C4...P20 sensors are available with an ISO M20 cable entry and can be supplied with a PG 13.5 (e.g. **XS9C4A2A1G13**) or a 1/2" NPT (e.g. **XS9C4A2A2N12**) cable entry: please consult our Customer Care Centre for more information.



Weight (kg)	0.149	0.244
--------------------	-------	-------

Characteristics

Product certifications	UL, CSA, CE	
Conformity to standards	IEC 60947-5-2 and IEC 60947-5-7	
Connection	M12 connector (4-pin)	Screw terminals, clamping capacity 3 x 1.5 mm ²
Operating zone	2...27 mm	
Linearity error	< 3%	
Repeat accuracy	< 3%	
Output current drift	< 5%	
Degree of protection	Conforming to IEC 60529 and DIN 40050	IP 65, IP 67 and IP 69K
Temperature	Storage	- 40...+ 85°C
	Operation ⁽³⁾	- 25...+ 70°C
Material	Case: PBT	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10...55 Hz)
Shock resistance	Conforming to IEC 60068-2-27	50 gn for 11 ms
Indicators	Output state (alignment aid)	Yellow LED
Rated supply voltage	4...20 mA	--- 12...24 V with protection against reverse polarity
	0...10 V	--- 24 V with protection against reverse polarity
Voltage limits (including ripple)	4...20 mA	--- 12...36 V
	0...10 V	--- 15...36 V
Current consumption, no-load	3-wire ---	< 4 mA
Delays	First-up	< 7 ms
	Response	< 6 ms
	Recovery	< 6 ms

Analogue outputs 4-20 mA and 0-10 V

XS9 C2A2A2M12 and XS9 C4A2A2P20	XS9 C2A2A1M12 and XS9 C4A2A1P20
--	--

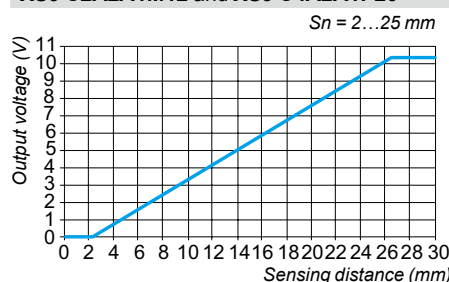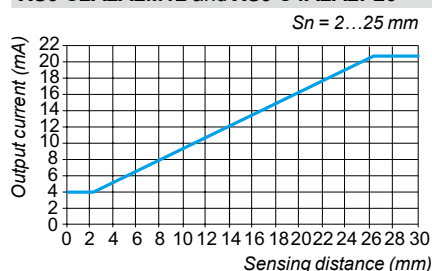

⁽¹⁾ Voltage range only obtained with a load impedance of 1000 Ω.

⁽²⁾ These sensors are supplied without a cable gland. An adaptable PG 13.5 cable gland is available (reference **XSZ PE13**).

⁽³⁾ Sensors are available for very low temperatures (suffix **TF**: - 40°C, + 70°C) or very high temperatures (suffix **TT**: - 25°C, + 85°C); please consult our Customer Care Centre.


Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾
or 4...20 mA. Plastic case, 40 x 40 mm front face
5 position turret head

Setting-up precautions

Minimum mounting distances (mm)



Side by side

$e \geq 120$

Face to face

$e \geq 240$


Facing a metal object

$e \geq 90$

Sensors non flush mountable in metal

Wiring schemes


2-wire



	Output current	Load impedance value
12 V	4...20 mA	$R \leq 82 \Omega$
24 V	4...20 mA	$R \leq 560 \Omega$

Ensure a minimum of 10 V between the + and the - (terminal 3) of the sensor.

3-wire

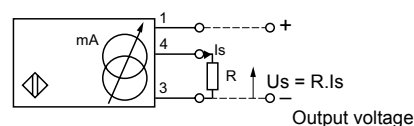


	Output current	Load impedance value	Output voltage	Load impedance value
12 V	0...10 mA	$R \leq 630 \Omega$	—	—
24 V	0...10 mA	$R \leq 1500 \Omega$	0...10 V	$R = 1000 \Omega$

Ensure a minimum of 5 V between the + and the sensor output (terminal 4).


Dimensions

XS9C2A2A1M12 and XS9C2A2A2M12

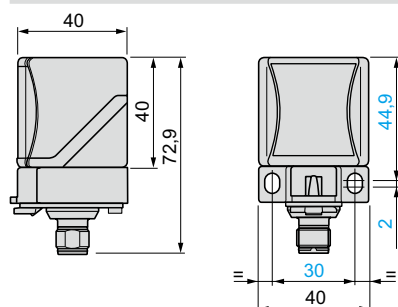


Head positions


XS9C2A2A1M12 and XS9C2A2A2M12

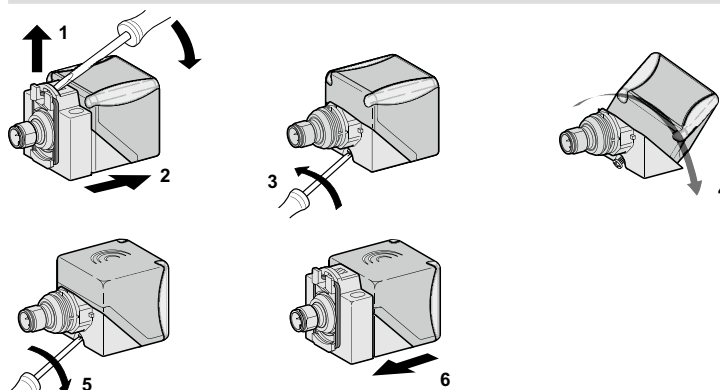

XS9C4A2A1P20 and XS9C4A2A2P20

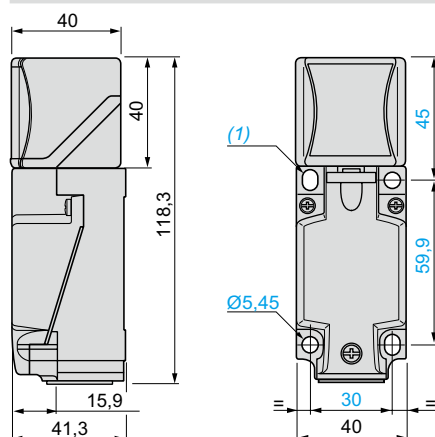

XS9C4A2A1P20 and XS9C4A2A2P20

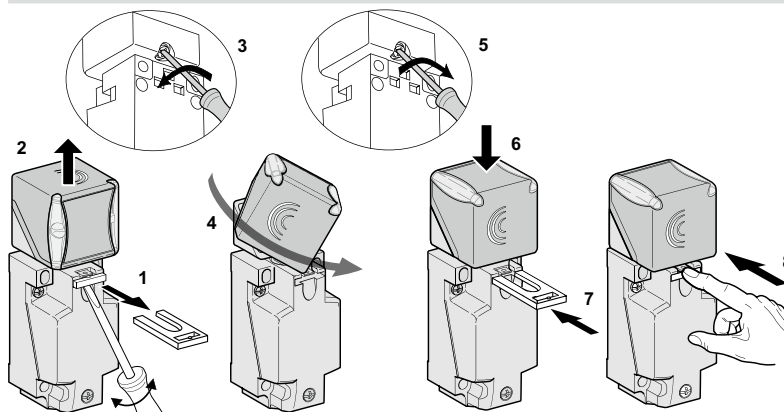

(1) 2 elongated holes $\varnothing 5.3 \times 7$ mm.

Tightening torque of cover fixing screws and clamp screws: < 1.2 N.m


(1) Voltage range only obtained with a load impedance of 1000 Ω .

Inductive proximity sensors


OsiSense XS Application

Cylindrical, stainless steel 316L front face
for food and beverage applications and harsh industrial
environments. Three-wire DC, solid-state output


ECOLAB®




XS912●1PAM12




XS918●1PAM12




XS930●1PAM12

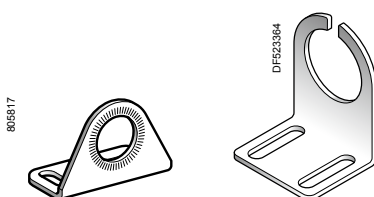


XUZA118



XSZBS30



XZCP1141L●



XZCP1241L●

Ø 12 mm, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{DC}}$, flush mountable					
6	NO	PNP	M12	XS912S1PAM12	0.024

Three-wire 12-24V $\overline{\text{DC}}$, non flush mountable

10	NO	PNP	M12	XS912S4PAM12	0.023
----	----	-----	-----	---------------------	-------

Ø 18 mm, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{DC}}$, flush mountable					
10	NO	PNP	M12	XS918S1PAM12	0.051

Three-wire 12-24V $\overline{\text{DC}}$, non flush mountable

20	NO	PNP	M12	XS918S4PAM12	0.051
----	----	-----	-----	---------------------	-------

Ø 30 mm, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{DC}}$, flush mountable					
20	NO	PNP	M12	XS930S1PAM12	0.140

Three-wire 12-24V $\overline{\text{DC}}$, non flush mountable

40	NO	PNP	M12	XS930S4PAM12	0.145
----	----	-----	-----	---------------------	-------

Accessories

Description	For use with sensor	Reference	Weight kg
Stainless steel mounting bracket	Ø 12	XSZBS12	0.090
	Ø 18	XUZA118	0.190
	Ø 30	XSZBS30	0.370

Connecting cables (PVC) ⁽¹⁾


Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin Stainless steel clamping ring	Straight	2	XZCPA1141L2	0.090
		5	XZCPA1141L5	0.190
		10	XZCPA1141L10	0.370
	Elbowed	2	XZCPA1241L2	0.090
		5	XZCPA1241L5	0.190
		10	XZCPA1241L10	0.370

Wiring schemes

M12 connector



PNP



(1) For further information, please consult the catalogue "Cabling accessories OsiSense XZ" on our site www.tesensors.com.

Inductive proximity sensors

OsiSense XS Application

Cylindrical, stainless steel 316L front face
for food and beverage applications and harsh industrial
environments. Three-wire DC, solid-state output

Characteristics					
Sensor type	Flush		XS912S1PAM12	XS918S1PAM12	XS930S1PAM12
	Non flush		XS912S4PAM12	XS918S4PAM12	XS930S4PAM12
Product certifications			CE, cULus		
Connection	Connector		M12		
Operating zone	Flush	mm	0...4.8	0...8	0...16
	Non flush	mm	0...8	0...16	0...32
Differential travel		%	1...15 (real sensing distance Sr)		
Degree of protection	Conforming to IEC 60529		IP 68 (5 meters underwater for 1 month)		
	Conforming to DIN 40050		IP 69K		
Storage temperature		°C	-25...+ 85 (-13...185°F)		
Operating temperature		°C	-25...+ 85 (-13...185°F)		
Materials	Case		Stainless steel, 316L grade		
Front face thickness		mm	0.4	0.6	1.0
Mechanical shock resistance	Conforming to EN 50102		IK10		
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 1 mm (f = 10 to 55 Hz)		
Shock resistance	Conforming to IEC 60068-2-27		30 gn, duration 11 ms		
Output state indication			Yellow LED, 4 viewing points at 90° (blinking from 0.8 Sr and Sr)		
Rated supply voltage		V	12...24 with protection against reverse polarity		
Voltage limits (including ripple)		V	10...30		
Switching capacity		mA	≤ 200 with overload and short-circuit protection		
Voltage drop, closed state		V	≤ 2		
Current consumption, no-load		mA	≤ 10		
Maximum switching frequency	Flush	Hz	600	300	100
	Non flush	Hz	400	200	90
Delays	First set-up	ms	40		
	Response	µs	0.06		
	Recovery	µs	15		

Setting-up


Minimum mounting distances in mm, flush version

Side by side		Face to face	Facing a metal object	Mounted in a metal support
Ø 12	e ≥ 38	e ≥ 30	e ≥ 20	d ≥ 24
Ø 18	e ≥ 42	e ≥ 40	e ≥ 30	d ≥ 50
Ø 30	e ≥ 80	e ≥ 70	e ≥ 60	d ≥ 90

Minimum mounting distances in mm, non flush version

Side by side		Face to face	Facing a metal object	Mounted in a metal support
Ø 12	e ≥ 108	e ≥ 40	e ≥ 30	d ≥ 30 h ≥ 22
Ø 18	e ≥ 182	e ≥ 70	e ≥ 60	d ≥ 60 h ≥ 34
Ø 30	e ≥ 270	e ≥ 130	e ≥ 120	d ≥ 120 h ≥ 34

Dimensions



Lengths (mm):
 a = overall
 b = threaded
 c = for non flush
 mountable sensors


	Flush sensor			Non flush sensor		
	M12	M18	M30	M12	M18	M30
a (mm)	60	63.5	63.5	60	63.5	63.5
b (mm)	41	42	42	36	35	32
c (mm)	0	0	0	5	7	10

Reduction coefficient


Flush-non mounted		Flush sensor			Non flush sensor		
		M12	M18	M30	M12	M18	M30
Steel		1	1	1	1	1	1
Aluminum		1	1	1	1	1	1
Brass		1.3	1.2	1.3	1.4	1.35	1.2
Copper		0.85	0.8	0.9	0.8	0.9	0.9
Stainless steel	Thickness 1 mm	0.5	0.5	0.35	(1)	0.3	(1)
	Thickness 2 mm	0.9	0.9	0.7	0.66	0.6	0.25
Flush mounted		M12	M18	M30	(1) No detection.		
Steel		0.7	0.75	0.9			
Aluminum		1.15	0.9	0.7			
Brass		1.05	0.75	0.6			
Stainless steel		0.8	0.8	1.3			

Inductive proximity sensors


OsiSense XS Application, food and beverage processing series
Cylindrical, stainless steel, non flush mountable
Three-wire DC, solid-state output




XS212SA...L2




XS218SA...M12




XS2L2SA...L2




XS230SA...L2




XUZH2005



XSZBS12



XUZA118



XSZBS30

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
7	NO	PNP	Pre-cabled (L = 2 m) (1)	XS212SAPAL2	0.075
			M12 connector	XS212SAPAM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS212SANAL2	0.075
			M12 connector	XS212SANAM12	0.035

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
12	NO	PNP	Pre-cabled (L = 2 m) (1)	XS218SAPAL2	0.120
			M12 connector	XS218SAPAM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	XS218SANAL2	0.120
			M12 connector	XS218SANAM12	0.060

Ø 18, plain

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
12	NO	PNP	Pre-cabled (L = 2 m) (1)	XS2L2SAPAL2	0.120
			M12 connector	XS2L2SAPAM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	XS2L2SANAL2	0.120
			M12 connector	XS2L2SANAM12	0.060

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
22	NO	PNP	Pre-cabled (L = 2 m) (1)	XS230SAPAL2	0.205
			M12 connector	XS230SAPAM12	0.145
		NPN	Pre-cabled (L = 2 m) (1)	XS230SANAL2	0.205
			M12 connector	XS230SANAM12	0.145

Accessories (2)

Description	For use with	Reference	Weight kg
Plastic fixing clamp, 24.1 mm centres, with locking screw	Ø 18 sensor, plain case	XUZH2005	0.007
Stainless steel fixing bracket	Ø 12 sensor	XSZBS12	0.060
	Ø 18 sensor	XUZA118	0.045
	Ø 30 sensor	XSZBS30	0.080

Connecting cables

Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin, stainless steel clamping ring	Straight	2	XZCPA1141L2	0.090
		5	XZCPA1141L5	0.210
		10	XZCPA1141L10	0.410
	Elbowed	2	XZCPA1241L2	0.090
		5	XZCPA1241L5	0.210
		10	XZCPA1241L10	0.410
M12 jumper cable Male, 3-pin, stainless steel clamping ring	Straight	2	XZCRA151140A2	0.095
		5	XZCRA151140A5	0.200

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS212SAPAL2 becomes XS212SAPAL5 with a 5 m long cable.

(2) For further information, see page 128.

Characteristics				
Sensor type			XS2●●SA●●M12	XS2●●SA●●L2
Product certifications/approvals			UL, CSA, CE	
Connection	Connector		M12	–
	Pre-cabled		–	Length: 2 m
Operating zone	Ø 12	mm	0...5.6	
	Ø 18	mm	0...9.6	
	Ø 30	mm	0...17.6	
Differential travel		%	1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529		IP 67	IP 68, double insulation III
	DIN 40050		IP 69K	
Storage temperature		°C	- 40...+ 85 (1)	
Operating temperature		°C	- 25...+ 85	
Materials	Case		Stainless steel 316 L	
	Cable		–	Non-poisonous PVC, 3 x 0.34 mm²
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms	
Output state indication			Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V	12...24 with protection against reverse polarity	
Voltage limits (including ripple)		V	10...36	
Switching capacity		mA	≤ 200 with overload and short-circuit protection	
Voltage drop, closed state		V	≤ 2	
Current consumption, no-load		mA	≤ 10	
Maximum switching frequency	XS212SA●●●●	Hz	2500	
	XS218SA●●●● and XS2L2●●●●	Hz	1000	
	XS230SA●●●●	Hz	500	
Delays	First-up	ms	≤ 10	
	Response	ms	≤ 0.2 Ø 12, ≤ 0.3 Ø 18, ≤ 0.6 Ø 30	
	Recovery	ms	≤ 0.2 Ø 12, ≤ 0.7 Ø 18, ≤ 1.4 Ø 30	


(1) + 100 °C for cleaning and sterilization phases whilst not in service.

Wiring schemes

Connector	Pre-cabled	PNP	NPN
M12 4	BU: Blue BN: Brown BK: Black		

Setting-up

Minimum mounting distances (mm)

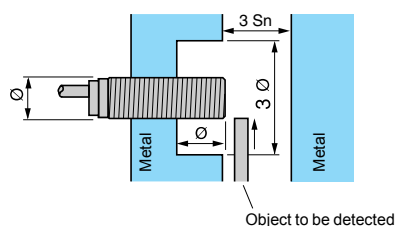

	Side by side	Face to face	Facing a metal object
Ø 12	e ≥ 48	e ≥ 84	e ≥ 21
Ø 18	e ≥ 72	e ≥ 144	e ≥ 36
Ø 30	e ≥ 120	e ≥ 264	e ≥ 66

Dimensions

XS2

(1) LED

XS2	Pre-cabled (mm)		Connector (mm)		
	a	b	a	b	c
Ø 12	54.5	38	61	37	5
Ø 18	60	40	70	42	8
Ø 30	62.5	41	70	36	13

XSZBS12


XUZA118

XSZBS30


Ø: 2 elongated holes Ø 4.8 x 12.7

Inductive proximity sensors


OsiSense Application, food and beverage processing series
Cylindrical, stainless steel, non flush mountable
Two-wire AC or DC




XS218SAM•L2




XS218SAM•U20



XS230SAM•L2



XUZA118



XSZBS30

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
12	NO	Pre-cabled (L = 2 m) (1)	XS218SAMAL2	0.120
		1/2"-20UNF connector	XS218SAMAU20	0.060

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
22	NO	Pre-cabled (L = 2 m) (1)	XS230SAMAL2	0.205
		1/2"-20UNF connector	XS230SAMAU20	0.145

Connecting cables

Description	Type	Length m	Reference	Weight kg
Pre-wired connectors 1/2"-20UNF 3-pin female, stainless steel clamping ring	Straight	5	XZCPA1865L5	0.210
		10	XZCPA1865L10	0.410
	Elbowed	5	XZCPA1965L5	0.250
		10	XZCPA1965L10	0.485

Accessories (2)

Description	For use with	Reference	Weight kg
Stainless steel fixing bracket	Ø 18 sensor	XUZA118	0.045
	Ø 30 sensor	XSZBS30	0.080

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: **XS218SAMAL2** becomes **XS218SAMAL5** with a 5 m long cable.


(2) For further information, see page 128.

Characteristics			
Sensor type		XS2●●SAM●U20	XS2●●SAM●L2
Product certifications/approvals		UL, CSA, CE	
Connection	Connector	1/2"-20UNF	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 18	mm 0...9.6	
	Ø 30	mm 0...17.6	
Differential travel		% 1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 67	IP 68, double insulation □
	DIN 40050	IP 69K	
Storage temperature		°C - 40...+ 85 (1)	
Operating temperature		°C - 25...+ 85	
Materials	Case	Stainless steel 316 L	
	Cable	—	Non-poisonous PVC, 2 x 0.34 mm ²
Vibration resistance		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance		50 gn, duration 11 ms	
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V ~ or — 24...240 (~ 50/60 Hz)	
Voltage limits (including ripple)		V ~ or — 20...264	
Switching capacity		mA ~ 5...300 or — 5...200 (2)	
Voltage drop, closed state		V ≤ 5.5	
Residual current, open state		mA ≤ 0.8	
Maximum switching frequency	XS218SAM●●●	Hz ~ 25 or — 1000	
	XS230SAM●●●	Hz ~ 25 or — 300	
Delays	First-up	ms ≤ 30	
	Response	ms ≤ 0.5	
	Recovery	ms ≤ 0.5 XS218SAM●●●, ≤ 2 XS230SAM●●●	

(1) + 100 °C for cleaning and sterilization phases whilst not in service.



(2) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes

Connector	Pre-cabled	2-wire ~ or —
1/2"-20UNF	BU: Blue BN: Brown	NO output
 AC/DC: 2 ⊕ : 1 AC/DC: 3		
⊕: on connector models only		

Setting-up

Minimum mounting distances (mm)

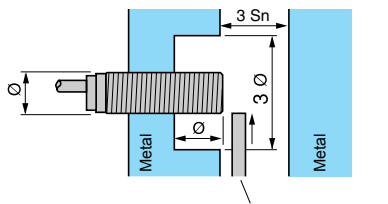			
	Side by side	Face to face	Facing a metal object
Ø 18	e ≥ 72	e ≥ 144	e ≥ 36
Ø 30	e ≥ 120	e ≥ 264	e ≥ 66

Dimensions

<


Ø: 2 elongated holes Ø 7.14 x 29.36

Inductive proximity sensors


OsiSense Application, food and beverage processing series

Cylindrical, plastic, non flush mountable


Three-wire DC, solid-state output




XS2...AA...L2



XS2...AA...M12



XS230AA...L2



XSZB...

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
7	NO	PNP	Pre-cabled (L = 2 m) (1)	XS212AAPAL2	0.065
			M12 connector	XS212AAPAM12	0.030
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS212AANAL2	0.065
			M12 connector	XS212AANAM12	0.030

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
12	NO	PNP	Pre-cabled (L = 2 m) (1)	XS218AAPAL2	0.100
			M12 connector	XS218AAPAM12	0.040
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS218AANAL2	0.100
			M12 connector	XS218AANAM12	0.040

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
22	NO	PNP	Pre-cabled (L = 2 m) (1)	XS230AAPAL2	0.140
			M12 connector	XS230AAPAM12	0.080
	NPN	NPN	Pre-cabled (L = 2 m) (1)	XS230AANAL2	0.140
			M12 connector	XS230AANAM12	0.080

Accessories (2)

Description		Reference	Weight kg
Fixing clamps	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

Connecting cables

Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin, stainless steel clamping ring	Straight	2	XZCPA1141L2	0.090
		5	XZCPA1141L5	0.190
		10	XZCPA1141L10	0.370
	Elbowed	2	XZCPA1241L2	0.090
		5	XZCPA1241L5	0.190
		10	XZCPA1241L10	0.370
M12 jumper cable Male, 3-pin, stainless steel clamping ring	Straight	2	XZCRA151140A2	0.090
		5	XZCRA151140A5	0.190

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: **XS212AAPAL2** becomes **XS212AAPAL5** with a 5 m long cable.

(2) For further information, see page 128.


Characteristics			
Sensor type		XS2...AA...M12	XS2...AA...L2
Product certifications/approvals		UL, CSA, CE	
Connection	Connector	M12	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 12	mm	0...5.6
	Ø 18	mm	0...9.6
	Ø 30	mm	0...17.6
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 67	IP 68, double insulation □
	DIN 40050	IP 69K	
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 85
Materials	Case	PPS	
	Cable	—	PvR and 3 x 0.34 mm ²
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms
Output state indication		Yellow LED: annular	
Rated supply voltage		V	— 12...48 for T - 25...+ 85 °C
Voltage limits (including ripple)		V	— 10...58 for T - 25...+ 85 °C
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	XS212AA...●●●●	Hz	2500
	XS218AA...●●●●	Hz	1000
	XS230AA...●●●●	Hz	500
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.2 Ø 12, ≤ 0.3 Ø 18, ≤ 0.6 Ø 30
	Recovery	ms	≤ 0.2 Ø 12, ≤ 0.7 Ø 18, ≤ 1.4 Ø 30

Wiring schemes

Connector	Pre-cabled	PNP	NPN
	BU: Blue BN: Brown BK: Black		


Setting-up

Minimum mounting distances (mm)

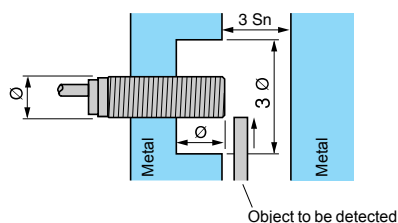

	Side by side	Face to face	Facing a metal object
Ø 12	e ≥ 48	e ≥ 84	e ≥ 21
Ø 18	e ≥ 72	e ≥ 144	e ≥ 36
Ø 30	e ≥ 120	e ≥ 264	e ≥ 66

Dimensions




XS2	Pre-cabled (mm)		Connector (mm)	
	a	b	a	b
Ø 12	50	42	61	43
Ø 18	60	51	70	52
Ø 30	60	51	70	52

Inductive proximity sensors


OsiSense XS Application, food and beverage processing series

Cylindrical, plastic, non flush mountable


Two-wire AC or DC




XS2●●AAM●L2



XS2●●AAM●U20



XS230AAM●L2



XSZB1●●

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
12	NO	Pre-cabled (L = 2 m) (1)	XS218AAMAL2	0.100
		1/2"-20UNF connector	XS218AAMAU20	0.040

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
22	NO	Pre-cabled (L = 2 m) (1)	XS230AAMAL2	0.140
		1/2"-20UNF connector	XS230AAMAU20	0.080

Accessories (2)

Description		Reference	Weight kg
Fixing clamps	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

Connecting cables

Description	Type	Length m	Reference	Weight kg
Pre-wired connectors 1/2"-20UNF 3-pin female, stainless steel 316 L clamping ring	Straight	5	XZCPA1865L5	0.180
		10	XZCPA1865L10	0.350
	Elbowed	5	XZCPA1965L5	0.180
		10	XZCPA1965L10	0.350

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: **XS218AAMAL2** becomes **XS218AAMAL5** with a 5 m long cable.

(2) For further information, see page 128.

Inductive proximity sensors

OsiSense XS Application, food and beverage processing series


Cylindrical, plastic, non flush mountable

Two-wire AC or DC




Characteristics			
Sensor type		XS2●●AAM●U20	XS2●●AAM●L2
Product certifications/approvals		UL, CSA, CE	
Connection	Connector	1/2"-20UNF	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 18	mm 0...9.6	
	Ø 30	mm 0...17.6	
Differential travel		% 1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 67	IP 68, double insulation □
	DIN 40050	IP 69K	
Storage temperature		°C - 40...+ 85	
Operating temperature		°C - 25...+ 85	
Materials	Case	PPS	
	Cable	—	PvR and 2 x 0.34 mm ²
Vibration resistance		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance		50 gn, duration 11 ms	
Output state indication		Yellow LED: annular	
Rated supply voltage		V ~ or 24...240 (~ 50/60 Hz)	
Voltage limits (including ripple)		V ~ or 20...264	
Switching capacity		mA ~ 5...300 or 5...200 (1)	
Voltage drop, closed state		V ≤ 5.5	
Residual current, open state		mA ≤ 0.8	
Maximum switching frequency	XS218AAM●●●	Hz ~ 25 or 1000	
	XS230AAM●●●	Hz ~ 25 or 300	
Delays	First-up	ms ≤ 30	
	Response	ms ≤ 0.5	
	Recovery	ms ≤ 0.5 XS218AAM●●●, ≤ 2 XS230AAM●●●	

(1) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes


Connector	Pre-cabled	2-wire ~ or 240V
1/2"-20UNF	BU: Blue BN: Brown	NO output
		

Setting-up

Minimum mounting distances (mm)			
			
	Side by side	Face to face	Facing a metal object
Ø 18	$e \geq 72$	$e \geq 144$	$e \geq 36$
Ø 30	$e \geq 120$	$e \geq 264$	$e \geq 66$

Dimensions

XS2



(1) LED

XS2	Pre-cabled (mm)		Connector (mm)	
	a	b	a	b
Ø 18	60	51	70	52
Ø 30	60	51	70	52


Inductive proximity sensors

OsiSense XS Application


Cylindrical, stainless steel 303 front face

for harsh industrial environments


Three-wire DC, solid-state output




XS908●1PAM12




XS912●1PAM12




XS918●1PAM12



XS930●1PAM12



XZCP1141L●



XZCP1241L●

Ø 8 mm, threaded M8 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
3	NO	PNP	M12	XS908R1PAM12	0.018

Three-wire 12-24V $\overline{\text{V}}$, non flush mountable

6	NO	PNP	M12	XS908R4PAM12	0.018
---	----	-----	-----	--------------	-------

Ø 12 mm, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
6	NO	PNP	M12	XS912R1PAM12	0.024

Three-wire 12-24V $\overline{\text{V}}$, non flush mountable

10	NO	PNP	M12	XS912R4PAM12	0.023
----	----	-----	-----	--------------	-------

Ø 18 mm, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
10	NO	PNP	M12	XS918R1PAM12	0.044

Three-wire 12-24V $\overline{\text{V}}$, non flush mountable

20	NO	PNP	M12	XS918R4PAM12	0.051
----	----	-----	-----	--------------	-------

Ø 30 mm, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
20	NO	PNP	M12	XS930R1PAM12	0.140

Three-wire 12-24V $\overline{\text{V}}$, non flush mountable

40	NO	PNP	M12	XS930R4PAM12	0.144
----	----	-----	-----	--------------	-------

Connecting cables (PUR) (1)


Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin Metal clamping	Straight	2	XZCP1141L2	0.090
		5	XZCP1141L5	0.190
		10	XZCP1141L10	0.370
	Elbowed	2	XZCP1241L2	0.090
		5	XZCP1241L5	0.190
		10	XZCP1241L10	0.370

Wiring schemes

M12 connector



PNP



(1) For further information, please consult the catalogue "Cabling accessories OsiSense XZ", on our site www.tesensors.com.

Inductive proximity sensors

OsiSense XS Application

Cylindrical, stainless steel 303 front face
for harsh industrial environments

Three-wire DC, solid-state output

Characteristics						
Sensor type	Flush		XS908R1PAM12	XS912R1PAM12	XS918R1PAM12	XS930R1PAM12
	Non flush		XS908R4PAM12	XS912R4PAM12	XS918R4PAM12	XS930R4PAM12
Product certifications			CE, cULus			
Connection	Connector		M12			
Operating zone	Flush	mm	0...2.4	0...4.8	0...8	0...16
	Non flush	mm	0...4.8	0...8	0...16	0...32
Differential travel		%	1...15 (real sensing distance Sr)			
Degree of protection	Conforming to IEC 60529		IP 67	IP 68 (5 meters underwater for 1 month)		
	Conforming to DIN 40050		IP 69K			
Storage temperature		°C	-25...+ 70 (-13...158°F)			
Operating temperature		°C	-25...+ 70 (-13...158°F)			
Materials	Case		Stainless steel, 303 grade			
Front face thickness		mm	0.25	0.4	0.6	1.0
Mechanical shock resistance	Conforming to EN 50102		IK10			
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 1 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27		30 gn, duration 11 ms			
Output state indication			Yellow LED, 4 viewing points at 90° (blinking from 0.8 Sr and Sr)			
Rated supply voltage		V	12...24 with protection against reverse polarity			
Voltage limits (including ripple)		V	10...30			
Switching capacity		mA	≤ 200 with overload and short-circuit protection			
Voltage drop, closed state		V	≤ 2			
Current consumption, no-load		mA	≤ 10			
Maximum switching frequency	Flush	Hz	1000	600	300	100
	Non flush	Hz	700	400	200	90
Delays	First set-up	ms	40			
	Response	µs	0.05	0.06		
	Recovery	µs	23	15		

Setting-up


Minimum mounting distances in mm, flush version

Side by side		Face to face		Facing a metal object		Mounted in a metal support	
Ø 8	e ≥ 14	e ≥ 15		e ≥ 10		d ≥ 12	
Ø 12	e ≥ 38	e ≥ 30		e ≥ 20		d ≥ 24	
Ø 18	e ≥ 42	e ≥ 40		e ≥ 30		d ≥ 50	
Ø 30	e ≥ 80	e ≥ 70		e ≥ 60		d ≥ 90	

Minimum mounting distances in mm, non flush version

Side by side		Face to face		Facing a metal object		Mounted in a metal support	
Ø 8	e ≥ 52	e ≥ 25		e ≥ 20		d ≥ 20	h ≥ 15
Ø 12	e ≥ 108	e ≥ 40		e ≥ 30		d ≥ 30	h ≥ 22
Ø 18	e ≥ 182	e ≥ 70		e ≥ 60		d ≥ 60	h ≥ 34
Ø 30	e ≥ 270	e ≥ 130		e ≥ 120		d ≥ 120	h ≥ 34

Dimensions



Lengths (mm):
a = overall
b = threaded
c = for non flush
mountable sensors

	Flush sensor				Non flush sensor			
	M8	M12	M18	M30	M8	M12	M18	M30
a (mm)	66	60	63.5	63.5	66	60	63.5	63.5
b (mm)	46	41	42	42	42	36	35	32
c (mm)	0	0	0	0	4	5	7	10

Reduction coefficient

Non flush mounted		Flush sensor				Non flush sensor			
		M8	M12	M18	M30	M8	M12	M18	M30
Steel		1	1	1	1	1	1	1	1
Aluminum		1	1	1	1	1	1	1	1
Brass		1.35	1.3	1.2	1.3	1.4	1.4	1.35	1.2
Copper		0.9	0.85	0.8	0.9	0.85	0.8	0.9	0.9
Stainless steel	Thickness 1 mm	0.3	0.5	0.5	0.35	0.3	(1)	0.3	(1)
	Thickness 2 mm	0.6	0.9	0.9	0.7	0.9	0.66	0.6	0.25
Flush mounted		M8	M12	M18	M30	(1) No detection.			
Steel		1	0.7	0.75	0.9				
Aluminum		0.9	1.15	0.9	0.7				
Brass		0.9	1.05	0.75	0.6				
Stainless steel		1	0.8	0.8	1.3				

Inductive proximity sensors

OsiSense XS Application

For assembly, packaging and light material handling

Plastic case, 12 x 26 x 40 mm

DC supply, solid-state output

Sensor		Flush mountable in metal			Non flush mountable in metal		
Nominal sensing distance (Sn)		2 mm			4 mm		
References							
3-wire	PNP NO	XS7G12PA140	–	XS7G12PA140S	XS8G12PA140	–	XS8G12PA140S
	NPN NO	XS7G12NA140	–	XS7G12NA140S	XS8G12NA140	–	XS8G12NA140S
4-wire (complementary outputs)	PNP NO + NC	–	XS7G12PC440	–	–	XS8G12PC440	–
	NPN NO + NC	–	XS7G12NC440	–	–	XS8G12NC440	–
Weight (kg)		0.100	0.100	0.030	0.100	0.100	0.030
Characteristics							
Product certifications		CSA, UL, CE					
Connection	Pre-cabled	3 x 0.34 mm², length 2 m (1)	4 x 0.34 mm², length 2 m (1)	–	3 x 0.34 mm², length 2 m (1)	4 x 0.34 mm², length 2 m (1)	–
	Connector	–	–	M8	–	–	M8
Operating zone		0...1.6 mm			0...3.2 mm		
Repeat accuracy		≤ 10 % of Sr					
Differential travel		3...20 % of Sr					
Degree of protection		IP 67					
Storage temperature		- 40...+ 85 °C					
Operating temperature		- 25...+ 70 °C					
Materials		Case: PBT, cable: PVC					
Vibration resistance Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)					
Shock resistance Conforming to IEC 60068-2-27		50 gn, duration 11 ms					
Output state indication		Yellow LED (on top of case)					
Rated supply voltage		12...24 V	12...48 V	12...24 V	12...24 V	12...48 V	12...24 V
Voltage limits (including ripple)		10...30 V	10...58 V	10...30 V	10...30 V	10...58 V	10...30 V
Current consumption, no-load		≤ 10 mA					
Switching capacity		0...100 mA (2)	0...200 mA (2)	0...100 mA (2)	0...100 mA (2)	0...200 mA (2)	0...100 mA (2)
Voltage drop, closed state		≤ 1.8 V	≤ 2.6 V	≤ 1.8 V	≤ 1.8 V	≤ 2.6 V	≤ 1.8 mA
Maximum switching frequency		≤ 2 kHz			≤ 1 kHz		
Delays	First-up	≤ 4 ms					
	Response	≤ 0.5 ms					
	Recovery	≤ 1 ms					

(1) Sensors available with other cable lengths:

Length of cable	Suffix to be added to references stated above for 2 m pre-cabled sensors	Weight increase
5 m	L1	0.120 kg
10 m	L2	0.320 kg

Example: sensor XS7G12PA140 with 5 m long cable becomes XS7G12PA140L1.

(2) With overload and short-circuit protection

Inductive proximity sensors

OsiSense XS Application


For assembly, packaging and light material handling

Plastic case, 12 x 26 x 40 mm


DC supply, solid-state output

Dimensions

XS● G12●A140, XS● G12●C440

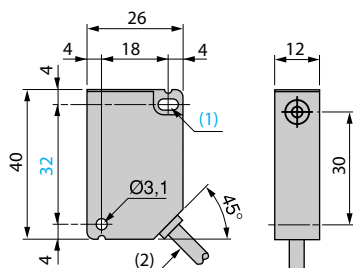

Rear view




(1) 1 elongated hole $\varnothing 3.1 \times 5.1$.


(2) Cable L = 2 m.

(3) 2 holes M3 x 5.

XS● G12●A140S

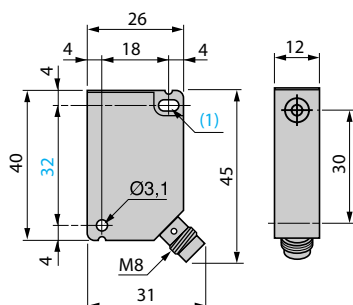

Rear view






(1) 1 elongated hole $\varnothing 3.1 \times 5.1$.

(2) 2 holes M3 x 5.

Setting-up

Minimum mounting distances (mm)



Side by side

Face to face

Facing a metal object and mounting in a metal support

XS7G flush mountable

$e \geq 0$

$e \geq 15$

$e \geq 6$

XS8G non flush mountable



$e \geq 10$

$e \geq 60$



$e \geq 12$

Wiring schemes

3-wire ---, NO output



4-wire ---, NO + NC output



Connector

M8





Inductive proximity sensors

OsiSense XS Application

For assembly, packaging and light material handling

Plastic case, 12 x 26 x 40 mm

AC or DC supply

Sensor		Flush mountable in metal	Non flush mountable in metal
			
Nominal sensing distance (Sn)		2 mm	4 mm
References			
2-wire $\overline{\text{---}}$ or $\sim$	NO	XS7G12MA230	XS8G12MA230
	NC	XS7G12MB230	XS8G12MB230
Weight (kg)		0.100	0.100
Characteristics			
Product certifications		CSA, UL, CEC	
Connection		Pre-cabled, 2 x 0.34 mm ² , length 2 m (1)	
Operating zone		0...1.6 mm	0...3.2 mm
Repeat accuracy		≤ 10 % of Sr	
Differential travel		3...20 % of Sr	
Degree of protection		IP 67	
Storage temperature		- 40...+ 85 °C	
Operating temperature		- 25...+ 70 °C	
Materials		Case: PBT, cable: PVC	
Vibration resistance		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance		50 gn, duration 11 ms	
Conforming to IEC 60068-2-6			
Output state indication		Yellow LED (on top of case)	
Rated supply voltage		$\sim$ 24...240 V (50/60 Hz) or $\overline{\text{---}}$ 24...210 V	
Voltage limits (including ripple)		$\sim$ or $\overline{\text{---}}$ 20...264 V	
Switching capacity		5...200 mA (2)	
Voltage drop, closed state		≤ 5.5 V	
Residual current, open state		≤ 0.8 mA/24 V, 1.5 mA/120 V	
Maximum switching frequency		$\sim$ 25 Hz or $\overline{\text{---}}$ 250 Hz	
Delays	First-up	≤ 40 ms	
	Response	≤ 1 ms	
	Recovery	≤ 2 ms	

(1) Sensors available with other cable lengths:

Length of cable	Suffix to be added to references stated above for 2 m pre-cabled sensors	Weight increase
5 m	L1	0.120 kg
10 m	L2	0.320 kg

Example: sensor **XS7G12MA230** with 5 m long cable becomes **XS7G12MA230L1**.

(2) These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Inductive proximity sensors

OsiSense XS Application


For assembly, packaging and light material handling

Plastic case, 12 x 26 x 40 mm


AC or DC supply

Dimensions

XS●G12M●230

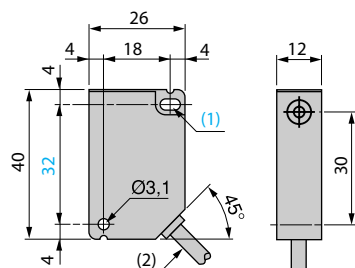

Rear view






(1) 1 elongated hole $\varnothing 3.1 \times 5.1$.

(2) Cable $L = 2\text{ m}$.

(3) 2 holes $M3 \times 5$.

Setting-up


Minimum mounting distances (mm)



	Side by side	Face to face	Facing a metal object and mounting in a metal support
XS7G flush mountable	$e \geq 0$	$e \geq 15$	$e \geq 6$
XS8G non flush mountable	$e \geq 10$	$e \geq 60$	$e \geq 12$

Wiring schemes

2-wire $\sim$ or --- , NO or NC output




Inductive proximity sensors

OsiSense XS Application

Flat sensor, flush mountable, increased range, switching capacity 300 mA

80 x 80 x 40 format, DIN rail mounting, solid-state output

Sensor	Flush mountable in metal
--------	--------------------------



Dimensions (mm)	80 x 80 x 40
Nominal sensing distance (Sn)	50 mm (not flush mounted: 42 mm)

References		
2-wire $\overline{\text{---}}$ (non polarised)	NO	XS7D1A3CAM12DIN
Weight (kg)		0.374

Characteristics		
Product certifications		CE; CSA, UL: pending
Degree of protection	Conforming to IEC 60529	IP 67, double insulation $\square$
Temperature	Operating	- 25...+ 70 °C
	Storage	- 40...+ 85 °C
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude $\pm$ 2 mm (f = 10 to 55 Hz)
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms
Connection		M12 connector
Operating zone		0...40 mm (not flush mounted: 0...35 mm)
Repeat accuracy		3 % of Sr
Differential travel		1...15 % of Sr
Output state indication		Yellow LED
Rated supply voltage		$\overline{\text{---}}$ 12...48 V with protection against reverse polarity
Voltage limits (including ripple)		$\overline{\text{---}}$ 10...58 V
Residual current, open state		$\leq$ 0.5 mA
Switching capacity		1.5...300 mA with overload and short-circuit protection
Voltage drop, closed state		$\leq$ 4.5 V
Maximum switching frequency		100 Hz
Delays	First-up	$\leq$ 10 ms
	Response	$\leq$ 2 ms
	Recovery	$\leq$ 5 ms

Inductive proximity sensors


OsiSense XS Application

Flat sensor, flush mountable, increased range, switching capacity 300 mA

80 x 80 x 40 format, DIN rail mounting, solid-state output

Dimensions

XS7D1A3CAM12DIN




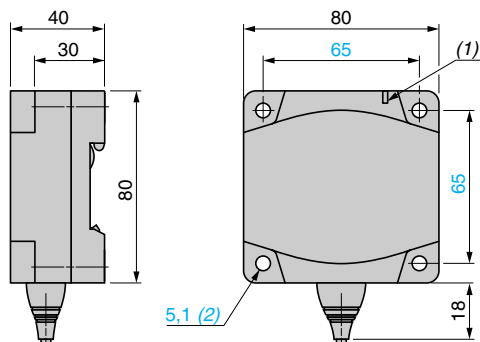


(1) Output LED

(2) For CHC type screws

Setting-up

Minimum mounting distances (mm)

	Face to face	Side by side	Back to back	Facing a metal object
				
Flush mounted	450	140	90	150
Not flush mounted	450	180	180	150

Flush/non flush conditions


In A37 steel



Sn	Su	Sn	Su
42 mm	35 mm	50 mm	40 mm


Wiring schemes

2-wire NO/M12 XS7D1A3CAM12DIN




Inductive proximity sensors


OsiSense XS Application
Cylindrical, stainless steel 303 front face
for welding environments
Three-wire DC, solid-state output




XS912RWPAM12



XS918RWPAM12



XZCP1141L●



XZCP1241L●

Ø 12 mm, threaded M12 x 1					
Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{DC}}$, flush mountable					
6	NO	PNP	M12	XS912RWPAM12	0.024

Ø 18 mm, threaded M18 x 1					
Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{DC}}$, flush mountable					
10	NO	PNP	M12	XS918RWPAM12	0.051

Connecting cables (PUR) ⁽¹⁾				
Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin Metal clamping ring	Straight	2	XZCP1141L2	0.090
		5	XZCP1141L5	0.190
		10	XZCP1141L10	0.370
	Elbowed	2	XZCP1241L2	0.090
		5	XZCP1241L5	0.190
		10	XZCP1241L10	0.370

Wiring schemes	
M12 connector	PNP

(1) For further information, please consult the catalogue "Cabling accessories OsiSense XZ" on our site www.tesensors.com.

Inductive proximity sensors





OsiSense XS Application
Cylindrical, stainless steel 303 front face
for welding environments
Three-wire DC, solid-state output

Characteristics

Sensor type	Flush	XS912RWPAM12	XS918RWPAM12
Product certifications		CE, cULus	
Connection	Connector	M12	
Operating zone		mm	0...4.8
Differential travel		%	1...15 (real sensing distance Sr)
Degree of protection	Conforming to IEC 60529	IP 68 (5 meters underwater for 1 month)	
	Conforming to DIN 40050	IP 69K	
Storage temperature		°C	-25...+70 (-13...158°F)
Operating temperature		°C	-25...+70 (-13...158°F)
Materials	Case	Stainless steel, 303 grade	
Front face thickness		mm	0.4
Mechanical shock resistance	Conforming to EN 50102	IK10	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 1 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	30 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing points at 90° (blinking from 0.8 Sr and Sr)	
Rated supply voltage		V	12...24 with protection against reverse polarity
Voltage limits (including ripple)		V	10...30
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency		Hz	15
Delays	First set-up	ms	80
	Response	µs	100
	Recovery	µs	15


Setting-up

Minimum mounting distances in mm, flush version

Side by side	Face to face	Facing a metal object	Mounted in a metal support
$\frac{\varnothing 12}{\varnothing 18}$ $\frac{e \geq 38}{e \geq 42}$ 	$\frac{e \geq 30}{e \geq 40}$ 	$\frac{e \geq 20}{e \geq 30}$ 	$\frac{d \geq 24}{d \geq 50}$ 

Dimensions

	Flush sensor	
	M12	M18
a (mm)	60	63.5
b (mm)	41	42
c (mm)	0	0



Lengths (mm):
a = overall
b = threaded
c = for non flush
mountable sensors

Reduction coefficient

Non flush mounted		Flush sensor	
		M12	M18
Steel		1	1
Aluminum		1	1
Brass		1.3	1.2
Copper		0.85	0.8
Stainless steel	Thickness 1 mm	0.5	0.5
	Thickness 2 mm	0.9	0.9
Flush mounted		M12	M18
Steel		0.7	0.75
Aluminum		1.15	0.9
Brass		1.05	0.75
Stainless steel		0.8	0.8




Inductive proximity sensors

OsiSense XS Application

Sensors for welding machine applications ⁽¹⁾

Cylindrical type. Metal case, Teflon coated steel, threaded

Sensors flush mountable in metal



Lengths (mm):

a = Overall

b = Threaded section

c = For non flush mountable sensors

a = 60

b = 40

Ø = M12 x 1

a = 60

b = 40

Ø = M18 x 1

	Teflon front face	Teflon front face
Nominal sensing distance (Sn)	2 mm	5 mm

References


3-wire	PNP, NO	XS1M12PAW01D	XS1M18PAW01D
Weight (kg)		0.025	0.060

Characteristics

Product certifications		CE, UL, CSA	
Connection		M12 connector	
Degree of protection	Conforming to IEC 60529	IP 67	
Operating zone		0...1.6 mm	0...4 mm
Repeat accuracy		3 % of Sr	
Differential travel		1...20 % of Sr	
Operating temperature		- 25...+ 70 °C	
Output state indication		Yellow LED, 4 viewing ports at 90°	
Rated supply voltage		12...24 V with protection against reverse polarity	
Voltage limits (including ripple)		10...36 V	
Switching capacity		0...250 mA with overload and short-circuit protection	
Voltage drop, closed state		≤ 2.5 V	
Current consumption, no-load		≤ 15 mA	
Immunity to electromagnetic fields		≤ 140 mT	
Maximum switching frequency		1000 Hz	500 Hz
Delays	First-up	≤ 10 ms	≤ 10 ms
	Response	≤ 0.1 ms	≤ 0.2 ms
	Recovery	≤ 0.4 ms	≤ 0.6 ms

Wiring schemes

M12 connector	3-wire , PNP, NO output
---------------	-------------------------



⁽¹⁾ Sensors particularly resistant to welding machine electromagnetic fields.


Inductive proximity sensors

OsiSense XS Application


Sensors for welding machine applications ⁽¹⁾

Cylindrical type. Metal case, Teflon coated steel, threaded

Sensors non flush mountable in metal



a = 60
b = 40
Ø = M30 x 1.5



a = 60
b = 36
c = 4
Ø = M12 x 1

Teflon front face
10 mm

Teflon front face
4 mm

References

XS1M30PAW01D

XS2M12PAW01D

0.145

0.025

Characteristics

CE, UL, CSA

M12 connector

IP 67

0...8 mm

0...3.2 mm

3 % of Sr

1...20 % of Sr

- 25...+ 70 °C

Yellow LED, 4 viewing ports at 90°

--- 12...24 V with protection against reverse polarity

--- 10...36 V

0...250 mA with overload and short-circuit protection

≤ 2.5 V

≤ 15 mA

≤ 140 mT

250 Hz

1000 Hz

≤ 10 ms

≤ 10 ms

≤ 0.7 ms

≤ 0.2 ms

≤ 5 ms

≤ 0.4 ms

Setting-up




Minimum mounting distances (mm)

Side by side

Face to face

Facing a metal object

Mounted in a metal support



XS1M12 flush mountable

$e \geq 0$

$e \geq 7$

$e \geq 6$

$d \geq 12, h \geq 0$

XS1M18 flush mountable

$e \geq 0$

$e \geq 16$

$e \geq 9$

$d \geq 18, h \geq 0$

XS1M30 flush mountable

$e \geq 0$

$e \geq 20$

$e \geq 20$

$d \geq 30, h \geq 0$

XS2M12 non flush mountable

$e \geq 15$

$e \geq 9$

$e \geq 11$

$d \geq 36, h \geq 8$

Fixing nut tightening torque: XS1M12, XS2M12: < 15 N.m, XS1M18: < 35 N.m, XS1M30: < 50 N.m


Inductive proximity sensors

OsiSense XS Application

For welding machine applications

Cylindrical type. Metal case, plain, with shoulder

Flush mountable in metal



Lengths (mm):

a = Overall

b = To shoulder

c = Removal

d = Shoulder


Ø = 12

a = 55

b = 50

c = 9 (threaded end)

d = 15 hexagonal



Nominal sensing distance (Sn)

3 mm

3 mm

3 mm

References


2-wire --- (non polarised) Terminal connections	1-4	NO	XSLC1401393L1	XSLC1401393L3	XSLC1401393L4
Weight (kg)			0.050	0.065	0.050







Characteristics

Connection	Remote M12 connector on 1.2 m flying lead	Remote M12 connector on 0.8 m flying lead	Remote M12 connector on 0.15 m flying lead
Degree of protection conforming to IEC 60529	IP 67		
Operating zone	0...2.4 mm		
Repeat accuracy	$\leq 3\%$ of Sr		
Differential travel	1...15 % of Sr		
Operating temperature	-25...+80 °C		
Output state indication	Yellow LED, annular		
Rated supply voltage	--- 12...48 V		
Voltage limits (including ripple)	--- 10...58 V		
Switching capacity	1.5...100 mA with overload and short-circuit protection		
Voltage drop, closed state	≤ 4 V		
Residual current, open state	≤ 0.5 mA		
Current consumption, no-load	—		
Maximum switching frequency	800 Hz		
Delays	First-up: ≤ 5 ms; response: ≤ 0.5 ms; recovery: ≤ 0.5 ms		

Wiring schemes

2-wire --- , non polarised, NO output






Flush mountable in metal		Non flush mountable in metal			
					
Ø = 18 a = 40 b = 35 c = 0 (PPS front face) d = Ø 22		Ø = 18 a = 45 b = 35 c = 20 (Teflon front face and case) d = Ø 22			
6.3 mm		10 mm			
10 mm		10 mm			
References					
XSLC1401392L1		XSLC1401405L3			
XSLC1401405L4					
0.100		0.065			
0.050					
Characteristics					
Remote M12 connector on 1.2 m flying lead		Remote M12 connector on 0.8 m flying lead			
Remote M12 connector on 0.15 m flying lead					
IP 67					
0...5 mm		0...8 mm			
3 % of Sr					
1...15 % of Sr					
- 25...+ 70 °C					
Yellow LED, annular					
~ 12...48 V					
~ 10...58 V					
1.5...100 mA with overload and short-circuit protection					
≤ 4 V					
≤ 0.5 mA					
—					
100 Hz					
First-up: ≤ 10 ms; response: ≤ 10 ms; recovery: ≤ 2 ms					
Setting-up					
Minimum mounting distances (mm)					
	Side by side	Face to face	Facing a metal object	Mounted in a metal support	
					
XSLC	Ø 12 (flush mountable)	e ≥ 10	e ≥ 60	e ≥ 15	d = 12, h = 0
	Ø 18 (non flush mountable)	e ≥ 16	e ≥ 96	e ≥ 24	d = 54, h = 16

Inductive proximity sensors

OsiSense XS

Detection at fixed sensing distance. Factor 1 (Fe/Nfe) sensors ⁽¹⁾ for ferrous and non ferrous materials
Solid-state output

Flush mountable in metal



Lengths (mm):
a = Overall
b = Threaded section

a = 60
b = 51.5
Ø = M18 x 1

a = 70
b = 51.5
Ø = M18 x 1

	Brass case	Brass case
Nominal sensing distance (Sn)	5 mm	5 mm

References

4-wire ☐	PNP/PNP programmable NO/NC	XS1M18KPM40	XS1M18KPM40D
Weight (kg)		0.120	0.060

Characteristics

Product certifications		CE, UL, CSA	
Connection		Pre-cabled, PvR 4 x 0.34 mm², length 2 m (2)	M12 connector
Degree of protection	Conforming to IEC 60529	IP 68	IP 67
Operating zone		0...4 mm	
Repeat accuracy		3 % of Sr	
Differential travel		1...15 % of Sr	
Operating temperature		0...+ 50 °C	
Output state indication		Yellow LED, annular	Yellow LED, 4 viewing ports at 90°
Rated supply voltage		--- 12...24 V with protection against reverse polarity	
Voltage limits (including ripple)		--- 10...38 V	
Switching capacity		0...200 mA with overload and short-circuit protection	
Voltage drop, closed state		≤ 2.6 V	
Current consumption, no-load		≤ 15 mA	
Maximum switching frequency		1000 Hz	
Delays	First-up	≤ 10 ms	
	Response	≤ 0.3 ms	
	Recovery	≤ 0.7 ms	

Wiring schemes

M12 connector	Pre-cabled	4-wire ☐, PNP/NPN, NO or NC output
		NO
	BN: brown BU: blue BK: black WH: white	
		NC


(1) The variation in sensing distance between ferrous and non ferrous materials is typically less than 5 %.

(2) Sensors available with other cable lengths: please consult our Customer Care Centre.


Inductive proximity sensors

OsiSense XS

Detection at fixed sensing distance. Factor 1 (Fe/Nfe) sensors ⁽¹⁾ for ferrous and non ferrous materials
Solid-state output



a = 60
b = 51.5
Ø = M30 x 1.5



a = 60
b = 51.5
Ø = M30 x 1.5

Stainless steel case
10 mm

Stainless steel case
10 mm

References

XS1M30KPM40

XS1M30KPM40LD

0.205

0.145

Characteristics

C€, UL, CSA

Pre-cabled, PvR 4 x 0.34 mm², length 2 m ⁽²⁾

M12 connector on 0.8 m flying lead

IP 68

IP 67

0...8 mm

3 % of Sr

1...15 % of Sr

0...+ 50 °C

Yellow LED, annular

--- 12...24 V with protection against reverse polarity

--- 10...38 V

0...200 mA with overload and short-circuit protection

≤ 2.6 V

≤ 15 mA

1000 Hz

≤ 5 ms

≤ 0.3 ms

≤ 0.7 ms

Setting-up


Minimum mounting distances (mm)

Side by side

Face to face

Facing a metal object

Mounted in a metal support

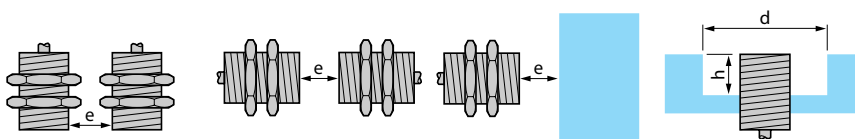

XS1M18 flush mountable

$e \geq 10$

$e \geq 60$

$e \geq 15$

$d \geq 18, h \geq 0$

XS1M30 flush mountable

$e \geq 20$

$e \geq 120$

$e \geq 30$

$d \geq 30, h \geq 0$

Fixing nut tightening torque: XS1M18: < 35 N.m, XS1M30: < 100 N.m

⁽¹⁾ The variation in sensing distance between ferrous and non ferrous materials is typically less than 5 %.



⁽²⁾ Sensors available with other cable lengths: please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS Application

Factor 1 sensors for ferrous or non ferrous material detection and welding applications. Plastic case, 40 x 40 mm front face. 5 position turret head

Sensor	Flush mountable in metal	
Dimensions	40 x 40 x 70 mm	40 x 40 x 117 mm



Nominal sensing distance (Sn)	20 mm
--------------------------------------	-------

References

4-wire	PNP NO+NC	XS9C2A1PCM12	XS9C4A1PCP20 (1)
	NPN NO+NC	XS9C2A1NCM12	XS9C4A1NCP20 (1)


XS9C4●●●P20 sensors are available with an ISO M20 cable entry and can be supplied with a Pg 13.5 (e.g. **XS9C4A1PCG13**) or a 1/2" NPT (e.g. **XS9C4A1PCN12**) cable entry: please consult our Customer Care Centre for more information.

Weight (kg)	0.110	0.220
--------------------	-------	-------

Characteristics

Product certifications	UL, CSA, CE	
Conformity to standards	IEC 60947-5-2	
Connection	M12 connector (4-pin)	Screw terminals, clamping capacity 4 x 1.5 mm ² / 4 x 16 AWG
Operating zone	0...16 mm	
Differential travel	3...15% of Sr	
Repeat accuracy	< 3%	
Immunity to magnetic fields	< 250 mTesla	
Degree of protection	Conforming to IEC 60529 and DIN 40050	IP 65, IP 67 and IP 69K
Temperature	Storage	- 40...+ 85°C
	Operation (2)	- 25...+ 70°C
Material	Case: PBT	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10...55 Hz)
Shock resistance	Conforming to IEC 60068-2-27	50 gn for 11 ms
Indicators	Output state: yellow LED. Supply on: green LED	
Rated supply voltage	4-wire	12...24 V with protection against reverse polarity
Voltage limits (including ripple)	4-wire	10...36 V
Current consumption, no-load	4-wire	< 30 mA
Switching capacity	4-wire	< 200 mA with protection against overload and short-circuit
Voltage drop, closed state	4-wire	< 2 V
Maximum switching frequency	4-wire	250 Hz
Delays	First-up	< 15 ms
	Response	< 2.5 ms
	Recovery	< 2.5 ms

Setting-up

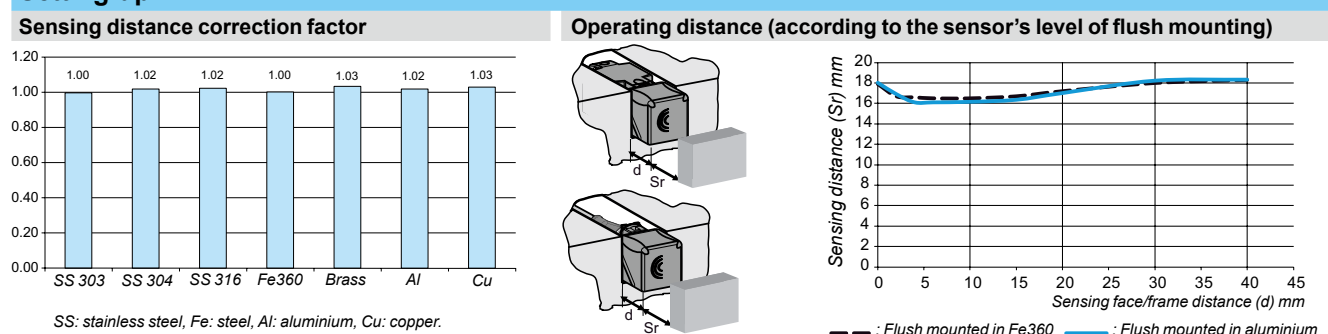

(1) These sensors are supplied without a cable gland. A suitable Pg 13.5 cable gland is available (reference **XSZPE13**).

(2) Sensors are available for very low temperatures (suffix **TF**: - 40°C, + 70°C) or very high temperatures (suffix **TT**: - 25°C, + 85°C); please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS Application

Factor 1 sensors for ferrous or non ferrous material detection and welding applications. Plastic case, 40 x 40 mm front face. 5 position turret head

Setting-up (continued)

Minimum mounting distances (mm)

	Side by side	Face to face	Facing a metal object
Sensors flush mountable in metal	$e \geq 80$	$e \geq 200$	$e \geq 60$



Wiring schemes

M12 connector




- 1: + V
- 2: NC Output
- 3: 0 V
- 4: NO Output


4-wire $\overline{\text{NPN}}$, NO + NC outputs



Accessories



XSZPSC2




XSZPKC2

Description	Use for	Reference	Weight kg
Stainless steel rigid protective cover (only suitable for use when detecting from the top)	Welding	XSZPSC2	0.010
Protective sheet (for sensing face of sensor)	Welding	XSZPKC2	0.010

Sold in lots of 5


Dimensions

XS9C2A1PCM12 and XS9C2A1NCM12

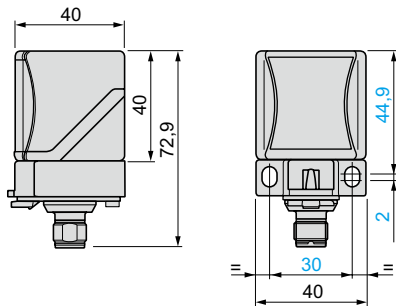


Head positions


XS9C2A1PCM12 and XS9C2A1NCM12

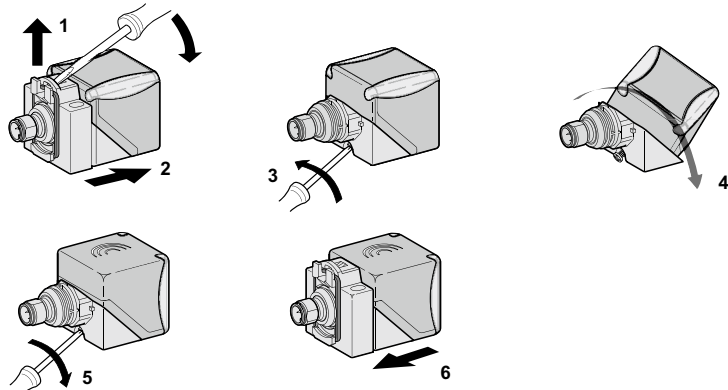

XS9C4A1PCP20 and XS9C4A1NCP20

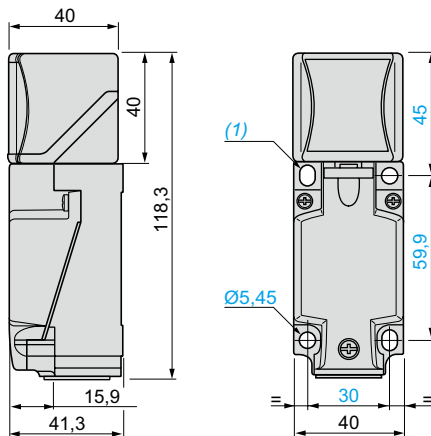

XS9C4A1PCP20 and XS9C4A1NCP20

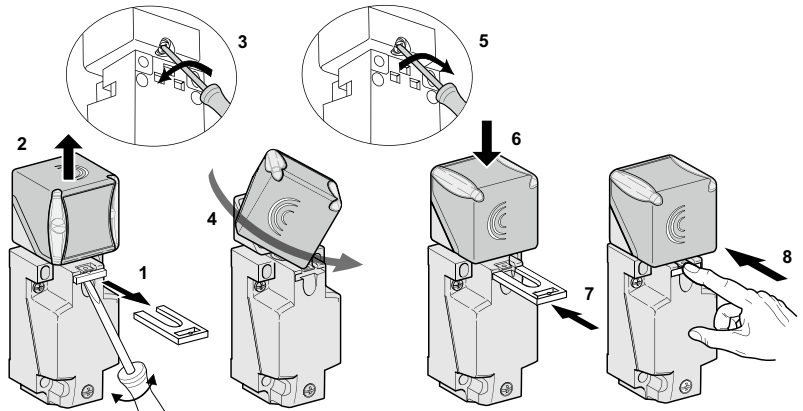

(1) 2 elongated holes $\varnothing 5.3 \times 7$ mm.


Tightening torque of cover fixing screws and clamp screws: $< 1.2 \text{ N.m}$ / $< 10.62 \text{ lb-in}$.

Inductive proximity sensors

OsiSense XS Application

Fixed sensing distance detection, Factor 1 (Fe/Nfe)
sensors ⁽¹⁾ for ferrous and non ferrous materials
Solid-state output

Sensor	Flush mountable in metal
--------	--------------------------



Nominal sensing distance (Sn)	15 mm
-------------------------------	-------

References

4-wire	PNP/NPN/NO/NC programmable	XS7C40KPM40
--------	----------------------------	--------------------

Weight (kg)	0.220
-------------	-------

Characteristics

Product certifications		CE, CSA, UL
Degree of protection	Conforming to IEC 60529	IP 67
Operating temperature		0...+ 50 °C
Connection		Screw terminals, clamping capacity 4 x 0.34 mm ² (2)
Operating zone		0...12 mm
Repeat accuracy		3 % of Sr
Differential travel		1...15 % of Sr
Output state indication		Yellow LED
Rated supply voltage		~ 12...24 V with protection against reverse polarity
Voltage limits (including ripple)		~ 10...36 V
Current consumption, no-load		≤ 15 mA
Switching capacity		0...200 mA with overload and short-circuit protection
Voltage drop, closed state		≤ 2.6 V
Maximum switching frequency		1000 Hz
Delays	First-up	≤ 5 ms
	Response	≤ 0.3 ms
	Recovery	≤ 0.7 ms

(1) The variation in sensing distance between ferrous and non ferrous materials is typically less than 5 %.

(2) Cable gland not included with sensor. For suitable 13P cable gland (XSZPE13), see page 128.


Inductive proximity sensors

OsiSense XS Application

Fixed sensing distance detection, Factor 1 (Fe/Nfe)
sensors ⁽¹⁾ for ferrous and non ferrous materials
Solid-state output

Dimensions

XS7C40KPM40

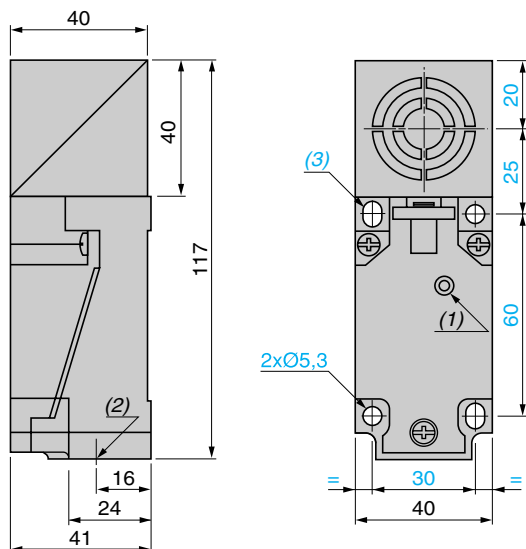


(1) Output LED.

(2) 1 tapped entry for 13P cable gland.

(3) 2 elongated holes Ø 5.3 x 7.

Setting-up

Minimum mounting distances (mm)



Sensor flush mountable in metal	XS7C40KPM40	Side by side	Face to face	Facing a metal object
		$e \geq 40$	$e \geq 120$	$e \geq 45$


Tightening torque of cover fixing screws and clamp screws: < 1.2 N.m

Wiring schemes


PNP/NPN

4-wire $\square$ programmable, NO or NC output

NO output



NC output



Inductive proximity sensors

OsiSense XS Application


Selective detection of ferrous materials

Selective detection of non ferrous materials

Cylindrical type, solid-state output

Flush mountable

Stainless steel case



Nominal sensing distance (Sn)	5 mm
-------------------------------	------

References

3-wire, ferrous version	PNP	NO	XS1M18PAS40
Insensitive to non ferrous materials			
3-wire, non ferrous version	PNP	NO	XS1M18PAS20
Insensitive to ferrous materials			
Weight (kg)	0.120		


Characteristics

Product certifications	UL, CSA, CE
Connection	Pre-cabled, PVR, 3 x 0.34 mm ² , length 2 m (1)
Operating zone	0...4 mm
Degree of protection conforming to IEC 60529	IP 68
Operating temperature	- 25...+ 70 °C
Output state indication	Yellow LED, annular
Rated supply voltage	12...24 V with protection against reverse polarity
Voltage limits (including ripple)	10...38 V
Switching capacity	0...200 mA with overload and short-circuit protection
Voltage drop, closed state	≤ 2.6 V
Residual current, open state	—
Current consumption, no-load	≤ 15 mA
Maximum switching frequency	1000 Hz
Delays	First-up ≤ 10 ms
	Response ≤ 0.3 ms
	Recovery ≤ 0.7 ms

(1) Sensors available with other cable lengths: please consult our Customer Care Centre.


Wiring schemes

3-wire PNP



Dimensions


XS1M



a (mm)	b (mm)
60	51.5


Setting-up

Minimum mounting distances (mm)




Side by side

$e \geq 10$




Face to face

$e \geq 60$



Facing a metal object

$e \geq 15$



Mounted in a metal support

$d \geq 18$, $h \geq 0$ (ferrous metal)
 $d \geq 18$, $h \geq 5$ (non ferrous metal)

XS1M18

Inductive proximity sensors

OsiSense XS Application


Selective detection of ferrous materials

Selective detection of non ferrous materials

Cylindrical type, solid-state output

Flush mountable

Stainless steel case



Nominal sensing distance (Sn)	5 mm
-------------------------------	------

References

3-wire, ferrous version	PNP	NO	XS1M18PAS40D
Insensitive to non ferrous materials			
3-wire, non ferrous version	PNP	NO	XS1M18PAS20D
Insensitive to ferrous materials			
Weight (kg)	0.060		


Characteristics

Product certifications	UL, CSA, CE
Connection	M12 connector
Degree of protection conforming to IEC 60529	IP 67
Operating zone	0...4 mm
Operating temperature	-25...+70 °C
Output state indication	Yellow LED, 4 viewing ports at 90°
Rated supply voltage	12...24 V with protection against reverse polarity
Voltage limits (including ripple)	10...38 V
Switching capacity	0...200 mA with overload and short-circuit protection
Voltage drop, closed state	≤2.6 V
Residual current, open state	—
Current consumption, no-load	≤15 mA
Maximum switching frequency	1000 Hz
Delays	
First-up	≤10 ms
Response	≤0.3 ms
Recovery	≤0.7 ms

Wiring schemes


M12 connector

3-wire PNP



Dimensions


XS1M



a (mm)	b (mm)
70	51.5


Setting-up

Minimum mounting distances (mm)




Side by side

$e \geq 10$




Face to face

$e \geq 60$




Facing a metal object

$e \geq 15$




Mounted in a metal support


$d \geq 18, h \geq 0$ (ferrous metal)
 $d \geq 18, h \geq 5$ (non ferrous metal)




XSZB00




XSZB90




XSZBC10




XSZBE10




XSZBD10




XSZBPM12




XSZB100




XSZA000




XSZP100



XSCZ01



XSZF10



XTAZ30

Mounting and fixing accessories

Description	For use with sensor Type	Diameter (mm)	Unit reference	Weight kg
"Clip" mounting plate Can be mounted without "clip" on threaded holes	XS●J	—	XSZBJ00	0.003
	XS●F	—	XSZBF00	0.005
	XS●E	—	XSZBE00	0.025
	XS●C	—	XSZBC00	0.060
"Clip" 90° mounting bracket Can be mounted without "clip" on threaded holes	XS●J	—	XSZBJ90	0.003
	XS●F	—	XSZBF90	0.005
	XS●E	—	XSZBE90	0.025
	XS●C	—	XSZBC90	0.060
Replacement bracket	XS●E	—	XSZBE10	0.060
	Replaces: XS7T2, XS8T2, XSE			
	XS●C	—	XSZBC10	0.110
	Replaces: XS7T4, XS7C40, XS8T4, XS8C40 and XSC			
	XS●D (for XSD) (1)	—	XSZBD10	0.065
Fixing clamp for remote control	XS9, XS6●●●B2	—	XSZBPM12	0.015
Fixing clamps	XS1	4 (plain)	XSZB104	0.005
		5 (M5 x 0.5)	XSZB105	0.005
	XS1, XS2	6.5 (plain)	XSZB165	0.005
	XS1, XS2, XS4, XS5, XS6	8 (M8 x 1)	XSZB108	0.006
	XS1, XS2, XS4, XS5, XS6, XT1	12 (M12 x 1)	XSZB112	0.006
		18 (M18 x 1)	XSZB118	0.010
		30 (M30 x 1.5)	XSZB130	0.020
		32 (plain)	XUZB32	0.050
	Set of 2 metal fixing nuts, nickel plated	5 (M5 x 0.5)	XSZE105	0.010
		8 (M8 x 1)	XSZE108	0.015
		12 (M12 x 1)	XSZE112	0.015
		18 (M18 x 1)	XSZE118	0.020
Set of 2 stainless steel fixing nuts	XS1, XS2, XS5, XS6	8 (M8 x 1)	XSZE308	0.015
		12 (M12 x 1)	XSZE312	0.015
	XS1, XS2, XT1, XS5, XS6	18 (M18 x 1)	XSZE318	0.020
		30 (M30 x 1.5)	XSZE330	0.050
		30 (M30 x 1.5)	XSZE230	0.005
Set of 2 plastic fixing nuts	XS4	8 (M8 x 1)	XSZE208	0.002
		12 (M12 x 1)	XSZE212	0.003
	XS4	18 (M18 x 1)	XSZE218	0.004
		30 (M30 x 1.5)	XSZE230	0.005
Adaptor collar	Ø 20 XS●, XT●	18 (M18 x 1)	XSZA020	0.005
	Ø 34 XS●, XT●	30 (M30 x 1.5)	XSZA034	0.005

Protection accessories

Cable sleeve adaptor (CNOMO type)	XS●, XT●	12 (M12 x 1)	XSZP112	0.005
		18 (M18 x 1)	XSZP118	0.005
		30 (M30 x 1.5)	XSZP130	0.010
Outer cover (IP 68)	XT7, XS7, XS8 and XS9 – (C format)	—	XSCZ01	0.100
Thread adaptor	XS●, XT●	30 (M30 x 1.5)	XTAZ30	0.035
13P cable gland	Clamping capacity Ø 9 to 12 mm		XSZPE13	0.010
Protective cover	M12 universal connectors		XSZF10	0.020

Sold in lots of 50

Fixings


Threaded inserts for rear fixing	XS●E	M3	XSZVF03	0.002
	XS●C	M4	XSZVF04	0.005
	XS●D	M5	XSZVF05	0.006

Fuses (for unprotected 2-wire ~ sensors)


Description	Type	Sold in lots of	Unit reference	Weight kg
Cartridge fuses 5 x 20	0.4 A "quick-blow"	10	XUZE04	0.001
	0.63 A "quick-blow"	10	XUZE06	0.001
	0.8 A "quick-blow"	10	XUZE08	0.001
Fuse terminal block for XUZE0●		50	AB1FU10135U	0.040

(1) Depth adjustment shim for converting 80 x 80 x 26 mm format to 80 x 80 x 40 mm format. Also enables clipping onto 35 mm omega rail.


XSZBJ00




XSZBF00

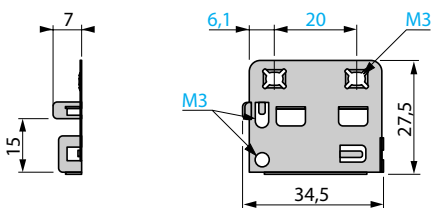

XSZBE00

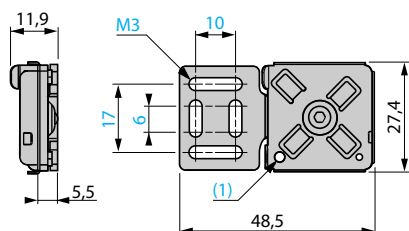


XSZBC00

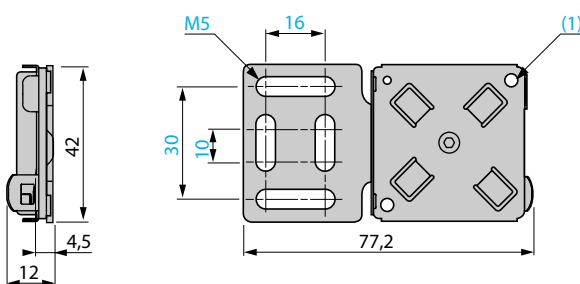


(1) 2 screws M3 x 12 (included).

(1) 4 screws M4 x 14 (included).


XSZBJ90

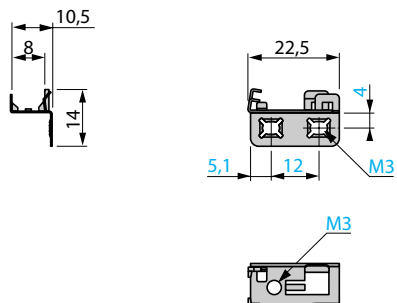


XSZBF90

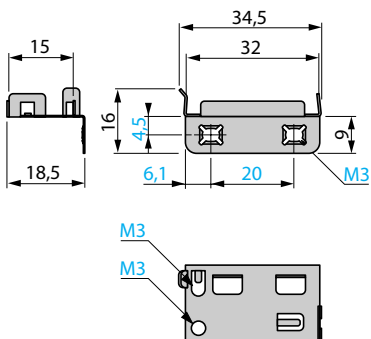

XSZBE90

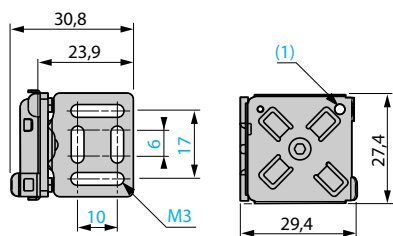


XSZBC90

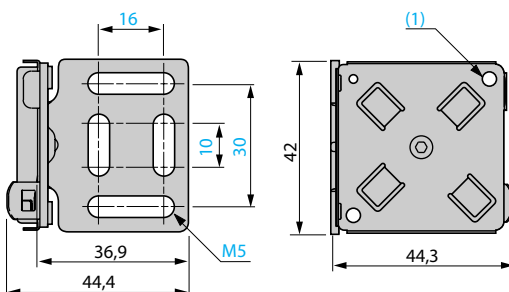


(1) 2 screws M3 x 12 (included).

(1) 4 screws M4 x 14 (included).


XSZBE10

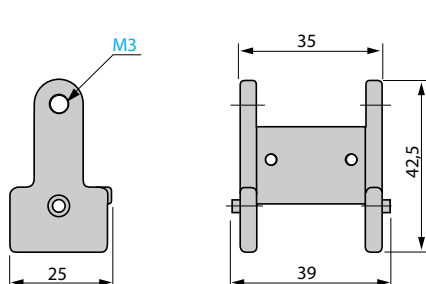


XSZBC10

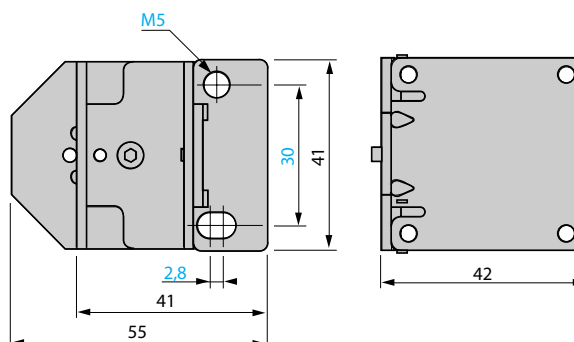


XSZBD10 (for mounting on XS●D●●●●)

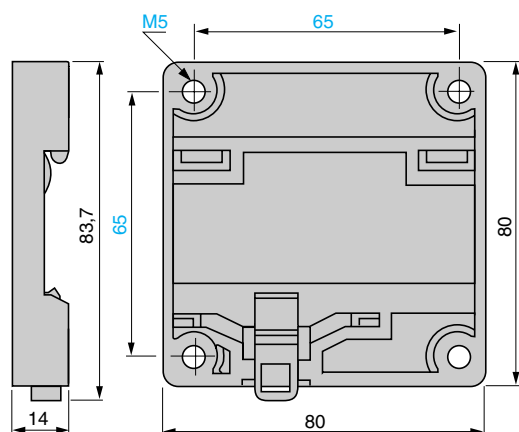


XSZBPM12



XSZB104, B105



XSZB108, B112, B118, B130, B165

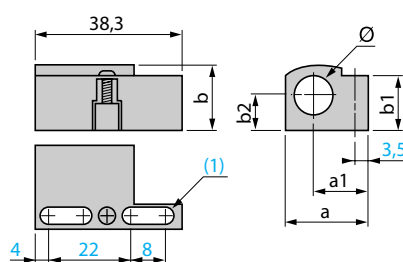


XSZ	a	a1	b	b1	b2	Ø
B108	19.9	14.5	14	12.5	7.5	8
B112	21.9	14.5	16	15.5	8.5	12
B118	26	15.7	22.3	20.1	11.5	18
B130	39	21.7	35.5	31	18.5	30
B165	19.9	14.5	14	12.5	7.5	6.5

(1) 2 elongated holes 4 x 8 mm.

XSZ	Ø
B104	4
B105	5

Note: for fixing clamps XSZB118 and XSZB130, see mounting precautions, page 19.

XUZB32

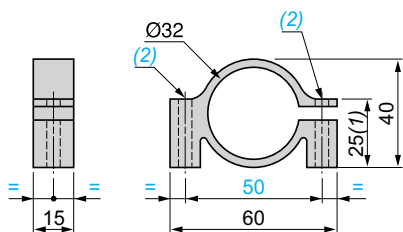


(1) Maximum value


(2) 2 holes Ø 5.5

2 x M5 screws, HM head, included with fixing clamp


XSZA0●●




XSZ	a	a1
A020	Ø18	Ø20
A034	Ø30	Ø34

XSZP112, P118, P130

XSZ	h	Ø d1	Ø d2
P112	7	12	16,8
P118	6,2	18	23
P130	6,2	30	34,4

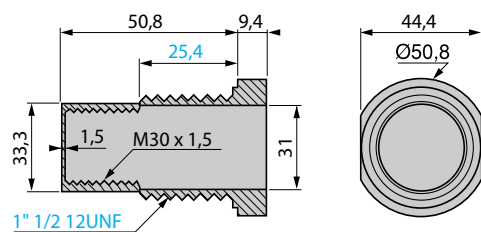XTAZ30


XSCZ01

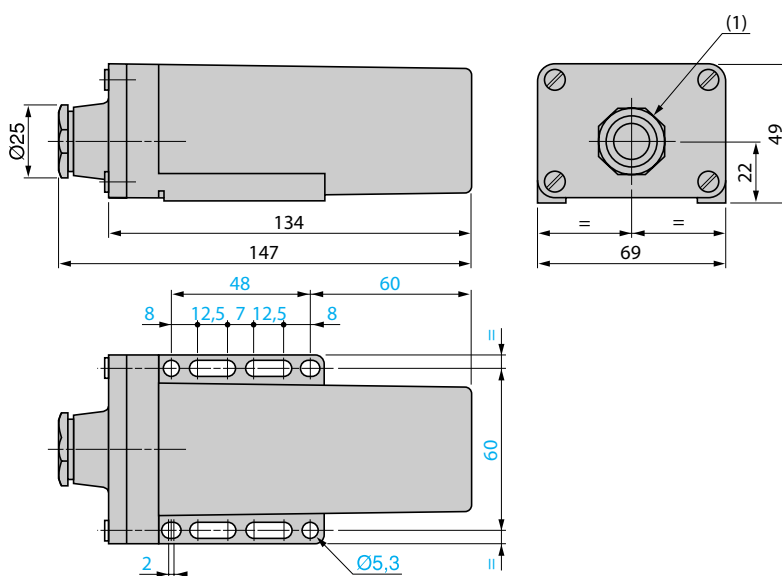

(1) 13P cable gland


Cylindrical type sensors

Flush mountable in metal

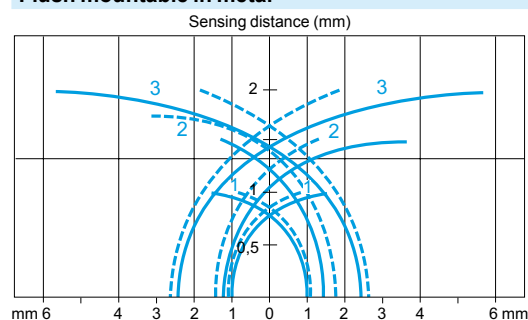

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 4	5 x 5 x 1	0...0.8
Ø 5	5 x 5 x 1	0...0.8
Ø 6.5	8 x 8 x 1	0...1.2
Ø 8	8 x 8 x 1	0...1.2
Ø 12	12 x 12 x 1	0...1.6


— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 4 (plain) XS1 and Ø 5 (M5 x 0.5) XS1
 2 Ø 6.5 (plain) XS1 and Ø 8 (M8 x 1) XS5
 3 Ø 12 (M12 x 1) XS5

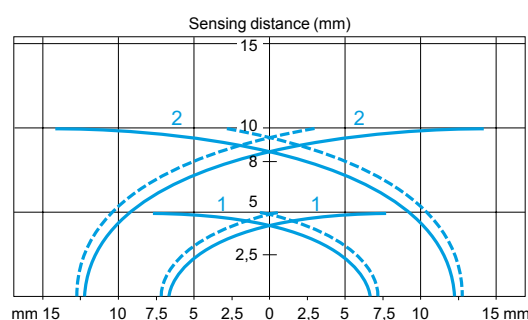

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 18	18 x 18 x 1	0...4
Ø 30	30 x 30 x 1	0...8


— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 18 (M18 x 1) XS5
 2 Ø 30 (M30 x 1.5) XS5

Non flush mountable in metal

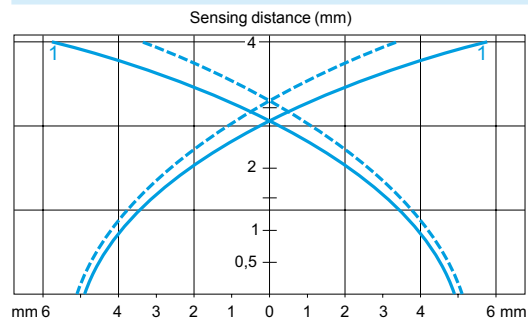

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 12	12 x 12 x 1	0...3.2

— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 12 (M12 x 1) XS4

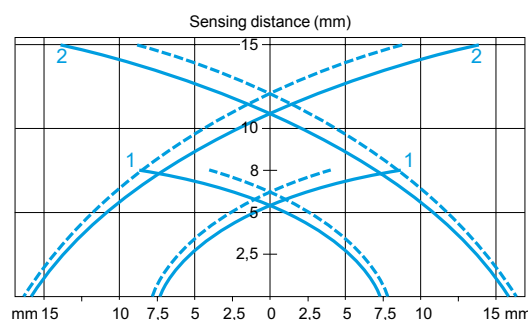


Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 18	24 x 24 x 1	0...6.4
Ø 30	45 x 45 x 1	0...12

— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 18 (M18 x 1) XS4
 2 Ø 30 (M30 x 1.5) XS4


Cylindrical type sensors, increased range

Flush mountable in metal

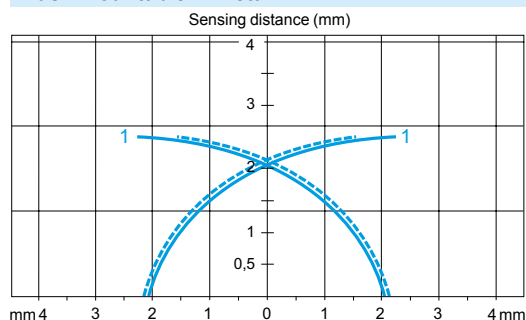


Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 6.5	8 x 8 x 1	0...2
Ø 8	8 x 8 x 1	0...2

— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 6.5 (plain) XS106B3●● and Ø 8 (M8 x 1) XS108B3 and XS608●●

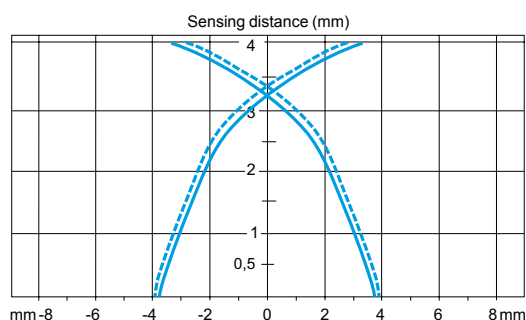


Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 12	12 x 12 x 1	0...3.2

— pick-up points
 - - - drop-out points (object approaching from the side)

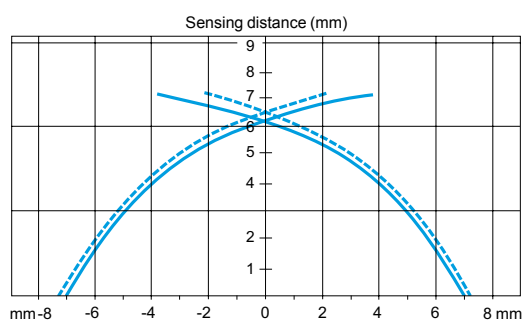

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 18	24 x 24 x 1	0...6.4

— pick-up points
 - - - drop-out points (object approaching from the side)

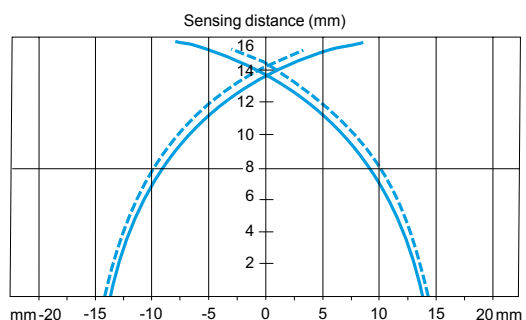


Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 30	45 x 45 x 1	0...12


— pick-up points
 - - - drop-out points (object approaching from the side)

Cubic, flat or rectangular type sensors


Flush mountable in metal

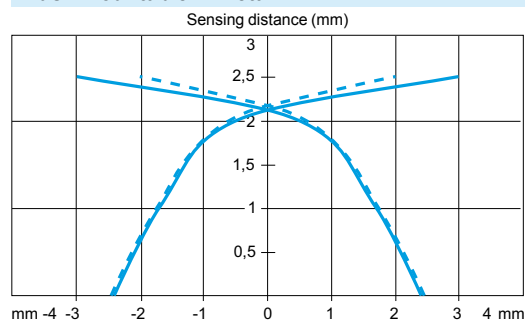


Sensor	Standard steel target (mm)	Operating zone (mm)
XS7J1A1	5 x 5 x 1	0...2
<i>— pick-up points</i> <i>- - - drop-out points (object approaching from the side)</i>		

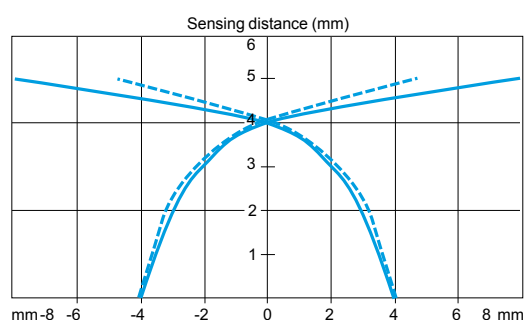


Sensor	Standard steel target (mm)	Operating zone (mm)
XS7F1A1	5 x 5 x 1	0...4
<i>— pick-up points</i> <i>- - - drop-out points (object approaching from the side)</i>		

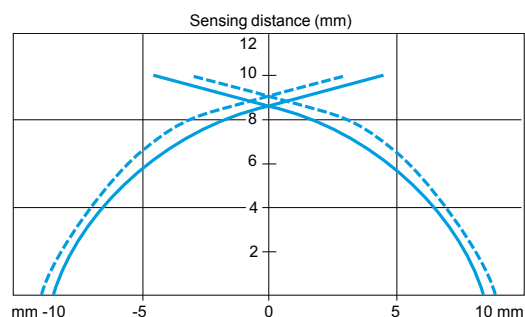

Sensor	Standard steel target (mm)	Operating zone (mm)
XS7E1A1	8 x 8 x 1	0...8
<i>— pick-up points</i> <i>- - - drop-out points (object approaching from the side)</i>		

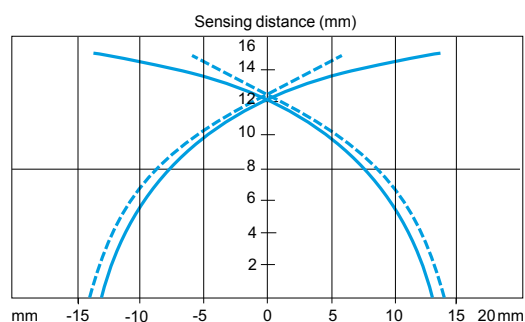


Sensor	Standard steel target (mm)	Operating zone (mm)
XS7C1A1 XS7C2A1 XS7C4A1	18 x 18 x 1	0...12
<i>— pick-up points</i> <i>- - - drop-out points (object approaching from the side)</i>		

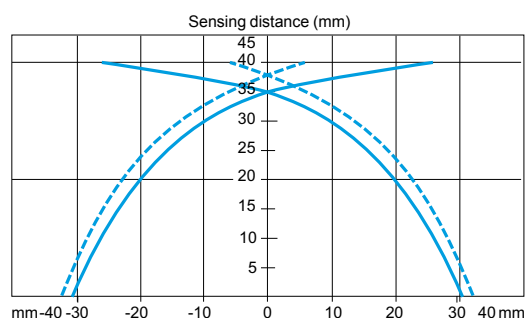

Sensor	Standard steel target (mm)	Operating zone (mm)
XS7D1A1	30 x 30 x 1	0...32
<i>— pick-up points</i> <i>- - - drop-out points (object approaching from the side)</i>		


Cubic or rectangular type sensors, increased range

Flush mountable in metal

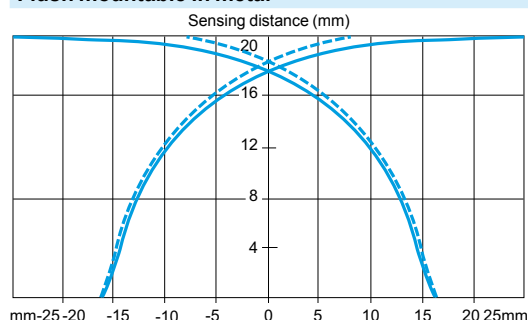

Sensor	Standard steel target (mm)	Operating zone (mm)
XS8C-A1	30 x 30 x 1	0...16
<i>— pick-up points</i> <i>- - - drop-out points (object approaching from the side)</i>		


Non flush mountable in metal

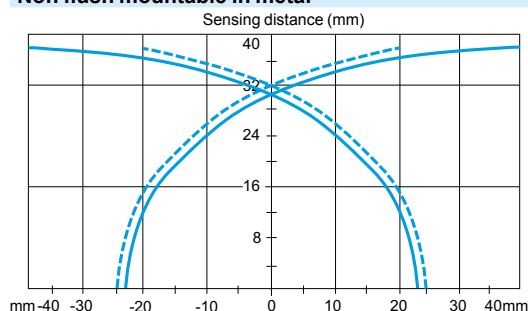


Sensor	Standard steel target (mm)	Operating zone (mm)
XS8C-A4	45 x 45 x 1	0...32
<i>— pick-up points</i> <i>- - - drop-out points (object approaching from the side)</i>		

Flat type sensors, increased range



Flush mountable in metal

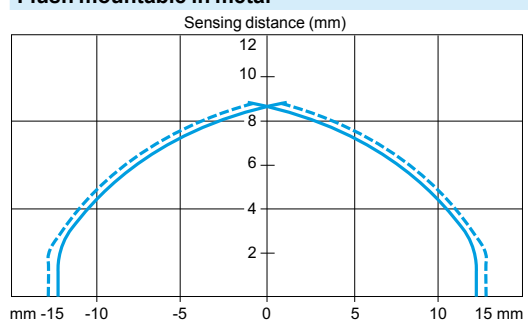



Non flush mountable in metal

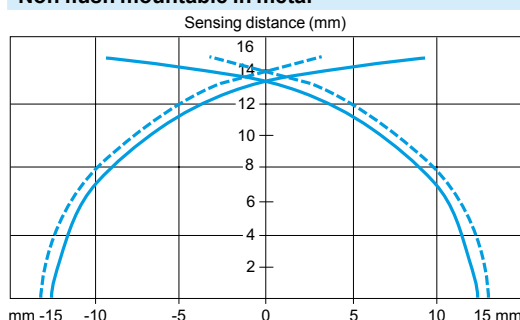

Sensor
XS8E
Standard steel target (mm)
18 x 18 x 1
Operating zone (mm)
5...15 (not flush mounted)
5...10 (flush mounted)

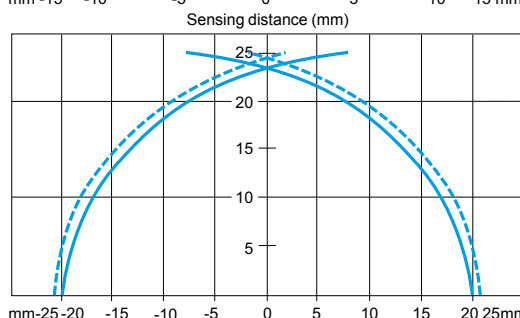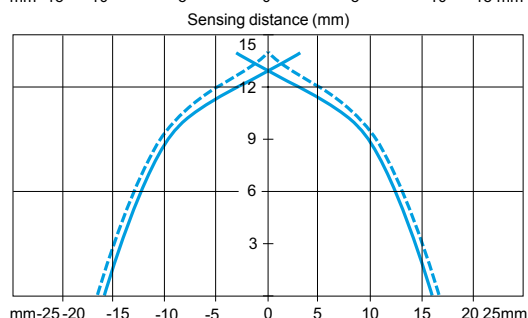

Sensor
XS8C
Standard steel target (mm)
30 x 30 x 1
Operating zone (mm)
8...25 (not flush mounted)
8...15 (flush mounted)

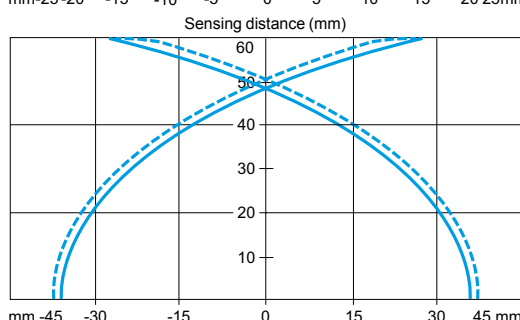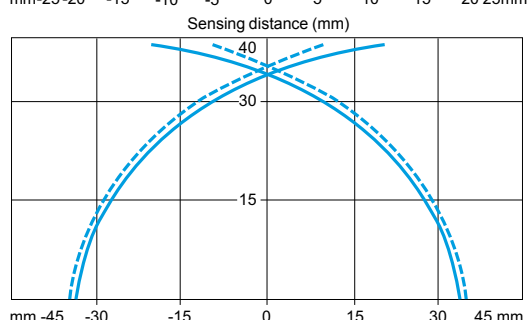

Sensor
XS8D
Standard steel target (mm)
45 x 45 x 1
Operating zone (mm)
20...60 (not flush mounted)
20...40 (flush mounted)

— pick-up points
- - - drop-out points (object approaching from the side)

Substitution table

Sensors with the closest functionalities

Inductive proximity sensors

Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor
Cylindrical type, DC					
Diameter 6.5 mm					
XS1					
XS1L06NA140	XS106BLNAL2	XS1M08DA214D	XS508B1CAM12	XS1N08PA349S	XS108B3PAM8
XS1L06PA140	XS106BLPAL2	XS1M08DA214LD	XS508B1CAL08M12	XS1N08PB349	XS108B3PBL2
				XS1N08PB349L1	XS108B3PBL5
				XS1N08PB349D	XS108B3PBM12
				XS1N08PB349S	XS108B3PBM8
XS1L06NA340	XS506B1NAL2	XS1M08NA370	XS508BLNAL2		
XS1L06NA340S	XS506B1NAM8	XS1M08NA370D	XS508BLNAM12	XS2	
XS1L06NB340	XS506B1NBL2	XS1M08NA370L1	XS508BLNAL5	XS2M08NA340	XS608B1NAL2
XS1L06NB340S	XS506B1NBM8	XS1M08NB370	XS508BLNBL2	XS2N08NA340	XS108B3NAL2
XS1L06PA340	XS506B1PAL2	XS1M08NB370D	XS508BLNBM12	XS2N08NA340D	XS108B3NAM12
XS1L06PA340L1	XS506B1PAL5	XS1M08PA370	XS508BLPAL2	XS2N08NA340L1	XS108B3NAL5
XS1L06PA340D	XS506B1PAM12	XS1M08PA370D	XS508BLPAM12	XS2N08NA340L2	XS108B3NAL10
XS1L06PA340S	XS506B1PAM8	XS1M08PA370L1	XS508BLPAL5	XS2N08NA340S	XS108B3NAM8
XS1L06PB340	XS506B1PBL2	XS1M08PA370L2	XS508BLPAL10	XS2N08NB340	XS108B3NBL2
XS1L06PB340L1	XS506B1PBL5	XS1M08PA370LD	XS508BLPAM12 (1)	XS2N08NB340D	XS108B3NBM12
XS1L06PB340S	XS506B1PBM8	XS1M08PA370S	XS508BLPAM12 (2)	XS2N08NB340S	XS108B3NBM8
		XS1M08PB370	XS508BLPBL2	XS2N08PA340	XS108B3PAL2
		XS1M08PB370D	XS508BLPBM12	XS2N08PA340D	XS108B3PAM12
		XS1M08PB370L1	XS508BLPBL5	XS2N08PA340L1	XS108B3PAL5
		XS1M08PB370L2	XS508BLPBL10	XS2N08PA340L2	XS108B3PAL10
XS1L06NA349	XS106B3NAL2			XS2N08PA340S	XS108B3PAM8
XS1L06NA349S	XS106B3NAM8	XS1N08NA340	XS508B1NAL2	XS2N08PB340	XS108B3PBL2
XS1L06NB349	XS106B3NBL2	XS1N08NA340D	XS508B1NAM12	XS2N08PB340D	XS108B3PBM12
XS1L06NB349S	XS106B3NBM8	XS1N08NA340L1	XS508B1NAL5	XS2N08PB340S	XS108B3PBM8
XS1L06PA349	XS106B3PAL2	XS1N08NA340L2	XS508B1NAL10		
XS1L06PA349L1	XS106B3PAL5	XS1N08NA340S	XS508B1NAM8	XS3	
XS1L06PA349D	XS106B3PAM12	XS1N08NB340	XS508B1NBL2	XS3P08NA340	XS508B1NAL2 (3)
XS1L06PA349S	XS106B3PAM8	XS1N08NB340D	XS508B1NBM12	XS3P08NA340D	XS508B1NAM12 (3)
XS1L06PB349	XS106B3PBL2	XS1N08NB340S	XS508B1NBM8	XS3P08NA340L1	XS508B1NAL5 (3)
XS1L06PB349L1	XS106B3PBL5	XS1N08PA340	XS508B1PAL2	XS3P08PA340	XS508B1PAL2 (3)
XS1L06PB349S	XS106B3PBM8	XS1N08PA340D	XS508B1PAM12	XS3P08PA340D	XS508B1PAM12 (3)
		XS1N08PA340L1	XS508B1PAL5	XS3P08PA340L1	XS508B1PAL5 (3)
		XS1N08PA340L2	XS508B1PAL10		
		XS1N08PA340LD	XS508B1PAM12	XS3P08NA370	XS508BLNAL2 (3)
		XS1N08PA340S	XS508B1PAM8	XS3P08NA370L1	XS508BLNAL5 (3)
		XS1N08PB340	XS508B1PBL2	XS3P08PA370	XS508BLPAL2 (3)
		XS1N08PB340D	XS508B1PBM12	XS3P08PA370L1	XS508BLPAL5 (3)
		XS1N08PB340L1	XS508B1PBL5		
		XS1N08PB340L2	XS508B1PBL10		
		XS1N08PB340S	XS508B1PBM8		
XS1M08DA210	XS508B1DAL2	XS1N08NA349	XS108B3NAL2		
XS1M08DA210D	XS508B1DAM12	XS1N08NA349L1	XS108B3NAL5		
XS1M08DA210L1	XS508B1DAL5	XS1N08NA349D	XS108B3NAM12		
XS1M08DA210L2	XS508B1DAL10	XS1N08NA349S	XS108B3NAM8		
XS1M08DA210LD	XS508B1DAL08M12	XS1N08NB349	XS108B3NBL2		
XS1M08DB210	XS508B1DBL2	XS1N08NB349L1	XS108B3NBL5		
XS1M08DB210D	XS508B1DBM12	XS1N08NB349D	XS108B3NBM12		
XS1M08DB210L1	XS508B1DBL5	XS1N08NB349S	XS108B3NBM8		
XS1M08DB210LD	XS508B1DBM12 (1)	XS1N08PA349	XS108B3PAL2		
		XS1N08PA349L1	XS108B3PAL5		
		XS1N08PA349D	XS108B3PAM12		

(1) For the new sensor an integral M12 connector replaces the remote M12 connector on a 0.80 m flying lead.

(2) For the new sensor an M12 connector replaces the M8 connector.

(3) For the new OsiSense XS sensor, the metal case replaces the plastic case.

Sensors with the closest functionalities

Inductive proximity sensors

Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor
Cylindrical type, DC (continued)					
Diameter 12 mm					
XS1					
XS1D12NA140	XS112BLNAL2	XS1N12NB340D	XS512B1NBM12		
XS1D12NA140D	XS112BLNAM12	XS1N12PA340	XS512B1PAL2		
XS1D12PA140	XS112BLPAL2	XS1N12PA340D	XS512B1PAM12	XS2N12NA340	XS112B3NAL2
XS1D12PA140D	XS112BLPAM12	XS1N12PA340L1	XS512B1PAL5	XS2N12NA340D	XS112B3NAM12
XS1D12PA140L1	XS112BLPAL5	XS1N12PA340L2	XS512B1PAL10	XS2N12NA340L1	XS112B3NAL5
		XS1N12PA340LD	XS512B1PAM12 (1)	XS2N12NA340L2	XS112B3NAL10
		XS1N12PA340S	XS512B1PAM12 (2)	XS2N12NB340	XS112B3NBL2
		XS1N12PB340	XS512B1PBL2	XS2N12NB340D	XS112B3NBM12
		XS1N12PB340D	XS512B1PBM12	XS2N12PA340	XS112B3PAL2
		XS1N12PB340L1	XS512B1PBL5	XS2N12PA340D	XS112B3PAM12
				XS2N12PA340L1	XS112B3PAL5
XS1M12DA210	XS512B1DAL2			XS2N12PA340L2	XS112B3PAL10
XS1M12DA210D	XS512B1DAM12			XS2N12PB340	XS112B3PBL2
XS1M12DA210L1	XS512B1DAL5	XS1M12PA349D	XS612B1PAM12	XS2N12PB340D	XS112B3PBM12
XS1M12DA210L2	XS512B1DAL10	XS1N12NA349	XS112B3NAL2	XS2N12PB340L1	XS112B3PBL5
XS1M12DA210LA	XS512B1DAL08U78	XS1N12NA349L1	XS112B3NAL5		
XS1M12DA210LD	XS512B1DAL08M12	XS1N12NA349D	XS112B3NAM12		
XS1M12DB210	XS512B1DBL2	XS1N12NB349	XS112B3NBL2		
XS1M12DB210D	XS512B1DBM12	XS1N12NB349L1	XS112B3NBL5	XS3	
XS1M12DB210L1	XS512B1DBL5	XS1N12NB349D	XS112B3NBM12	XS3P12NA340	XS512B1NAL2 (3)
XS1M12DB210L2	XS512B1DBL10	XS1N12PA349	XS112B3PAL2	XS3P12NA340D	XS512B1NAM12 (3)
XS1M12DB210LD	XS512B1DBL08M12	XS1N12PA349L1	XS112B3PAL5	XS3P12NA340L1	XS512B1NAL5 (3)
		XS1N12PA349D	XS112B3PAM12	XS3P12PA340	XS512B1PAL2 (3)
		XS1N12PB349	XS112B3PBL2	XS3P12PA340D	XS512B1PAM12 (3)
XS1M12DA214D	XS512B1CAM12	XS1N12PB349L1	XS112B3PBL5	XS3P12PA340L1	XS512B1PAL5 (3)
XS1M12DA214LD	XS512B1CAL08M12	XS1N12PB349D	XS112B3PBM12		
				XS3P12NA370	XS512BLNAL2 (3)
				XS3P12NA370L1	XS512BLNAL5 (3)
				XS3P12PA370	XS512BLPAL2 (3)
				XS3P12PA370L1	XS512BLPAL5 (3)
XS1M12NA370	XS512BLNAL2	XS2			
XS1M12NA370D	XS512BLNAM12	XS2D12NA140	XS212BLNAL2		
XS1M12NA370L1	XS512BLNAL5	XS2D12NA140D	XS212BLNAM12		
XS1M12NA370L2	XS512BLNAL10	XS2D12NA140L1	XS212BLNAL5		
XS1M12NA370S	XS612B1NAM12 (2)	XS2D12PA140	XS212BLPAL2		
XS1M12NB370	XS512BLNBL2	XS2D12PA140D	XS212BLPAM12		
XS1M12NB370D	XS512BLNBM12	XS2D12PA140L1	XS212BLPAL5		
XS1M12PA370	XS512BLPAL2				
XS1M12PA370D	XS512BLPAM12	XS2M12NA370	XS612B1NAL2		
XS1M12PA370L1	XS512BLPAL5	XS2M12NA370D	XS612B1NAM12		
XS1M12PA370L2	XS512BLPAL10	XS2M12NA370L1	XS612B1NAL5		
XS1M12PA370LA	XS612B1PAL08U78	XS2M12NA370L2	XS612B1NAL10		
XS1M12PA370LD	XS612B1PAL08M12	XS2M12NB370	XS612B1NBL2		
XS1M12PB370	XS512BLPBL2	XS2M12NB370D	XS612B1NBM12		
XS1M12PB370D	XS512BLPBM12	XS2M12PA370	XS612B1PAL2		
XS1M12PB370L1	XS512BLPBL5	XS2M12PA370D	XS612B1PAM12		
XS1M12PB370L2	XS512BLPBL10	XS2M12PA370L1	XS612B1PAL5		
XS1M12PB370LD	XS612B1PAM12 (1)	XS2M12PA370L2	XS612B1PAL10		
		XS2M12PA370LA	XS612B1PAL08U78		
		XS2M12PA370LD	XS612B1PAL08M12		
XS1N12NA340	XS512B1NAL2	XS2M12PB370	XS612B1PBL2		
XS1N12NA340D	XS512B1NAM12	XS2M12PB370D	XS612B1PBM12		
XS1N12NA340L1	XS512B1NAL5	XS2M12PB370L1	XS612B1PBL5		
XS1N12NA340L2	XS512B1NAL10	XS2M12PB370S	XS612B1PBM12 (2)		
XS1N12NB340	XS512B1NBL2				

(3) For the new OsiSense XS sensor, the metal case replaces the plastic case.

Inductive proximity sensors

[illegible]

(4) For the new sensor, connectors A, B, C and G on 0.1 m flying lead replace integral connectors A, B, C and G.

Sensors with the closest functionalities

Inductive proximity sensors

Old sensor	New OsiSense XS sensor
Cylindrical type, DC (<i>continued</i>)	
Diameter 30 mm	
XS1	
XS1D30NA140	XS130BLNAL2
XS1D30NA140D	XS130BLNAM12
XS1D30PA140	XS130BLPAL2
XS1D30PA140D	XS130BLPAM12
XS1D30PA140L1	XS130BLPAL5
XS2D30NA140	XS230BLNAL2
XS2D30NA140D	XS230BLNAM12
XS2D30PA140	XS230BLPAL2
XS2D30PA140D	XS230BLPAM12
XS1M30DA210	XS530B1DAL2
XS1M30DA210B	XS530B1DAL01B (4)
XS1M30DA210C	XS530B1DAL01C (4)
XS1M30DA210D	XS530B1DAM12
XS1M30DA210G	XS530B1DAL01G (4)
XS1M30DA210L1	XS530B1DAL5
XS1M30DA210L2	XS530B1DAL10
XS1M30DA210LD	XS530B1DAL08M12
XS1M30DB210	XS530B1DBL2
XS1M30DB210B	XS530B1DBL01B (4)
XS1M30DB210D	XS530B1DBM12
XS1M30DB210LD	XS530B1DBM12 (1)
XS1M30DA214D	XS530B1CAM12
XS1M30DA214LD	XS530B1CAL08M12
XS1M30PA349D	XS630B1PAM12 (5)
XS1M30NA370	XS530BLNAL2
XS1M30NA370B	XS630B1NAL01B (4)
XS1M30NA370C	XS630B1NAL01C (4)
XS1M30NA370D	XS530BLNAM12
XS1M30NA370L1	XS530BLNAL5
XS1M30NA370L2	XS530BLNAL10
XS1M30NB370	XS530BLNBL2
XS1M30NB370B	XS630B1NBL01B (4)
XS1M30NB370C	XS630B1NBL01C (4)
XS1M30NB370D	XS530BLNBM12
XS1M30NB370L1	XS530BLNBL5
XS1M30NB370L2	XS530BLNBL10
XS1M30PA370	XS530BLPAL2
XS1M30PA370A	XS630B1PAL01U78 (4)
XS1M30PA370B	XS630B1PAL01B (4)
XS1M30PA370C	XS630B1PAL01C (4)

Old sensor	New OsiSense XS sensor
XS1M30PA370D	XS530BLPAM12
XS1M30PA370G	XS630B1PAL01G (4)
XS1M30PA370L1	XS530BLPAL5
XS1M30PA370L2	XS530BLPAL10
XS1M30PB370	XS530BLPBL2
XS1M30PB370B	XS630B1PBL01B (4)
XS1M30PB370C	XS630B1PBL01C (4)
XS1M30PB370D	XS530BLPBM12
XS1M30PB370G	XS630B1PBL01G (4)
XS1M30PB370L1	XS530BLPBL5
XS1M30PB370L2	XS530BLPBL10
XS1N30NA340	XS530B1NAL2
XS1N30NA340D	XS530B1NAM12
XS1N30NA340L1	XS530B1NAL5
XS1N30NA340L2	XS530B1NAL10
XS1N30NB340	XS530B1NBL2
XS1N30NB340D	XS530B1NBM12
XS1N30PA340	XS530B1PAL2
XS1N30PA340D	XS530B1PAM12
XS1N30PA340L1	XS530B1PAL5
XS1N30PA340L2	XS530B1PAL10
XS1N30PB340	XS530B1PBL2
XS1N30PB340D	XS530B1PBM12
XS2	
XS2N30NA340	XS130B3NAL2
XS2N30NA340D	XS130B3NAM12
XS2N30NA340L1	XS130B3NAL5
XS2N30NA340L2	XS130B3NAL10
XS2N30NB340	XS130B3NBL2
XS2N30NB340D	XS130B3NBM12
XS2N30PA340	XS130B3PAL2
XS2N30PA340D	XS130B3PAM12
XS2N30PA340L1	XS130B3PAL5
XS2N30PA340L2	XS130B3PAL10
XS2N30PB340	XS130B3PBL2
XS2N30PB340D	XS130B3PBM12
XS2M30NA370	XS630B1NAL2
XS2M30NA370B	XS630B1NAL01B (4)
XS2M30NA370C	XS630B1NAL01C (4)
XS2M30NA370D	XS630B1NAM12
XS2M30NA370L1	XS630B1NAL5
XS2M30NA370L2	XS630B1NAL10
XS2M30NB370	XS630B1NBL2
XS2M30NB370B	XS630B1NBL01B (4)
XS2M30NB370C	XS630B1NBL01C (4)
XS2M30NB370D	XS630B1NBM12
XS2M30NB370L1	XS630B1NBL5

Old sensor	New OsiSense XS sensor
XS2M30NB370L2	XS630B1NBL10
XS2M30PA370	XS630B1PAL2
XS2M30PA370A	XS630B1PAL01U78 (4)
XS2M30PA370B	XS630B1PAL01B (4)
XS2M30PA370C	XS630B1PAL01C (4)
XS2M30PA370D	XS630B1PAM12
XS2M30PA370G	XS630B1PAL01G (4)
XS2M30PA370L1	XS630B1PAL5
XS2M30PA370L2	XS630B1PAL10
XS2M30PB370	XS630B1PBL2
XS2M30PB370B	XS630B1PBL01B (4)
XS2M30PB370C	XS630B1PBL01C (4)
XS2M30PB370D	XS630B1PBM12
XS2M30PB370G	XS630B1PBL01G (4)
XS2M30PB370L1	XS630B1PBL5
XS2M30PB370L2	XS630B1PBL10
XS3	
XS3P30NA340	XS530B1NAL2 (3)
XS3P30NA340D	XS530B1NAM12 (3)
XS3P30NA340L1	XS530B1NAL5 (3)
XS3P30PA340	XS530B1PAL2 (3)
XS3P30PA340D	XS530B1PAM12 (3)
XS3P30PA340L1	XS530B1PAL5 (3)
XS3P30PA340L2	XS530B1PAL10 (3)
XS3P30PA370	XS530BLPAL2 (3)
XS3P30PA370L1	XS530BLPAL5 (3)
XS3P30PA370L2	XS530BLPAL10 (3)
XS3P30NA370	XS530BL

(3) For the new OsiSense XS sensor, the metal case replaces the plastic case.

(5) For the new sensor, $S_n = 15$ mm instead of 20 mm.

Inductive proximity sensors

 Telemecanique
Sensors

Substitution table

Sensors with the closest functionalities

Inductive proximity sensors

Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor
Cylindrical type, AC or DC (continued)			
Diameter 30 mm			
XS1		XS3	
XS1M30FA264	XS130BLFAL2	XS3P30MA230	XS630B1MAL2 (3)
		XS3P30MA230K	XS630B1MAU20 (3)
		XS3P30MA230L1	XS630B1MAL5 (3)
		XS3P30MA230L2	XS630B1MAL10 (3)
		XS3P30MB230	XS630B1MBL2 (3)
		XS3P30MB230K	XS630B1MBU20 (3)
		XS3P30MB230L1	XS630B1MBL5 (3)
		XS4	
XS1M30MA230	XS530B1MAL2	XS4P30MA230B	XS4P30MA230L01B (4)
XS1M30MA230A	XS630B1MAL01U78 (4)	XS4P30MA230C	XS4P30MA230L01C (4)
XS1M30MA230B	XS630B1MAL01B (4)	XS4P30MA230G	XS4P30MA230L01G (4)
XS1M30MA230C	XS630B1MAL01C (4)	XS4P30MB230B	XS4P30MB230L01B (4)
XS1M30MA230G	XS630B1MAL01G (4)	XS4P30MB230C	XS4P30MB230L01C (4)
XS1M30MA230K	XS530B1MAU20		
XS1M30MA230L1	XS530B1MAL5		
XS1M30MA230L2	XS530B1MAL10		
XS1M30MB230	XS530B1MBL2		
XS1M30MB230A	XS630B1MBL01U78 (4)		
XS1M30MB230B	XS630B1MBL01B (4)		
XS1M30MB230C	XS630B1MBL01C (4)		
XS1M30MB230G	XS630B1MBL01G (4)		
XS1M30MB230K	XS530B1MBU20		
XS1M30MB230L1	XS530B1MBL5		
XS1M30MB230L2	XS530B1MBL10		
XS1M30MA239	XS630B1MAL2 (5)		
XS1M30MA239A	XS1M30MA239L01A (4)		
XS2			
XS2M30MA230	XS630B1MAL2		
XS2M30MA230A	XS630B1MAL01U78 (4)		
XS2M30MA230B	XS630B1MAL01B (4)		
XS2M30MA230C	XS630B1MAL01C (4)		
XS2M30MA230G	XS630B1MAL01G (4)		
XS2M30MA230K	XS630B1MAU20		
XS2M30MA230L1	XS630B1MAL5		
XS2M30MA230L2	XS630B1MAL10		
XS2M30MB230	XS630B1MBL2		
XS2M30MB230A	XS630B1MBL01U78 (4)		
XS2M30MB230B	XS630B1MBL01B (4)		
XS2M30MB230C	XS630B1MBL01C (4)		
XS2M30MB230G	XS630B1MBL01G (4)		
XS2M30MB230K	XS630B1MBU20		
XS2M30MB230L1	XS630B1MBL5		
XS2M30MB230L2	XS630B1MBL10		

(3) For the new OsiSense XS sensor, the metal case replaces the plastic case.

(4) For the new sensor, connectors A, B, C and G on 0.1 m flying lead replace integral connectors A, B, C and G.

(5) For the new sensor, Sn = 15 mm instead of 20 mm.

Technical information

Protective treatment of equipment according to climatic environment

Depending on the climatic and environmental conditions in which the equipment is placed, Telemecanique Sensors can offer specially adapted products to meet your requirements.

In order to make the correct choice of protective finish, two points should be remembered:

- the prevailing climate of the country is never the only criterion,
- only the atmosphere in the immediate vicinity of the equipment need be considered.

All climates treatment “TC”

This is the standard treatment for Telemecanique Sensors brand equipment and is suitable for the vast majority of applications. It is the equivalent of treatments described as “Klimafest”, “Climateproof”.

In particular, it meets the requirements specified in the following publications:

- Publication UTE C 63-100 (method I), successive cycles of humid heat at:
+ 40 °C and 95 % relative humidity.
- DIN 50016 - Variations of ambient conditions within a climatic chamber:
+ 23 °C and 83 % relative humidity,
+ 40 °C and 92 % relative humidity.

It also meets the requirements of the following marine classification societies: BV-LR-GL-DNV-RINA.

Characteristics

- Steel components are usually treated with zinc. When they have a mechanical function, they may also be painted.
- Insulating materials are selected for their high electrical, dielectric and mechanical characteristics.
- Metal enclosures have a stoved paint finish, applied over a primary phosphate protective coat, or are galvanised (e.g. some prefabricated busbar trunking components).

Limits for use of “TC” (All climates) treatment

- “TC” treatment is suitable for the following temperatures and humidity:

Temperature (°C)	Relative humidity (%)
20	95
40	80
50	50

“TC” treatment is therefore suitable for all latitudes and in particular tropical and equatorial regions where the equipment is mounted in normally ventilated industrial premises. Being sheltered from external climatic conditions, temperature variations are small, the risk of condensation is minimised and the risk of dripping water is virtually non-existent.

Extension of use of “TC” (All climates) treatment

In cases where the humidity around the equipment exceeds the conditions described above, or in equatorial regions if the equipment is mounted outdoors, or if it is placed in a very humid location (laundries, sugar refineries, steam rooms, etc.), “TC” treatment can still be used if the following precautions are taken:

- The enclosure in which the equipment is mounted must be protected with a “TH” finish (see next page) and must be well ventilated to avoid condensation and dripping water (e.g. enclosure base plate mounted on spacers).
- Components mounted inside the enclosure must have a “TC” finish.
- If the equipment is to be switched off for long periods, a heater must be provided (0.2 to 0.5 kW per square decimetre of enclosure), that switches on automatically when the equipment is turned off. This heater keeps the inside of the enclosure at a temperature slightly higher than the outside surrounding temperature, thereby avoiding any risk of condensation and dripping water (the heat produced by the equipment itself during normal running is sufficient to provide this temperature difference).
- Special considerations for “Operator dialog” and “Detection” products: for certain pilot devices, the use of “TC” treatment can be extended to outdoor use provided their enclosure is made of light alloys, zinc alloys or plastic material. In this case, it is also essential to ensure that the degree of protection against penetration of liquids and solid objects is suitable for the applications involved.

Technical information

Protective treatment of equipment according to climatic environment

"TH" treatment for hot and humid environments

This treatment is suitable for hot and humid atmospheres where installations are regularly subject to condensation, dripping water and the risk of fungi.

In addition, plastic insulating components are resistant to attacks from insects such as termites and cockroaches. These properties have often led to this treatment being described as "Tropical Finish", but this does not mean that all equipment installed in tropical and equatorial regions must systematically have undergone "TH" treatment. On the other hand, certain operating conditions in temperate climates may well require the use of "TH" treated equipment (see limitations for use of "TC" treatment).

Special characteristics of "TH" treatment

- All insulating components are made of materials which are either resistant to fungi or treated with a fungicide, and which have increased resistance to creepage (Standards IEC 60112, NF C 26-220, DIN 5348).
- Metal enclosures receive a top-coat of stoved, fungicidal paint, applied over a rust inhibiting undercoat. Components with "TH" treatment may be subject to a surcharge (1). Please consult your Customer Care Centre.

Protective treatment selection guide

Surrounding environment	Duty cycle	Internal heating of enclosure when not in use	Type of climate	Protective treatment	
				of equip-ment	of enclo-sure
Indoors					
No dripping water or condensation	Unimportant	Not necessary	Unimportant	"TC"	"TC"
Presence of dripping water or condensation	Frequent switching off for periods of more than 1 day	No	Temperate	"TC"	"TH"
			Equatorial	"TH"	"TH"
	Yes	Unimportant	"TC"	"TH"	
	Continuous	Not necessary	Unimportant	"TC"	"TH"
Outdoors (sheltered)					
No dripping water or dew	Unimportant	Not necessary	Temperate	"TC"	"TC"
			Equatorial	"TH"	"TH"
Exposed outdoors or near the sea					
Frequent and regular presence of dripping water or dew	Frequent switching off for periods of more than 1 day	No	Temperate	"TC"	"TH"
			Equatorial	"TH"	"TH"
	Yes	Unimportant	"TC"	"TH"	
	Continuous	Not necessary	Unimportant	"TC"	"TH"

These treatments cover, in particular, the applications defined by methods I and II of guide UTE C 63-100.

Special precautions for electronic equipment

Electronic products always meet the requirements of "TC" treatment. A number of them are "TH" treated as standard.

Some electronic products (for example: programmable controllers, flush mountable controllers CCX and flush mountable operator terminals XBT) require the use of an enclosure providing a degree of protection to at least IP 54, as defined by standards IEC 60664 and NF C 20 040, for use in industrial applications or in environmental conditions requiring "TH" treatment.

These electronic products, including flush mountable products, must have a degree of protection to at least IP 20 (provided either by their own enclosure or by their installation method) for restricted access locations where the degree of pollution does not exceed 2 (a test booth not containing machinery or other dust producing activities, for example).

Special treatments

For particularly harsh industrial environments, Telemecanique Sensors is able to offer special protective treatments. Please consult your Customer Care Centre.

(1) A large number of the Telemecanique Sensors brand products are "TH" treated as standard and are, therefore, not subject to a surcharge.

Technical information

Product standards and certifications

Standardisation

Conformity to standards

Telemecanique Sensors products satisfy, in the majority of cases, national (for example: BS in Great Britain, NF in France, DIN in Germany), European (for example: CENELEC) or international (IEC) standards. These product standards precisely define the performance of the designated products (such as IEC 60947 for low voltage equipment).

When used correctly, as designated by the manufacturer and in accordance with regulations and correct practices, these products will allow users to build equipment, machine systems or installations that conform to their appropriate standards (for example: IEC 60204-1, relating to electrical equipment used on industrial machines).

Telemecanique Sensors is able to provide proof of conformity of its production to the standards it has chosen to comply with, through its quality assurance system.

On request, and depending on the situation, Telemecanique Sensors can provide the following:

- a declaration of conformity,
- a certificate of conformity (ASEFA/LOVAG),
- a homologation certificate or approval, in the countries where this procedure is required or for particular specifications, such as those existing in the merchant navy.

Code	Certification authority		Country
	Name	Abbreviation	
ANSI	American National Standards Institute	ANSI	USA
BS	British Standards Institution	BSI	Great Britain
CEI	Comitato Elettrotecnico Italiano	CEI	Italy
DIN/VDE	Verband Deutscher Elektrotechniker	VDE	Germany
EN	Comité Européen de Normalisation Electrotechnique	CENELEC	Europe
GOST	Gosudarstvennoe Komitet Standartov	GOST	Russia
IEC	International Electrotechnical Commission	IEC	Worldwide
JIS	Japanese Industrial Standards Committee	JISC	Japan
NBN	Institut Belge de Normalisation	IBN	Belgium
NEN	Nederlands Normalisatie Instituut	NNI	Netherlands
NF	Union Technique de l'Electricité	UTE	France
SAA	Standards Association of Australia	SAA	Australia
UNE	Asociación Española de Normalización y Certificación	AENOR	Spain

European EN standards

These are technical specifications established in conjunction with, and with approval of, the relative bodies within the various CENELEC member countries (European Union, European Free Trade Association and many central and eastern European countries having «member» or «affiliated» status). Prepared in accordance with the principle of consensus, the European standards are the result of a weighted majority vote. Such adopted standards are then integrated into the national collection of standards, and contradictory national standards are withdrawn.

European standards incorporated within the French collection of standards carry the prefix NF EN. At the 'Union Technique de l'Electricité' (*Technical Union of Electricity*) (UTE), the French version of a corresponding European standard carries a dual number: European reference (NF EN ...) and classification index (C ...).

Therefore, the standard NF EN 60947-4-1 relating to motor contactors and starters, effectively constitutes the French version of the European standard EN 60947-4-1 and carries the UTE classification C 63-110.

This standard is identical to the British standard BS EN 60947-4-1 or the German standard DIN EN 60947-4-1.

Whenever reasonably practical, European standards reflect the international standards (IEC).

With regard to automation system components and distribution equipment, in addition to complying with the requirements of French NF standards, Telemecanique Sensors brand components conform to the standards of all other major industrial countries.

Regulations

European Directives

Opening up of European markets assumes harmonisation of the regulations pertaining to each of the member countries of the European Union.

The purpose of the European Directive is to eliminate obstacles hindering the free circulation of goods within the European Union, and it must be applied in all member countries. Member countries are obliged to transcribe each Directive into their national legislation and to simultaneously withdraw any contradictory regulations. The Directives, in particular those of a technical nature which concern us, only establish the objectives to be achieved, referred to as "essential requirements".

The manufacturer must take all the necessary measures to ensure that his products conform to the requirements of each Directive applicable to his production.

As a general rule, the manufacturer certifies conformity to the essential requirements of the Directive(s) for his product by affixing the CE mark.

The CE mark is affixed to Telemecanique Sensors brand products concerned, in order to comply with French and European regulations.

Significance of the CE mark

- The CE mark affixed to a product signifies that the manufacturer certifies that the product conforms to the relevant European Directive(s) which concern it; this condition must be met to allow free distribution and circulation within the countries of the European Union of any product subject to one or more of the E.U. Directives.
- The CE mark is intended solely for national market control authorities.
- The CE mark must not be confused with a conformity marking.

Technical information

Product standards and certifications

European Directives (continued)

For electrical equipment, only conformity to standards signifies that the product is suitable for its designated function, and only the guarantee of an established manufacturer can provide a high level of quality assurance.

For Telemecanique Sensors brand products, one or several Directives are likely to be applicable, depending on the product, and in particular:

- the Low Voltage Directive 2006/95/EC: the CE mark relating to this Directive has been compulsory since 16th January 2007.
- the Electromagnetic Compatibility Directive 89/336/EEC, amended by Directives 92/31/EEC and 93/68/EEC: the CE mark on products covered by this Directive has been compulsory since 1st January 1996.

ASEFA-LOVAG certification

The function of ASEFA (Association des Stations d'Essais Française d'Appareils électriques - Association of French Testing Stations for Low Voltage Industrial Electrical Equipment) is to carry out tests of conformity to standards and to issue certificates of conformity and test reports. ASEFA laboratories are authorised by the French authorisation committee (COFRAC). ASEFA is now a member of the European agreement group LOVAG (Low Voltage Agreement Group). This means that any certificates issued by LOVAG/ASEFA are recognised by all the authorities which are members of the group and carry the same validity as those issued by any of the member authorities.

Quality labels

When components can be used in domestic and similar applications, it is sometimes recommended that a "Quality label" be obtained, which is a form of certification of conformity.

Code	Quality label	Country
CEBEC	Comité Electrotechnique Belge	Belgium
KEMA-KEUR	Keuring van Electrotechnische Materialen	Netherlands
NF	Union Technique de l'Electricité	France
ÖVE	Österreichischer Verband für Electrotechnik	Austria
SEMKO	Svenska Elektriska Materiel Kontrollnatanalen	Sweden

Product certifications

In some countries, the certification of certain electrical components is a legal requirement. In this case, a certificate of conformity to the standard is issued by the official test authority.

Each certified device must bear the relevant certification symbols when these are mandatory:

Code	Certification authority	Country
CSA	Canadian Standards Association	Canada
UL	Underwriters Laboratories	USA
CCC	China Compulsory Certification	China

Note on certifications issued by the Underwriters Laboratories (UL). There are two levels of approval:

- "Recognized" (UL)** The component is fully approved for inclusion in equipment built in a workshop, where the operating limits are known by the equipment manufacturer and where its use within such limits is acceptable by the Underwriters Laboratories.
The component is not approved as a "Product for general use" because its manufacturing characteristics are incomplete or its application possibilities are limited.
A "Recognized" component does not necessarily carry the certification symbol.
- "Listed" (UL)** The component conforms to all the requirements of the classification applicable to it and may therefore be used both as a "Product for general use" and as a component in assembled equipment. A "Listed" component must carry the certification symbol.

Marine classification societies

Prior approval (= certification) by certain marine classification societies is generally required for electrical equipment which is intended for use on board merchant vessels.

Code	Classification authority	Country
BV	Bureau Veritas	France
DNV	Det Norske Veritas	Norway
GL	Germanischer Lloyd	Germany
LR	Lloyd's Register	Great Britain
NKK	Nippon Kaiji Kyokai	Japan
RINA	Registro Italiano Navale	Italy
RRS	Register of Shipping	Russia

Note

For further details on a specific product, please refer to the "Characteristics" pages in this catalogue or consult your Customer Care Centre.

Technical information

Degrees of protection provided by enclosures IP code

Degrees of protection against the penetration of solid bodies, water and personnel access to live parts

The European standard EN 60529 dated October 1991, IEC publication 529 (2nd edition - November 1989), defines a coding system (IP code) for indicating the degree of protection provided by electrical equipment enclosures against accidental direct contact with live parts and against the ingress of solid foreign objects or water. This standard does not apply to protection against the risk of explosion or conditions such as humidity, corrosive gasses, fungi or vermin.

Certain equipment is designed to be mounted on an enclosure which will contribute towards achieving the required degree of protection (example : control devices mounted on an enclosure).

Different parts of an equipment can have different degrees of protection (example : enclosure with an opening in the base).

Standard NF C 15-100 (May 1991 edition), section 512, table 51 A, provides a cross-reference between the various degrees of protection and the environmental conditions classification, relating to the selection of equipment according to external factors.

Practical guide UTE C 15-103 shows, in the form of tables, the characteristics required for electrical equipment (including minimum degrees of protection), according to the locations in which they are installed.

IP ●●● code

The IP code comprises **2 characteristic numerals** (e.g. **IP 55**) and may include **an additional letter** when the actual protection of personnel against direct contact with live parts is better than that indicated by the first numeral (e.g. IP 20C).

Any characteristic numeral which is unspecified is replaced by an X (e.g. IP XXB).

1st characteristic numeral:





corresponds to protection of the equipment against penetration of solid objects and protection of personnel against direct contact with live parts.

2nd characteristic numeral:

corresponds to protection of the equipment against penetration of water with harmful effects.

Additional letter:

corresponds to protection of personnel against direct contact with live parts.

Protection of the equipment		Protection of personnel				
0	Non-protected	Non-protected	0	Non-protected	A	With the back of the hand.
1	 Protected against the penetration of solid objects having a diameter greater than or equal to 50 mm.	Protected against direct contact with the back of the hand (accidental contacts).	1	 Protected against vertical dripping water, (condensation).	B	With the finger.
2	 Protected against the penetration of solid objects having a diameter greater than or equal to 12.5 mm.	Protected against direct finger contact.	2	 Protected against dripping water at an angle of up to 15°.	C	With a Ø 2.5 mm tool.
3	 Protected against the penetration of solid objects having a diameter greater than or equal to 2.5 mm.	Protected against direct contact with a Ø 2.5 mm tool.	3	 Protected against rain at an angle of up to 60°.	D	With a Ø 1 mm wire.
4	 Protected against the penetration of solid objects having a diameter greater than or equal to 1 mm.	Protected against direct contact with a Ø 1 mm wire.	4	 Protected against splashing water in all directions.		
5	 Dust protected (no harmful deposits).	Protected against direct contact with a Ø 1 mm wire.	5	 Protected against water jets in all directions.		
6	 Dust tight.	Protected against direct contact with a Ø 1 mm wire.	6	 Protected against powerful jets of water and waves.		
			7	 Protected against the effects of temporary immersion.		
			8	 Protected against the effects of prolonged immersion under specified conditions.		

Technical information

Degrees of protection provided by enclosures IK code

Degrees of protection against mechanical impact

The European standard EN 50102 dated March 1995 defines a coding system (IK code) for indicating the degree of protection provided by electrical equipment enclosures against external mechanical impact.

Standard NF C 15-100 (May 1991 edition), section 512, table 51 A, provides a cross-reference between the various degrees of protection and the environmental conditions classification, relating to the selection of equipment according to external factors.





Practical guide UTE C 15-103 shows, in the form of tables, the characteristics required for electrical equipment (including minimum degrees of protection), according to the locations in which they are installed.

IK ●● code

The IK code comprises **2 characteristic numerals** (e.g. **IK 05**).

2 characteristic numerals:

corresponding to a value of impact energy.

		h (cm)	Energy (J)
00	Non-protected		
01		7.5	0.15
02		10	0.2
03		17.5	0.35
04		25	0.5
05		35	0.7
06		20	1
07		40	2
08		30	5
09		20	10
10		40	20

A					
AB1FU10135U	128	XS1M30KP340D	64	XS1N30NB349D	74
		XS1M30KPM40	121	XS1N30NC410	62
		XS1M30KPM40LD	121	XS1N30NC410D	62
X		XS1M30MA250	60	XS1N30PA349	74
XS1L04NA310S	76	XS1M30MA250K	60	XS1N30PA349D	74
XS1L04NA311	76	XS1M30MB250	60	XS1N30PB349	74
XS1L04NA311S	76	XS1M30MB250K	60	XS1N30PB349D	74
XS1L04NB310	76	XS1M30PAW01D	117	XS1N30PC410	62
XS1L04NB310S	76	XS1N05NA310	76	XS1N30PC410D	62
XS1L04NB311	76	XS1N05NA311	76	XS2L2SANAL2	98
XS1L04NB311S	76	XS1N05NA311S	76	XS2L2SANAM12	98
XS1L04PA310	76	XS1N05NB310	76	XS2L2SAPAL2	98
XS1L04PA310S	76	XS1N05NB311	76	XS2L2SAPAM12	98
XS1L04PA311	76	XS1N05NB311S	76	XS2L06NA340	76
XS1L04PA311S	76	XS1N05PA310	76	XS2L06NA340D	76
XS1L04PB310	76	XS1N05PA311	76	XS2L06NA340S	76
XS1L04PB310S	76	XS1N05PA311S	76	XS2L06NB340	76
XS1L04PB311	76	XS1N05PB310	76	XS2L06NB340D	76
XS1L04PB311S	76	XS1N05PB311	76	XS2L06NB340S	76
XS1L06NA349	74	XS1N05PB311S	76	XS2L06PA340	76
XS1L06NA349D	74	XS1N08NA349	74	XS2L06PA340D	76
XS1L06NA349S	74	XS1N08NA349D	74	XS2L06PA340S	76
XS1L06NB349	74	XS1N08NA349S	74	XS2L06PB340	76
XS1L06NB349S	74	XS1N08NB349	74	XS2L06PB340D	76
XS1L06NC410	62	XS1N08NB349D	74	XS2L06PB340S	76
XS1L06PA349	74	XS1N08NB349S	74	XS2M08NC410	62
XS1L06PA349D	74	XS1N08PA349	74	XS2M08NC410D	62
XS1L06PA349S	74	XS1N08PA349D	74	XS2M08PC410	62
XS1L06PB349	74	XS1N08PA349S	74	XS2M08PC410D	62
XS1L06PB349S	74	XS1N08PB349	74	XS2M12KP340	64
XS1L06PC410	62	XS1N08PB349D	74	XS2M12KP340D	64
XS1M08NC410	62	XS1N08PB349S	74	XS2M12MA250	60
XS1M08NC410D	62	XS1N12NA349	74	XS2M12MA250K	60
XS1M08PC410	62	XS1N12NA349D	74	XS2M12MB250	60
XS1M08PC410D	62	XS1N12NB349	74	XS2M12PAW01D	117
XS1M12AB120	87	XS1N12NB349D	74	XS2M18KP340	64
XS1M12KP340	64	XS1N12NC410	62	XS2M18KP340D	64
XS1M12KP340D	64	XS1N12NC410D	62	XS2M18MA250	60
XS1M12MA250	60	XS1N12PA349	74	XS2M18MA250K	60
XS1M12MA250K	60	XS1N12PA349D	74	XS2M18MB250	60
XS1M12MB250	60	XS1N12PB349	74	XS2M18MB250K	60
XS1M12MB250K	60	XS1N12PB349D	74	XS2M30KP340	64
XS1M12PAW01D	116	XS1N12PC410	62	XS2M30KP340D	64
XS1M18AB120	88	XS1N12PC410D	62	XS2M30MA250	60
XS1M18KP340	64	XS1N18NA349	74	XS2M30MA250K	60
XS1M18KP340D	64	XS1N18NA349D	74	XS2M30MB250	60
XS1M18KPM40	120	XS1N18NB349	74	XS2M30MB250K	60
XS1M18KPM40D	120	XS1N18NB349D	74	XS2N12NC410	62
XS1M18MA250	60	XS1N18NC410	62	XS2N12NC410D	62
XS1M18MA250K	60	XS1N18NC410D	62	XS2N12PC410	62
XS1M18MB250	60	XS1N18PA349	74	XS2N12PC410D	62
XS1M18MB250K	60	XS1N18PA349D	74	XS2N18NC410	62
XS1M18PAS20	126	XS1N18PB349	74	XS2N18NC410D	62
XS1M18PAS20D	127	XS1N18PB349D	74	XS2N18PC410	62
XS1M18PAS40	126	XS1N18PC410	62	XS2N18PC410D	62
XS1M18PAS40D	127	XS1N18PC410D	62	XS2N30NC410	62
XS1M18PAW01D	116	XS1N30NA349	74	XS2N30NC410D	62
XS1M30AB120	89	XS1N30NA349D	74	XS2N30PC410	62
XS1M30KP340	64	XS1N30NB349	74	XS2N30PC410D	62
				XS4P08MA230	66
				XS4P08MA230K	66
				XS4P08MB230	66
				XS4P08MB230K	66
				XS4P08NA340	66
				XS4P08NA370	66
				XS4P08NB340	66
				XS4P08NB370	66
				XS4P08PA340	66
				XS4P08PA370	66
				XS4P08PB340	66
				XS4P08PB370	66
				XS4P12AB110	87
				XS4P12AB120	87
				XS4P12KP340	64
				XS4P12KP340D	64
				XS4P12MA230	66
				XS4P12MA230K	66
				XS4P12MB230	66
				XS4P12MB230K	66
				XS4P12NA340	66
				XS4P12NA370	66
				XS4P12NB340	66
				XS4P12NB370	66
				XS4P12PA340	66
				XS4P12PA370	66
				XS4P12PB340	66
				XS4P12PB370	66
				XS4P18AB110	88
				XS4P18AB120	88
				XS4P18KP340	64
				XS4P18KP340D	64
				XS4P18MA230	66
				XS4P18MA230K	66
				XS4P18MB230	66
				XS4P18MB230K	66
				XS4P18NA340	66
				XS4P18NA370	66
				XS4P18NB340	66
				XS4P18NB370	66
				XS4P18PA340	66
				XS4P18PA370	66
				XS4P18PB340	66
				XS4P18PB370	66
				XS4P30AB110	89
				XS4P30AB120	89
				XS4P30KP340	64
				XS4P30KP340D	64
				XS4P30MA230	66
				XS4P30MA230K	66
				XS4P30MB230	66
				XS4P30MB230K	66
				XS4P30NA340	66
				XS4P30NA370	66
				XS4P30NB340	66
				XS4P30NB370	66
				XS4P30PA340	66
				XS4P30PA370	66
				XS4P30PB340	66
				XS4P30PB370	66
				XS7C1A1CAL01M12	48
				XS7C1A1CAL08M12	48
				XS7C1A1DAL01M12	48
				XS7C1A1DAL2	48
				XS7C1A1DAM8	48
				XS7C1A1DBL01M12	48
				XS7C1A1DBL2	48
				XS7C1A1DBM8	48
				XS7C1A1NAL01M12	48
				XS7C1A1NAL2	48
				XS7C1A1NAM8	48
				XS7C1A1NBL01M12	48
				XS7C1A1NBL2	48
				XS7C1A1NBM8	48
				XS7C1A1PAL01M12	48
				XS7C1A1PAL2	48
				XS7C1A1PAM8	48
				XS7C1A1PBL01M12	48
				XS7C1A1PBL2	48
				XS7C1A1PBM8	48
				XS7C40DA210	54
				XS7C40DP210	54
				XS7C40FP260	56
				XS7C40KPM40	124
				XS7C40MP230	56
				XS7C40NC440	54
				XS7C40NC449	54
				XS7C40PC440	54
				XS7C40PC449	54
				XS7D1A1CAM12	48
				XS7D1A1DAL2	48
				XS7D1A1DAM12	48
				XS7D1A1DBL2	48
				XS7D1A1DBM12	48
				XS7D1A1NAL2	48
				XS7D1A1NAM12	48
				XS7D1A1NBL2	48
				XS7D1A1NBM12	48
				XS7D1A1PAL2	48
				XS7D1A1PAM12	48
				XS7D1A1PBL2	48
				XS7D1A1PBM12	48
				XS7D1A3CAM12DIN	112
				XS7E1A1CAL01M12	48
				XS7E1A1CAL08M12	48
				XS7E1A1DAL01M12	48
				XS7E1A1DAL2	48
				XS7E1A1DAM8	48
				XS7E1A1DBL01M12	48
				XS7E1A1DBL2	48
				XS7E1A1DBM8	48
				XS7E1A1NAL01M12	48
				XS7E1A1NAL2	48
				XS7E1A1NAM8	48
				XS7E1A1NBL01M12	48
				XS7E1A1NBL2	48
				XS7E1A1NBM8	48
				XS7E1A1PAL01M12	48

XS7E1A1PAL2	48	XS8C1A1PBM8	80	XS9D111A1L2	91	XS112B3NAL2TQ	34	XS130BLPAM12	71
XS7E1A1PAM8	48	XS8C40DA210	54	XS9D111A1M12	91	XS112B3NAM12	34	XS130BLPBL2	71
XS7E1A1PBL01M12	48	XS8C40DP210	54	XS9D111A2L2	93	XS112B3NAM12TQ	34	XS130BLPBM12	71
XS7E1A1PBL2	48	XS8C40FP260	56	XS9D111A2M12	93	XS112B3NBL2	34	XS208ALNAL2	68
XS7E1A1PBM8	48	XS8C40MP230	56	XS9E111RMBL01U20	85	XS112B3NBM12	34	XS208ALNBL2	68
XS7F1A1DAL01M8	46	XS8C40NC440	54	XS9E111RPBL01M12	85	XS112B3PAL2	34	XS208ALPAL2	68
XS7F1A1DAL2	46	XS8C40NC449	54	XS9E111A1L01M12	91	XS112B3PAL2TQ	34	XS208ALPBL2	68
XS7F1A1DBL01M8	46	XS8C40PC440	54	XS9E111A1L2	91	XS112B3PAM12	34	XS208BLNAL2	70
XS7F1A1DBL2	46	XS8C40PC449	54	XS9E111A2L01M12	93	XS112B3PAM12TQ	34	XS208BLNAM8	70
XS7F1A1NAL01M8	46	XS8D1A1MAL2	80	XS9E111A2L2	93	XS112B3PBL2	34	XS208BLNAM12	70
XS7F1A1NAL2	46	XS8D1A1MAU20	80	XS9F111A1L01M8	91	XS112B3PBM12	34	XS208BLNBL2	70
XS7F1A1NBL01M8	46	XS8D1A1MBL2	80	XS9F111A1L2	91	XS112B3PBM12TQ	34	XS208BLNBM8	70
XS7F1A1NBL2	46	XS8D1A1MBU20	80	XS9F111A2L01M8	93	XS112BLFAL2	70	XS208BLNBM12	70
XS7F1A1PAL01M8	46	XS8D1A1NAL2	80	XS9F111A2L2	93	XS112BLNAL2	70	XS208BLPAL2	70
XS7F1A1PAL2	46	XS8D1A1NAM12	80	XS106B3NAL2	34	XS112BLNAM12	70	XS208BLPAM8	70
XS7F1A1PBL01M8	46	XS8D1A1NBL2	80	XS106B3NAM8	34	XS112BLNBL2	70	XS208BLPAM12	70
XS7F1A1PBL2	46	XS8D1A1NBM12	80	XS106B3NBL2	34	XS112BLNBM12	70	XS208BLPBL2	70
XS7G12MA230	110	XS8D1A1PAL2	80	XS106B3NBM8	34	XS112BLPAL2	70	XS208BLPBM8	70
XS7G12MB230	110	XS8D1A1PAM12	80	XS106B3PAL2	34	XS112BLPAM12	70	XS208BLPBM12	70
XS7G12NA140	108	XS8D1A1PBL2	80	XS106B3PAL2TQ	34	XS112BLPBL2	70	XS212AANAL2	102
XS7G12NA140S	108	XS8D1A1PBM12	80	XS106B3PAM8	34	XS112BLPBM12	70	XS212AANAM12	102
XS7G12NC440	108	XS8E1A1MAL01U20	80	XS106B3PAM8TQ	34	XS118B3NAL2	35	XS212AAPAL2	102
XS7G12PA140	108	XS8E1A1MAL2	80	XS106B3PAM12	34	XS118B3NAL2TQ	35	XS212AAPAM12	102
XS7G12PA140S	108	XS8E1A1MBL01U20	80	XS106B3PBL2	34	XS118B3NAM12	35	XS212ALNAL2	68
XS7G12PC440	108	XS8E1A1MBL2	80	XS106B3PBM8	34	XS118B3NAM12TQ	35	XS212ALNAM12	68
XS7J1A1DAL01M8	46	XS8E1A1NAL01M12	80	XS106BLNAL2	70	XS118B3NBL2	35	XS212ALNBL2	68
XS7J1A1DAL2	46	XS8E1A1NAL2	80	XS106BLNBL2	70	XS118B3NBM12	35	XS212ALNBM12	68
XS7J1A1DBL01M8	46	XS8E1A1NAM8	80	XS106BLPAL2	70	XS118B3PAL2	35	XS212ALPAL2	68
XS7J1A1DBL2	46	XS8E1A1NBL01M12	80	XS106BLPBL2	70	XS118B3PAL2TQ	35	XS212ALPAM12	68
XS7J1A1NAL01M8	46	XS8E1A1NBL2	80	XS108B3NAL2	34	XS118B3PAM12	35	XS212ALPBL2	68
XS7J1A1NAL2	46	XS8E1A1NBM8	80	XS108B3NAL2TQ	34	XS118B3PAM12TQ	35	XS212ALPBM12	68
XS7J1A1NBL01M8	46	XS8E1A1PAL01M12	80	XS108B3NAM8	34	XS118B3PBL2	35	XS212BLNAL2	70
XS7J1A1NBL2	46	XS8E1A1PAL2	80	XS108B3NAM8TQ	34	XS118B3PBM12	35	XS212BLNAM12	70
XS7J1A1PAL01M8	46	XS8E1A1PAM8	80	XS108B3NAM12	34	XS118BLFAL2	71	XS212BLNBL2	70
XS7J1A1PAL2	46	XS8E1A1PBL01M12	80	XS108B3NBL2	34	XS118BLNAL2	71	XS212BLNBM12	70
XS7J1A1PBL01M8	46	XS8E1A1PBL2	80	XS108B3NBM8	34	XS118BLNAM12	71	XS212BLPAL2	70
XS7J1A1PBL2	46	XS8E1A1PBM8	80	XS108B3NBM12	34	XS118BLNBL2	71	XS212BLPAM12	70
XS7T4DA210	58	XS8G12MA230	110	XS108B3PAL2	34	XS118BLNBM12	71	XS212BLPBL2	70
XS7T4DA214LD	58	XS8G12MB230	110	XS108B3PAL2TQ	34	XS118BLPAL2	71	XS212BLPBM12	70
XS7T4DA214LD01	58	XS8G12NA140	108	XS108B3PAM8	34	XS118BLPAM12	71	XS212SANAL2	98
XS7T4NC440	58	XS8G12NA140S	108	XS108B3PAM8TQ	34	XS118BLPBL2	71	XS212SANAM12	98
XS7T4NC440LD	58	XS8G12NC440	108	XS108B3PAM12	34	XS118BLPBM12	71	XS212SAPAL2	98
XS7T4PC440	58	XS8G12PA140	108	XS108B3PAM12TQ	34	XS130B3NAL2	35	XS212SAPAM12	98
XS7T4PC440LD	58	XS8G12PA140S	108	XS108B3PBL2	34	XS130B3NAM12	35	XS218AAMAL2	104
XS8C1A1MAL01U20	80	XS8G12PC440	108	XS108B3PBM8	34	XS130B3NAM12TQ	35	XS218AAMAU20	104
XS8C1A1MAL2	80	XS8T4NC440	58	XS108B3PBM12	34	XS130B3NBL2	35	XS218AANAL2	102
XS8C1A1MBL01U20	80	XS8T4NC440LD	58	XS108BLNAL2	70	XS130B3NBM12	35	XS218AANAM12	102
XS8C1A1MBL2	80	XS8T4PC440	58	XS108BLNAM8	70	XS130B3PAL2	35	XS218AAPAL2	102
XS8C1A1NAL01M12	80	XS8T4PC440LD	58	XS108BLNAM12	70	XS130B3PAL2TQ	35	XS218AAPAM12	102
XS8C1A1NAL2	80	XS9C2A1NCM12	122	XS108BLNBL2	70	XS130B3PAM12	35	XS218ALNAL2	68
XS8C1A1NAM8	80	XS9C2A1PCM12	122	XS108BLNBM8	70	XS130B3PAM12TQ	35	XS218ALNAM12	68
XS8C1A1NBL01M12	80	XS9C4A1NCP20	122	XS108BLNBM12	70	XS130B3PBL2	35	XS218ALNBL2	68
XS8C1A1NBL2	80	XS9C4A1PCP20	122	XS108BLPAL2	70	XS130B3PBM12	35	XS218ALNBM12	68
XS8C1A1NBM8	80	XS9C111RMBL01U20	85	XS108BLPAM8	70	XS130BLFAL2	71	XS218ALPAL2	68
XS8C1A1PAL01M12	80	XS9C111RPBL01M12	85	XS108BLPAM12	70	XS130BLNAL2	71	XS218ALPAM12	68
XS8C1A1PAL2	80	XS9C111A1L01M12	91	XS108BLPBL2	70	XS130BLNAM12	71	XS218ALPBL2	68
XS8C1A1PAM8	80	XS9C111A1L2	91	XS108BLPBM8	70	XS130BLNBL2	71	XS218ALPBM12	68
XS8C1A1PBL01M12	80	XS9C111A2L01M12	93	XS108BLPBM12	70	XS130BLNBM12	71	XS218BLNAL2	71
XS8C1A1PBL2	80	XS9C111A2L2	93	XS112B3NAL2	34	XS130BLPAL2	71	XS218BLNAM12	71

XS218BLNBL2	71	XS508B1DAM12	29	XS512BSDAL2	28	XS530B1NAM12	24	XS612B2NAL01M12	78
XS218BLNBM12	71	XS508B1DBL2	29	XS512BSDAM12	28	XS530B1NBL2	24	XS612B2NBL01M12	78
XS218BLPAL2	71	XS508B1DBM12	29	XS512BSDBL2	28	XS530B1NBM12	24	XS612B2PAL01M12	78
XS218BLPAM12	71	XS508B1NAL2	24	XS512BSDBM12	28	XS530B1PAL2	24	XS612B2PBL01M12	78
XS218BLPBL2	71	XS508B1NAM8	24	XS518B1CAL08M12	29	XS530B1PAM12	24	XS612B3DAL2	38
XS218BLPBM12	71	XS508B1NAM12	24	XS518B1CAM12	29	XS530B1PBL2	24	XS612B3DAM12	38
XS218SAMAL2	100	XS508B1NBL2	24	XS518B1DAL01B	29	XS530B1PBM12	24	XS612B3DBL2	38
XS218SAMAU20	100	XS508B1NBM8	24	XS518B1DAL01C	29	XS530BLNAL2	25	XS612B3DBM12	38
XS218SANAL2	98	XS508B1NBM12	24	XS518B1DAL01G	29	XS530BLNAM12	25	XS612B4NAL2	42
XS218SANAM12	98	XS508B1PAL2	24	XS518B1DAL2	29	XS530BLNBL2	25	XS612B4NAM12	42
XS218SAPAL2	98	XS508B1PAM8	24	XS518B1DAL2TF	29	XS530BLNBM12	25	XS612B4NBL2	42
XS218SAPAM12	98	XS508B1PAM12	24	XS518B1DAM12	29	XS530BLPAL2	25	XS612B4NBM12	42
XS230AAMAL2	104	XS508B1PBL2	24	XS518B1DBL01B	29	XS530BLPAM12	25	XS612B4PAL2	42
XS230AAMAU20	104	XS508B1PBM8	24	XS518B1DBL2	29	XS530BLPBL2	25	XS612B4PAM12	42
XS230AANAL2	102	XS508B1PBM12	24	XS518B1DBL08M12	29	XS530BLPBM12	25	XS612B4PBL2	42
XS230AANAM12	102	XS508BLNAL2	25	XS518B1DBM12	29	XS530BSCAL08M12	28	XS612B4PBM12	42
XS230AAPAL2	102	XS508BLNAM12	25	XS518B1MAL2	32	XS530BSCAM12	28	XS618B1DAL2	38
XS230AAPAM12	102	XS508BLNBL2	25	XS518B1MAU20	32	XS530BSDAL2	28	XS618B1DAM12	38
XS230ALNAL2	68	XS508BLNBM12	25	XS518B1MBL2	32	XS530BSDAM12	28	XS618B1DBL2	38
XS230ALNAM12	68	XS508BLPAL2	25	XS518B1MBU20	32	XS530BSDBL2	28	XS618B1DBM12	38
XS230ALNBL2	68	XS508BLPAM12	25	XS518B1NAL2	24	XS530BSDBM12	28	XS618B1MAL01B	40
XS230ALNBM12	68	XS508BLPBL2	25	XS518B1NAM12	24	XS606B1DAL2	38	XS618B1MAL01C	40
XS230ALPAL2	68	XS508BLPBM12	25	XS518B1NBL2	24	XS606B1DBL2	38	XS618B1MAL01G	40
XS230ALPAM12	68	XS508BSCAL01M12	28	XS518B1NBM12	24	XS606B3CAL01M12	38	XS618B1MAL2	40
XS230ALPBL2	68	XS508BSCAL2	28	XS518B1PAL2	24	XS606B3CAL2	38	XS618B1MAU20	40
XS230ALPBM12	68	XS508BSCAL08M12	28	XS518B1PAM12	24	XS606B3CBL2	38	XS618B1MBL01B	40
XS230BLNAL2	71	XS508BSCBL01M12	28	XS518B1PBL2	24	XS608B1DAL2	38	XS618B1MBL01C	40
XS230BLNAM12	71	XS508BSCBL2	28	XS518B1PBM12	24	XS608B1DAM12	38	XS618B1MBL01G	40
XS230BLNBL2	71	XS512B1CAL08M12	29	XS518BLNAL2	25	XS608B1DBL2	38	XS618B1MBL2	40
XS230BLNBM12	71	XS512B1CAM12	29	XS518BLNAM12	25	XS608B1DBM12	38	XS618B1MBU20	40
XS230BLPAL2	71	XS512B1DAL2	29	XS518BLNBL2	25	XS608B1NAL2	36	XS618B1NAL01B	36
XS230BLPAM12	71	XS512B1DAL08U78	29	XS518BLNBM12	25	XS608B1NAM12	36	XS618B1NAL01C	36
XS230BLPBL2	71	XS512B1DAM12	29	XS518BLPAL2	25	XS608B1NBL2	36	XS618B1NAL2	36
XS230BLPBM12	71	XS512B1DBL2	29	XS518BLPAM12	25	XS608B1NBM12	36	XS618B1NAM12	36
XS230SAMAL2	100	XS512B1DBL08M12	29	XS518BLPBL2	25	XS608B1PAL2	36	XS618B1NBL01B	36
XS230SAMAU20	100	XS512B1DBM12	29	XS518BLPBM12	25	XS608B1PAM12	36	XS618B1NBL01C	36
XS230SANAL2	98	XS512B1MAL2	32	XS518BSCAL08M12	28	XS608B1PBL2	36	XS618B1NBL2	36
XS230SANAM12	98	XS512B1MAU20	32	XS518BSCAM12	28	XS608B1PBM12	36	XS618B1NBM12	36
XS230SAPAL2	98	XS512B1MBL2	32	XS518BSDAL2	28	XS608B3CAL01M12	38	XS618B1PAL01B	36
XS230SAPAM12	98	XS512B1MBU20	32	XS518BSDAM12	28	XS608B3CAL2	38	XS618B1PAL01C	36
XS506B1NAL2	24	XS512B1NAL2	24	XS518BSDBL2	28	XS608B3CBL01M12	38	XS618B1PAL01G	36
XS506B1NAM8	24	XS512B1NAM12	24	XS518BSDBM12	28	XS608B3CBL2	38	XS618B1PAL2	36
XS506B1NBL2	24	XS512B1NBL2	24	XS530B1CAL08M12	29	XS612B1DAL2	38	XS618B1PAM12	36
XS506B1NBM8	24	XS512B1NBM12	24	XS530B1CAM12	29	XS612B1DAM12	38	XS618B1PBL01B	36
XS506B1PAL2	24	XS512B1PAL2	24	XS530B1DAL01B	29	XS612B1DBL2	38	XS618B1PBL01C	36
XS506B1PAM8	24	XS512B1PAM12	24	XS530B1DAL01C	29	XS612B1DBM12	38	XS618B1PBL2	36
XS506B1PAM12	24	XS512B1PBL2	24	XS530B1DAL01G	29	XS612B1MAL2	40	XS618B1PBM12	36
XS506B1PBL2	24	XS512B1PBM12	24	XS530B1DAL2	29	XS612B1MAU20	40	XS618B2NAL01M12	78
XS506B1PBM8	24	XS512BLNAL2	25	XS530B1DAL2TF	29	XS612B1MBL2	40	XS618B2NBL01M12	78
XS506BLNAL2	25	XS512BLNAM12	25	XS530B1DAM12	29	XS612B1MBU20	40	XS618B2PAL01M12	78
XS506BLPAL2	25	XS512BLNBL2	25	XS530B1DBL01B	29	XS612B1NAL2	36	XS618B2PBL01M12	78
XS506BSCAL01M12	28	XS512BLNBM12	25	XS530B1DBL2	29	XS612B1NAM12	36	XS618B3DAL2	38
XS506BSCAL2	28	XS512BLPAL2	25	XS530B1DBM12	29	XS612B1NBL2	36	XS618B3DAM12	38
XS506BSCBL2	28	XS512BLPAM12	25	XS530B1MAL2	32	XS612B1NBM12	36	XS618B3DBL2	38
XS508B1CAL08M12	29	XS512BLPBL2	25	XS530B1MAU20	32	XS612B1PAL2	36	XS618B3DBM12	38
XS508B1CAM12	29	XS512BLPBM12	25	XS530B1MBL2	32	XS612B1PAM12	36	XS618B4MAL2	44
XS508B1DAL2	29	XS512BSCAL08M12	28	XS530B1MBU20	32	XS612B1PBL2	36	XS618B4MAU20	44
XS508B1DAL08M12	29	XS512BSCAM12	28	XS530B1NAL2	24	XS612B1PBM12	36	XS618B4MBL2	44

XS618B4MBU20	44	XS908R4PAM12	106	XSZB118	24	XSZE218	128
XS618B4NAL2	42	XS908R4PAM12	107		25	XSZE230	128
XS618B4NAM12	42	XS912R1PAM12	106		28	XSZE308	128
XS618B4NBL2	42	XS912R1PAM12	107		29	XSZE312	128
XS618B4NBM12	42	XS912R4PAM12	106		32	XSZE318	128
XS618B4PAL2	42	XS912R4PAM12	107		35	XSZE330	128
XS618B4PAM12	42	XS912RWPAM12	114		36	XSZF10	128
XS618B4PBL2	42	XS912RWPAM12	115		38	XSZP112	128
XS618B4PBM12	42	XS912S1PAM12	96		40	XSZP118	128
XS630B1DAL2	38	XS912S1PAM12	97		42	XSZP130	128
XS630B1DAM12	38	XS912S4PAM12	96		44	XSZPE13	128
XS630B1DBL2	38	XS912S4PAM12	97		60	XSZPKC2	123
XS630B1DBM12	38	XS918R1PAM12	106		62	XSZPSC2	123
XS630B1MAL01B	40	XS918R1PAM12	107		64	XSZVF03	128
XS630B1MAL01C	40	XS918R4PAM12	106		68	XSZVF04	128
XS630B1MAL01G	40	XS918R4PAM12	107	XSZB130	71	XSZVF05	128
XS630B1MAL2	40	XS918RWPAM12	114		74	XTAZ30	128
XS630B1MAU20	40	XS918RWPAM12	115		78	XUZA118	96
XS630B1MBL01B	40	XS918S1PAM12	96		102		98
XS630B1MBL01C	40	XS918S1PAM12	97		104		100
XS630B1MBL01G	40	XS918S4PAM12	96		128	XUZB32	128
XS630B1MBL2	40	XS918S4PAM12	97			XUZB2005	98
XS630B1MBU20	40	XS930R1PAM12	106			XUZE04	128
XS630B1NAL01B	36	XS930R1PAM12	107			XUZE06	128
XS630B1NAL01C	36	XS930R4PAM12	106			XUZE08	128
XS630B1NAL2	36	XS930R4PAM12	107			XZCP1141L2	106
XS630B1NAM12	36	XS930S1PAM12	96				114
XS630B1NBL01B	36	XS930S1PAM12	97			XZCP1141L5	106
XS630B1NBL01C	36	XS930S4PAM12	96				114
XS630B1NBL2	36	XS930S4PAM12	97			XZCP1141L10	106
XS630B1NBM12	36	XSAV11373	83	XSZB165	24		114
XS630B1PAL01B	36	XSAV11801	83		25	XZCP1241L2	106
XS630B1PAL01C	36	XSAV12373	83		28		114
XS630B1PAL01G	36	XSAV12801	83		35	XZCP1241L5	106
XS630B1PAL2	36	XSCZ01	128		38		114
XS630B1PAM12	36	XSZA020	128		71	XZCP1241L10	106
XS630B1PBL01B	36	XSZA034	128		74		114
XS630B1PBL01C	36	XSZB104	128	XSZBC00	128	XZCPA1141L2	96
XS630B1PBL01G	36	XSZB105	128	XSZBC10	128		98
XS630B1PBL2	36	XSZB108	24	XSZBC90	128		102
XS630B1PBM12	36		25	XSZBD10	128	XZCPA1141L5	96
XS630B2NAL01M12	78		28	XSZBE00	128		98
XS630B2NBL01M12	78		29	XSZBE10	128	XZCPA1141L10	96
XS630B2PAL01M12	78		35	XSZBE90	128		98
XS630B2PBL01M12	78		36	XSZBF00	128		102
XS630B3DAL2	38		38	XSZBF90	128	XZCPA1241L2	96
XS630B3DAM12	38		62	XSZBJ00	128		98
XS630B3DBL2	38		68	XSZBJ90	128		102
XS630B3DBM12	38		71	XSZBPM12	78	XZCPA1241L5	96
			74		85		98
XS630B4MAL2	44	XSZB112	128		128	XZCPA1241L10	96
XS630B4MAU20	44		24	XSZBS12	96		98
XS630B4MBL2	44		25		98		102
XS630B4MBU20	44		28	XSZBS30	96	XZCPA1865L5	100
XS630B4NAL2	42		29		98		104
XS630B4NAM12	42		32		98	XZCPA1865L10	100
XS630B4NBL2	42		35		100		104
XS630B4NBM12	42		36	XSZE105	128	XZCPA1965L5	100
XS630B4PAL2	42		38	XSZE108	128		104
XS630B4PAM12	42		40	XSZE112	128	XZCPA1965L10	100
XS630B4PBL2	42		42	XSZE118	128		104
XS630B4PBM12	42		60	XSZE130	128	XZCRA151140A2	98
XS908R1PAM12	106		62	XSZE208	128		102
XS908R1PAM12	107		64	XSZE212	128	XZCRA151140A5	98
			68				102
			71				
			74				
			78				
			102				
			104				
			128				

Schneider Electric Industries SAS

www.tesensors.com

Head Office
35, rue Joseph Monier
F-92500 Reuil-Malmaison
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric